



**Cybex 710T Treadmill
Owner's & Service Manual
Cardiovascular Systems
Part Number LT-14464-4 Rev H**

Cybex and the Cybex logo are registered trademarks of Cybex International, Inc. Stableflex and the Stableflex logo are registered trademarks of Cybex International, Inc. Polar is a registered trademark of Polar.

DISCLAIMER: Cybex International, Inc. makes no representations or warranties regarding the contents of this manual. We reserve the right to revise this document at any time or to make changes to the product described within it without notice or obligation to notify any person of such revisions or changes.

© 2001, Cybex International, Inc. All rights reserved. Printed in United States of America.

10 Trotter Drive Medway, MA 02053 • 800-766-3211 • 508-533-4300 • FAX 508-533-5183
www.eCybex.com • techhelp@cybexintl.com • techpubs@cybexintl.com • LT-14464-4 Rev H • December 2001

About This Manual

For your convenience, all measurements and voltage requirements are listed in both English and metric units. English values are listed first, followed by metric units in parentheses. For example: 1" (2.54 cm).

The 710T Treadmill is a newer model that has replaced the former 645CR model. This manual, part number LT-14464, should be referred to for 645CR questions. An Owner's Manual is shipped with each 710T Treadmill.

To contact Cybox with comments about this manual you may send email to techpubs@cyboxintl.com.

FCC Compliance Information

! WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio TV technician for help.

Declaration of Conformity

We declare that to the best of our knowledge that the fitness equipment listed below, and manufactured by:

Cybex International, Inc.
10 Trotter Drive
Medway MA, 02053, USA

Conforms to:

Directives: 73/23/EEC, 89/336/EEC

Standards: EN60335-1, EN55022, EN55014, EN50082-1

Product Name:	Treadmill
Model Numbers:	400T, 410T, 700T, 710T (220V)
European Contact:	Attention: European Sales Director Room 1, Floor 3, Tredegar Chambers, 78 Bridge Street, Newport, South Wales, NP204AQ Phone 011-44-1633-251222

NOTE: For European customers only.

Table of Contents

Front Pages

About this Manual	i
FCC Compliance Information	i
Declaration of Conformity	ii
Table of Contents	iii

1 Safety

Important Voltage Information	1-1
Grounding Instructions	1-1
Important Safety Instructions	1-2
Caution Labels	1-4
Emergency Stop	1-5

2 Technical Specifications

Specifications	2-1
----------------	-----

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide	3-1
Stopping the Treadmill	3-3
Control During Operation	3-4
Data Readouts	3-5
Selecting Programs & Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program	3-8
P2 - Weight Loss Program	3-10
P3 - Cardiovascular Program	3-12
P4 - Speed Challenge Program	3-14
P5 - Express Program	3-16
P6 - Hill Interval Program	3-17
P7 - Speed Interval Program	3-18
P8 - Pike's Peak Program	3-19
P9 - River Run Program	3-20
P10 - 5 Kilometer Program	3-21
P11 - Demonstration Program	3-22
P101-P110 - Saved Program	3-22
Workout Tips	3-24

4 Preventive Maintenance

Regular Maintenance Activities	4-1
Cleaning Your Treadmill	4-1
Running Belt Maintenance	4-2
Other Preventive Maintenance	4-6
Service Schedule	4-7
Log Sheet	4-8

5 Setup & Assembly

Quick Setup	5-1
Choosing & Preparing a Site	5-1
Electrical Power Requirements	5-3
Unpacking	5-3
Assembling the Treadmill	5-4
Testing the 710T Operation	5-9
Setting Operation Options	5-10

6 Customer Service

Contacting Service	6-1
Serial Number & Voltage	6-1
Warranty	6-1
Return Material Authorization (RMA)	6-4
Damaged Parts	6-5
Ordering Parts	6-5

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

Cybex 710T Treadmill Owner's Manual

1- Safety

IMPORTANT: Read all instructions and warnings before using the treadmill.


Important Voltage Information

Before plugging the power cord into an electrical outlet, verify that the voltage requirements for your area match the voltage of the treadmill that you have received. The voltage label is on the front of your treadmill. The power requirements for the 710T treadmill are a grounded, dedicated circuit, and one of the following: 115 VAC, 60 Hz and 20 amps, or 230 VAC, 50 Hz, and 15 amps, or 208/220 VAC, 60 Hz and 15 amps.

! WARNINGS: Do not attempt to use this unit with a voltage adapter.
Do not attempt to use this unit with an extension cord.

Grounding Instructions

This treadmill is intended for commercial use. This treadmill must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This product is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

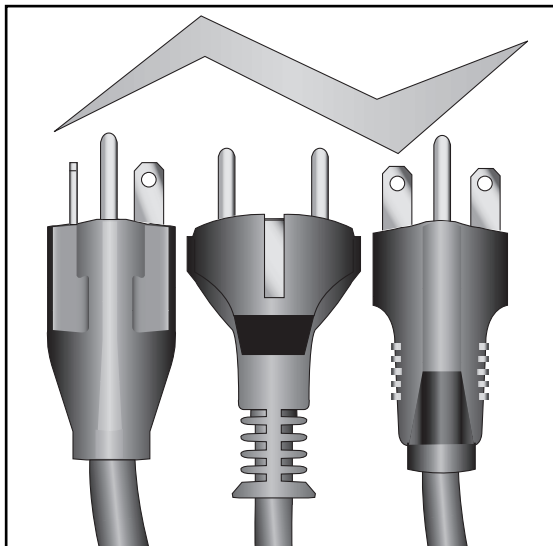

115 VAC NEMA 5-20 Euro Plug CEE 7/7 208/220 VAC NEMA 6-15

! DANGER:
Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or service provider if you are in doubt as to whether the treadmill is properly grounded. Seek a qualified electrician to perform any modifications to the cord or plug. Cybox is not responsible for injuries or damages as a result of cord or plug modification.

This treadmill is for use on a

Front Pages
About this Manual i
FCC Compliance Information i
Declaration of Conformity ii
Table of Contents iii

1 Safety
Important Voltage Information 1-1
Grounding Instructions 1-1
Important Safety Instructions 1-2
Caution Labels. 1-4
Emergency Stop 1-5

grounded, dedicated circuit, and one of the following: 115 VAC, 60 Hz and 20 amps, or 230 VAC, 60 Hz, and 15 amps, or 220/240 VAC, 50 Hz and 15 amps. Make sure that the treadmill is connected to an outlet having the same configuration as the plug. Do not use a ground plug adapter to adapt the power cord to a non-grounded outlet.

Important Safety Instructions

(Save These Instructions)

! DANGER: *To reduce the risk of electric shock, always unplug this treadmill from the electrical outlet immediately after using it and before cleaning it.*

! WARNING: *Serious injury could occur if these precautions are not observed. To reduce the risk of burns, fires, electric shock, or injury:*

- Obtain a medical exam before beginning any exercise program.
- Keep children away from the treadmill. Teenagers and disabled persons must be supervised while using.
- Stop exercising if you feel faint, dizzy, or experience pain at any time while exercising and consult your physician.
- Use the treadmill handrails for support and to maintain balance.
- Use caution when mounting and dismounting the treadmill.
- Disconnect all power before servicing the treadmill.
- Use a dedicated line when operating the treadmill.
- Connect the treadmill to a properly grounded outlet only.
- Do not operate electrically powered treadmills in damp or wet locations.
- Keep the running belt clean and dry at all times.
- Stop and place the treadmill at 0 degrees incline (level) after each use.
- Do not leave the treadmill unattended when plugged in and running. After turning off the treadmill, don't leave it until it comes to a complete stop and is level. To disconnect, turn all controls to the STOP or OFF position, and then remove the plug from the outlet.
- Inspect the treadmill for worn or loose components before each use. Do not use until worn or damaged parts are replaced.
- Maintain and replace worn parts regularly. Refer to "Preventive Maintenance" Section of Owner's Manual.

Cybex 710T Treadmill Owner's Manual

- Do not operate the treadmill if the cord is damaged, if the treadmill is not working properly, or if the treadmill has been dropped or damaged. Seek service from a qualified technician.
- Do not place the cord near heated surfaces or sharp edges.
- Do not use the treadmill outdoors.
- Do not operate the treadmill around or where aerosol (spray) or where oxygen products are being used.
- Read and understand the Owner's Manual completely before using the treadmill.
- Read and understand emergency stop procedures before using the treadmill.
- Read and understand all warnings posted on the treadmill and in the Owner's Manual before using the treadmill.
- Replace any warning label if damaged, worn or illegible.
- Do not wear loose or dangling clothing while using the treadmill.
- Always wear proper footwear on or around exercise equipment.
- Keep all body parts, hair, towels, water bottles, and the like free and clear of moving parts.
- Set up and operate the treadmill on a solid, level surface. Do not operate in recessed areas or on plush carpet.
- Provide the following clearances: 39 inches (1 m) at each side, 78 inches (2 m) at the back, and enough room for safe access and passage at the front of the treadmill. Be sure your treadmill is clear of walls, equipment, and other hard surfaces.
- Do not attempt repairs, electrical or mechanical. Seek trained repair personnel when servicing. Contact the nearest authorized Cybex dealer or other competent repair service.
- Use Cybex factory parts when replacing parts on the treadmill.
- Do not modify the treadmill in any way.
- Do not use attachments unless recommended for the treadmill by Cybex.
- Report any malfunctions, damage or repairs to the facility.
- Do not use the treadmill if you exceed 400 lbs. (181 kg). This is the rated maximum user weight.

Front Pages





About this Manual	i
FCC Compliance Information	i
Declaration of Conformity	ii
Table of Contents	iii


1 Safety

Important Voltage Information	1-1
Grounding Instructions	1-1
Important Safety Instructions	1-2
Caution Labels.	1-4
Emergency Stop	1-5

Caution Labels

Caution labels indicate a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury. The caution labels used on the 710T are shown below. The complete parts list and exploded view is in chapter 7 of this manual and on the web. To replace any worn or damaged labels do one of the following: Visit eCybex.com to shop for parts online, or fax your order to 508-533-5183. To speak with a customer service representative, in most areas call 800-766-3211. Otherwise call 508-533-4300.

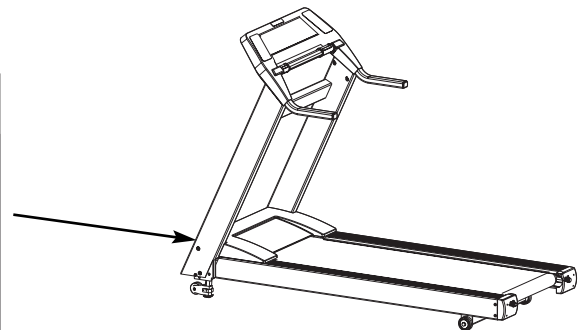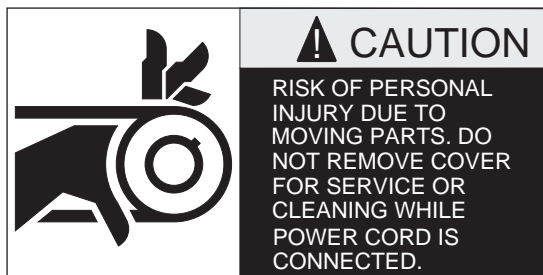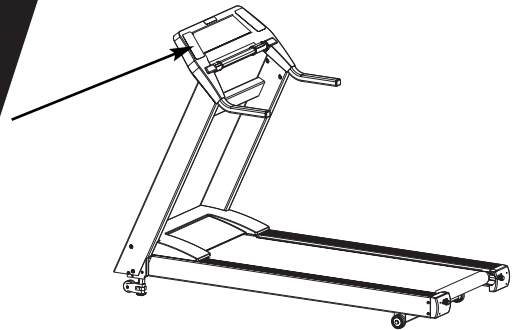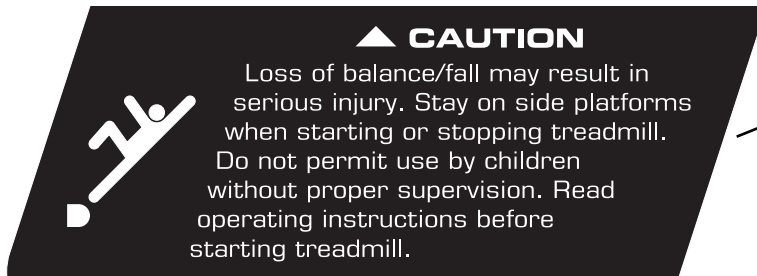

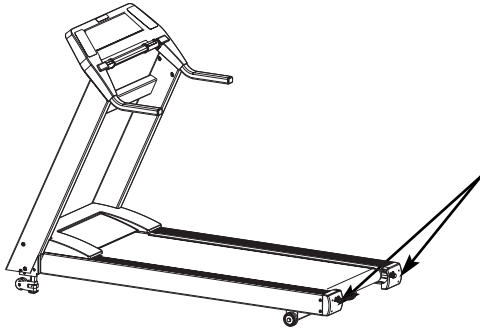

CAUTION
DO NOT USE
EXCESSIVE FORCE
TO TIGHTEN BELT

Emergency Stop

Press the **STOP** key once to bring the running belt to a stop.

Front Pages
About this Manual i
FCC Compliance Information i
Declaration of Conformity ii
Table of Contents. iii

1 Safety
Important Voltage Information 1-1
Grounding Instructions 1-1
Important Safety Instructions 1-2
Caution Labels. 1-4
Emergency Stop 1-5


Cybex 710T Treadmill Owner's Manual

2 - Technical Specifications

Specifications

Length:	82" (208 cm)
Width:	33" (84 cm)
Overall Height:	59" (150 cm)
Running Area:	20" x 60" (51 cm x 152 cm)
Weight of Product:	375 lbs. (159 kg)
Speed Range:	0.5 to 10.0 mph (0.8 to 16.1 kph) in 0.1 mph or 0.1 kph increments
Incline Range:	0 to 15% grade
Levels of Difficulty:	9 per program
Manual Mode:	Yes
Programs:	10 preset, 10 custom
Optional:	Full length handrails
Standard:	Contact Heart Rate, Polar
Connectivity:	CSAFE
Chassis Construction:	12 gauge steel tubing
Deck Material:	2 sided, wax impregnated wood
Power Requirement:	Grounded, dedicated circuit and 115 VAC, 60 Hz and 20 amps, or 230 VAC, 50 Hz, and 15 amps, or 208/220 VAC, 60 Hz and 15 amps
Motor:	2.5 hp, DC. continuous duty
Emergency Stop:	Press the stop button
Languages:	English, German, French, Spanish
Maximum User Weight:	400 lbs. (181 kg)
Warranty:	Labor 1 year; parts 2 years except as follows: structural frame, 10 years; deck and belt 1 year.

2 Technical Specifications
Specifications 2-1

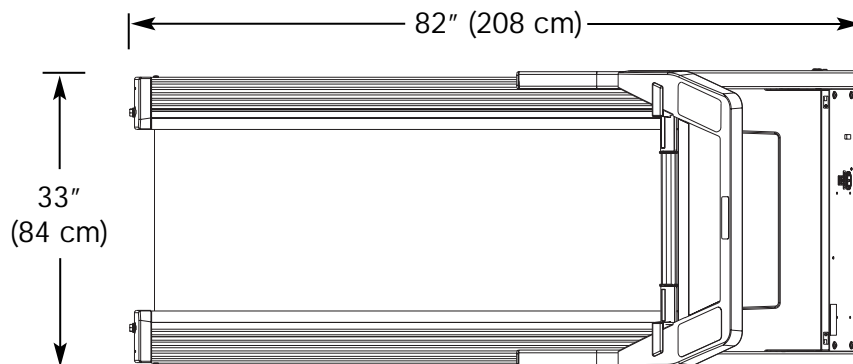

3 - Operation

Read and understand all instructions and warnings prior to using equipment. See all of the safety related information located in chapter 1.

NOTE: Maximum user weight is 400 lbs. (181 kg).

Quick Operation Guide

The following is a quick overview of the operation of the treadmill. For more information read *Detailed Operation Guide* in this chapter.

1. Mount the treadmill and place your feet on the two side rails located on each side of the running belt.
2. Press **START/ENTER** to enter the *Selection Mode*.
3. Press - to select *Manual Mode* or + to select *Program Mode*. If you selected *Manual Mode*, you will skip step 5 and 6 below.
4. Press - + to select your weight, then **START/ENTER**.
5. Press - + to scroll to the program of your choice, then **START/ENTER**.
6. If you select Pr1-Pr5, press - + to select level, then **START/ENTER**. If you select Pr7, press - + to select maximum speed, then **START/ENTER**. If you select Pr6 or Pr8-Pr11, press v^ to select maximum % grade, then **START/ENTER**.
7. The treadmill begins a countdown, "3...2...1," after which it accelerates the belt to the speed of the program that you selected.
8. Hold the handrails while you step onto the running belt and begin walking.
9. Press the - + keys to change the belt speed at any time. The right display will show the current speed.
10. Press the v^ arrows to change the incline at any time. The left display will show the current incline.
11. Press the **STOP** key at any time.

Detailed Operation Guide

Dormant Mode — *Dormant Mode* occurs when the treadmill is plugged in,

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide . . .	3-1
Stopping the Treadmill.	3-3
Control During Operation . . .	3-4
Data Readouts.	3-5
Selecting Programs	
& Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program . . .	3-8
P2 - Weight Loss Program . . .	3-10
P3 - Cardiovascular Program . .	3-12
P4 - Speed Challenge	
Program	3-14
P5 - Express Program	3-16
P6 - Hill Interval Program . . .	3-17
P7 - Speed Interval	
Program	3-18
P8 - Pike's Peak Program . . .	3-19
P9 - River Run Program	3-20
P10 - 5 Kilometer Program . . .	3-21
P11 - Demonstration	
Program	3-22
P101-P110 - Saved	
Program	3-22
Workout Tips	3-24

turned to the on (I) position and not in use. The control panel will light up and continuously scroll program information when the treadmill is *Dormant Mode*.

Activating the Treadmill — Follow the steps below:

1. Plug the treadmill power cord into a power outlet from a grounded, dedicated circuit, and one of the following: 115 VAC, 60 Hz and 20 amps, or 230 VAC, 50 Hz, and 15 amps, or 208/220 VAC, 60 Hz and 15 amps.
2. Locate the on/off (I/O) power switch on the front end of the treadmill (next to the power cord). Toggle it to the on (I) position to supply power to the internal treadmill components and illuminate the display panel.
3. Mount the treadmill from the rear and place your feet on the two 6" (15 cm) wide side rails located on each side of the running belt.

! CAUTION: *Always place your feet on the two 6" (15 cm) wide side rails when starting the treadmill.*

4. Press **START/ENTER** to enter the *Select Mode*.
5. Upon entering the *Select Mode*, the display lights to prompt the user to select the appropriate keys. First, the display scrolls "**MAXIMUM WORKOUT TIME 55 Min**". Next, the display shows "**SELECT MODE: MANUAL - PROGRAM +**," then "**MAN- PRG+**." After five seconds, if no key has been pressed, the treadmill will return to the *Dormant Mode*.
6. Press the - key to select *Manual Mode* or the + key to select *Program Mode*.
7. The display shows "**SET WEIGHT - or +**," then "**- + 160 LB**" (73 KG).

Use the - + keys to adjust the weight number displayed to reach your current weight, then press the **START/ENTER** key to accept your new weight reading. The 710T accepts weights from 40 to 400 lbs. (18 to 181 kg). After five seconds, if no key has been pressed, the treadmill will return to the *Dormant Mode*. The treadmill uses your weight, speed, and % grade to determine how many calories you burn during a workout.

NOTE: *For an accurate calorie count, you must correctly set your weight (including clothing).*

8. The display shows "**SELECT PROGRAM**," then "**Pr1- +**" and "**FITNESS TEST.**" Then it shows a profile of the program followed by "**PRESS ENTER TO SELECT, - + TO CHANGE.**" The display shows the same cycle of information for each consecutive program until it is interrupted. You may interrupt this cycle at any time by pressing the - + keys to scroll to the program of your choice.

If you select Pr1-Pr5, the display shows "**SELECT LEVEL**," then "**Lev 1 - +.**"

If you selected Pr7, the display shows "**SET MAX SPEED - +**," then "**SPEED - +.**"

If you select Pr6 or Pr8-Pr11, the display shows "**SET MAX GRADE v^**," then "**GRADE v^**". Adjust as appropriate and then press **START/ENTER**.

9. The display shows "**BEGIN PROGRAM**." The treadmill also counts down "3...2...1" and the running belt begins turning and starts the warm-up part of the program. After the warm-up, the belt speed and incline automatically change as prescribed by the program. The 710T sounds a tone to signal you before each change. Depending on which program and level you selected, the belt will begin accelerating and the incline will change to the corresponding speed and incline.

NOTE: *If the programs are not working they are probably turned off or the default program has changed. Read Programs On/Off Mode in Setting Operation Options in the Setup and Assembly chapter to learn how to turn programs on and off. See Memory Retention Mode in the Setup and Assembly chapter to learn how to change the default program.*

10. The left display will show the incline set point and the right display will show the speed set point. The center display will show the incline set point and the current speed will flash until the treadmill reaches these settings. When the beginning set points are reached the center display will switch to the program profile.
11. Hold the handrails while you step onto the running belt and begin walking.
12. Press the **STOP** key at any time to stop your workout. For more information read *Stopping the Treadmill* in this chapter.

NOTE: *If pressing STOP once does not pause your workout it is probably turned off. Read Pause On/Off Mode in Setting Operation Options in the Setup and Assembly chapter to learn how to change the pause default.*

Stopping the Treadmill

The **STOP** key may be pressed one, two or three times to accomplish the following:

Press **STOP** once to pause your workout. The belt will stop, and the elevation will return to 0%, but all workout settings and data will remain in memory for five minutes. The left and right display will continue to show the set points where you left off. The center display will cycle "**PAUSE**", the program profile and "**PRESS START TO CONTINUE**". Resume your workout within five minutes by pressing the **START/ENTER** key. The treadmill will return to the

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide . . .	3-1
Stopping the Treadmill.	3-3
Control During Operation . . .	3-4
Data Readouts.	3-5
Selecting Programs	
& Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program . . .	3-8
P2 - Weight Loss Program	3-10
P3 - Cardiovascular Program	3-12
P4 - Speed Challenge	
Program	3-14
P5 - Express Program	3-16
P6 - Hill Interval Program . . .	3-17
P7 - Speed Interval	
Program	3-18
P8 - Pike's Peak Program . . .	3-19
P9 - River Run Program	3-20
P10 - 5 Kilometer Program	3-21
P11 - Demonstration	
Program	3-22
P101-P110 - Saved	
Program	3-22
Workout Tips	3-24

same incline, speed and time where you left off. If no key has been pressed during the five minute pause, workout data will be cleared, the display will change to *Dormant Mode*.

Press the **STOP** key a second time to begin a workout review. The totals reached during your workout session will cycle and the five minute pause will end. After the workout review is finished the treadmill will automatically change to *Dormant Mode*.

Press the **STOP** key a third time to interrupt workout data from cycling and to change the display to *Dormant Mode*.

NOTE: A set-up feature, (see Diagnostic Test C17 in the Service chapter), allows you to reduce the pause time to ten seconds.

The function of the immobilization method: The purpose of immobilizing the treadmill is to prevent unauthorized use. This can be accomplished by removing the power cord from the outlet and from the treadmill.

The emergency dismount: Should you experience pain, feel faint, or need to stop your treadmill in an emergency situation, you should follow these steps:

1. Grip handrails for support.
2. Step onto the side rails.
3. Press the **STOP** button two times.

The function of the emergency stop: The red **STOP** button functions as the emergency stop. In an emergency situation, press the **STOP** button once and the treadmill will come to a stop. If you are ending your workout session, press **STOP** a second time, so that the next user will not resume at the last user's speed and elevation.

Control During Operation

Every key on the display is usable during operation. Any key may be pressed at any time to make adjustments in speed, elevation, level, or data readouts.

Changing Speed — Press the - + keys to change the speed in increments of 0.1 mph or 0.10 kph. Minimum to maximum speed is from 1.0 - 10 mph (1.6 - 16 kph).

Changing Incline — Press the ∇ \blacktriangledup arrows to change the elevation in increments of 1%. Maximum elevation is 15%. (Elevation is defined as the ratio of rise over run of the treadmill deck.)

Changing Level — During a programmed workout, press the **START/ENTER** key to display the current program and level status. Then press ∇ \blacktriangledup arrows to change the level. The level will change immediately and will continue to accumulate performance data without interruption. For information on determining which level is right for you, see *P1 — Fitness Test* in this chapter.

Changing Programs — To change programs, press the **STOP** key three times, then press the **START/ENTER** key and follow the prompts. **NOTE:** *You cannot switch from one program to another without ending your current workout and losing your accumulated data.*

Changing Workout Time — You can workout up to ninety-five minutes in *Manual Mode*. Or you can create your own program the length you wish. **NOTE:** *You cannot change the set time on programs.*

Changing Data Readouts — Press **SCAN/SAVE** once during a workout to review each individual set of data. Each time you press **SCAN/SAVE** the display cycles to the next set of data that you wish to monitor. To cycle continuously through available data during a program, press and hold down **SCAN/SAVE** for two to three seconds. The display shows each set of data for three seconds before switching to the next set. To stop cycling the display of data, press **SCAN/SAVE** once.

Data Readouts

As you exercise, the treadmill keeps track of your speed, % grade, calories burned per hour, the accumulated number of miles you cover, the amount of time you have spent (or have left) in a program, the total calories burned, your pace, and your heart rate. You can review this data any time during the workout.

Data displayed during a program: Press **SCAN/SAVE** once to review each set of data. Each time you press **SCAN/SAVE**, the center display cycles the data as follows:

1. Time remaining
2. Distance covered
3. Calories per hour
4. Calories burned
5. Pace (in minutes and seconds)
6. Beats per minute (you must use the heart rate grips for this to work)

To review accumulated data after a program: The display automatically cycles through your accumulated workout data two times at the end of a workout session. To review the data again (perhaps if you missed seeing a value), press **SCAN/SAVE** and the review sequence will repeat.

Meaning of terms:

%Grade — A 1% grade is not the same as a 1 degree incline. The % grade is the relationship of the measurement of rise over the measurement of run (also called slope). For example, a 1 foot (meter) rise in height over a length of 100 feet (meters) is a 1% grade. Expressed as a mathematical formula, the grade is

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide . .	3-1
Stopping the Treadmill. . . .	3-3
Control During Operation . .	3-4
Data Readouts.	3-5
Selecting Programs	
& Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program . .	3-8
P2 - Weight Loss Program	3-10
P3 - Cardiovascular Program	3-12
P4 - Speed Challenge	
Program	3-14
P5 - Express Program	3-16
P6 - Hill Interval Program .	3-17
P7 - Speed Interval	
Program	3-18
P8 - Pike's Peak Program .	3-19
P9 - River Run Program . .	3-20
P10 - 5 Kilometer Program	3-21
P11 - Demonstration	
Program	3-22
P101-P110 - Saved	
Program	3-22
Workout Tips	3-24

calculated as follows:

$$1 \text{ ft. (m)} / 100 \text{ ft. (m)} = 0.01 = 1\%$$

With respect to treadmills, the percent grade is roughly equal to the increase in height (rise) of the treadmill divided by the length (run) of the treadmill.

The degree of incline, or the angle of the treadmill, is calculated by a different mathematical formula: the arctangent of the grade (or slope).

Speed — The rate that you are traveling on the running belt.

Distance — The total accumulated distance, in miles or kilometers, during your workout.

Calories Per Hour — How many calories you are burning per hour. Your weight must be correctly set for this measurement to be accurate.

Calories — The total accumulated calories burned during your workout. Your weight must be correctly set for this measurement to be accurate.

Pace — At your current speed, how long it would take to cover a mile (or kilometer), displayed in minutes:seconds.

Heart Rate — Your current heart rate. Heart rate will appear automatically when a signal is introduced. Use either the handgrips for Contact Heart Rate or a Polar compatible heart rate transmitter.

Selecting Programs & Options

Every key on the display is usable during operation. Any key may be pressed at any time to make adjustments in speed, elevation, level, or data readouts. However, workout time and program choice can not be changed without ending your current workout.

Displaying Heart Rate

In order for the 710T to display your heart rate, you must either use a Polar compatible heart rate transmitter belt, or your treadmill must have the optional Contact Heart Rate.

Contact Heart Rate — Hold the handgrips on the console crossbar until a heart rate is displayed, typically less than thirty seconds. For best results, hold the handgrips lightly and ensure that your hands contact both the front and back sensors of each grip. Movement can cause interference on the contacts, so hold your hands as steady as possible.

NOTE: *When wearing a Polar compatible transmitter, the contact heart rate will dominate only when the grips are held.*

Polar Compatible Reception — To use this feature, a Polar compatible heart rate transmitter belt must be worn. To view heart rate continuously, press the **SCAN** key until “**BPM**” appears in the center display.

NOTE: Please note that Cybex does not recommend continuous holding of the handrails or the contact heart rate grips while running.

Use of Programs

The 710T is one of the most advanced personal fitness treadmills available. With the 710T, you choose from ten different programs, all of which have nine levels of difficulty, for a total choice of fifty different preprogrammed options. With this unique combination of programs, you can tailor your workout to achieve exactly the fitness goals you desire: weight loss, conditioning, endurance, or maintenance of overall health. The program choices are summarized as follows:

-	Manual Mode	You control speed, elevation, and time as you go.	
Pr1	Fitness Test	9 Levels	20 Minutes
Pr2	Weight Loss	9 Levels	45 Minutes
Pr3	Cardiovascular	9 Levels	30 Minutes
Pr4	Speed Challenge	9 Levels	30 Minutes
Pr5	Express	9 Levels	15 Minutes
Pr6	Hill Interval	Grade Controlled	30 Minutes
Pr7	Speed Interval	Speed Controlled	45 Minutes
Pr8	Pike's Peak	Grade Controlled	20 Minutes
Pr9	River Run	Grade Controlled	5 Miles
Pr10	5 Kilometer Run	Grade Controlled	5 Kilometers
Pr11	Demo	9 Levels	3.5 Minutes
Pr101-Pr110	Saved Program	You program speed, elevation, and time.	

NOTE: It is recommended that you begin your first workout with Program 1, the Fitness Test Program, to determine your level of fitness.

!WARNING: Obtain a medical exam before beginning any exercise program.

NOTE: The default program and user weight can be changed to the program of your choice. See Memory Retention Mode in the Setup and Assembly chapter.

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide . .	3-1
Stopping the Treadmill. . . .	3-3
Control During Operation . .	3-4
Data Readouts.	3-5
Selecting Programs	
& Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program . .	3-8
P2 - Weight Loss Program	3-10
P3 - Cardiovascular Program	3-12
P4 - Speed Challenge	
Program	3-14
P5 - Express Program. . . .	3-16
P6 - Hill Interval Program .	3-17
P7 - Speed Interval	
Program	3-18
P8 - Pike's Peak Program .	3-19
P9 - River Run Program . .	3-20
P10 - 5 Kilometer Program	3-21
P11 - Demonstration	
Program	3-22
P101-P110 - Saved	
Program	3-22
Workout Tips	3-24

Manual Mode

Manual Mode is not a preprogrammed workout. Instead, it allows you to choose settings as you workout. You may choose your settings according to how you feel, or your endurance level. Since you remain in control, *Manual Mode* may be the best choice for beginners or for those who have not worked out in a long time.

To increase or decrease the speed while in *Manual Mode* use the - + keys. To increase or decrease the incline while in *Manual Mode* use the ∇ \wedge arrows.

When you workout in *Manual Mode*, be sure to include a three to five minute warm-up and cool-down period. You can warm-up by setting a slow speed for walking/jogging on the treadmill at zero incline and then gradually increase the speed to the target for your workout. Reverse this process for your cool-down period, slowing down the speed gradually and returning the incline to zero.

P1 — Fitness Test Program

The P1 Fitness Test Program is a twenty-minute walking workout designed to test your aerobic walking capacity. It is the guide by which you determine which program "L" level is best suited to your current performance capability and physical condition.

If you successfully complete the twenty-minute test at a certain fitness level (L1 to L9), you are capable of training in the other programs (Pr2 to Pr5) at that same "L" level number.

In addition to providing the key to your current "L" level status, the P1 program can be used at any time as an excellent cardiovascular conditioning workout. P1 provides a relatively long and gradual warm-up period of increasing speed and incline and a five minute cool-down period at the end. The middle portion of the program brings you to a fairly high percentage of maximum heart rate at the peak workload point in the program (minute twelve to minute 15).

Fitness Test Program Profile — The P1 program consists of five three-minute segments (fifteen minutes total) and one five-minute cool-down segment. At the end of each three-minute segment, both the SPEED and the GRADE of the treadmill increase.

When the fifth segment begins (twelve minutes into the workout), you are at maximum workload point in the program. The last five-minute segment (beginning at minute number 16) serves as a cool-down period as the treadmill slows down and returns to 0% grade.

Choose a level that realistically reflects your fitness level and begin your fitness test. Do NOT begin at L9 and work your way down. If you have been relatively inactive for some time, start at level L1 to L3.

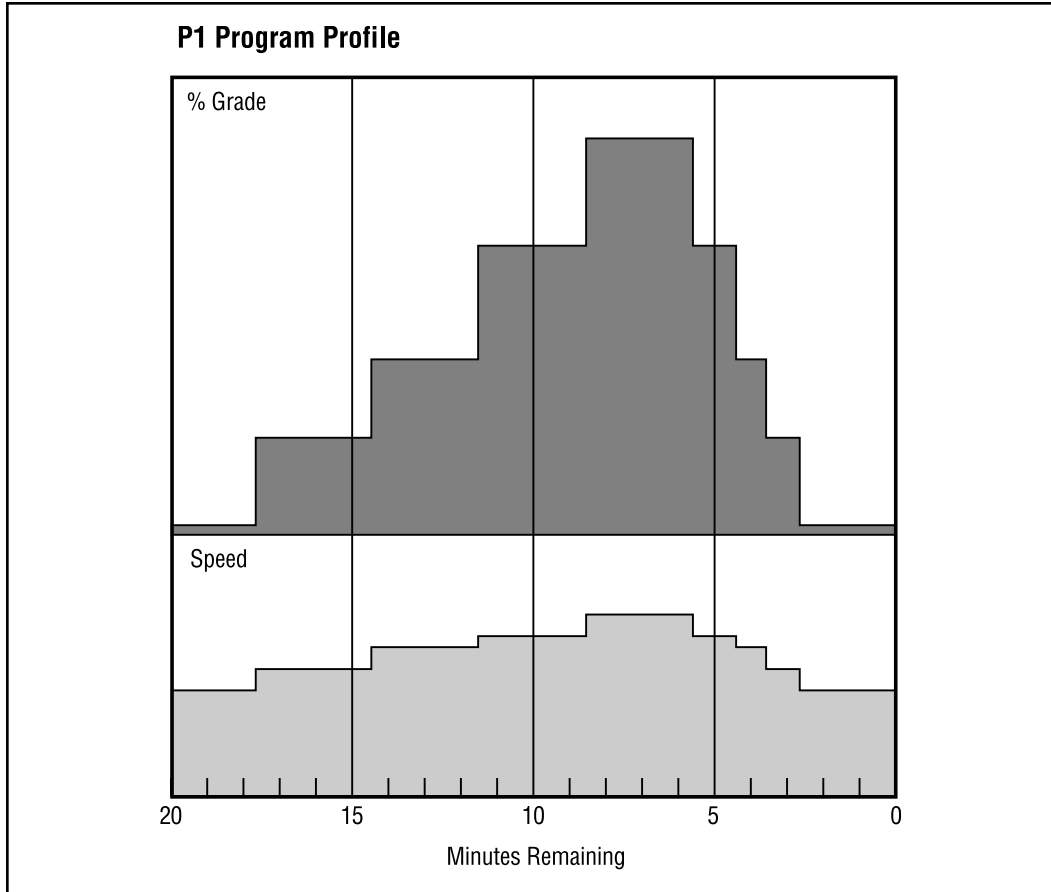


Figure 1

Program Results — To pass your P1 Fitness Test successfully:

To pass your P5 Fitness Test successfully:

You must complete the entire program without any major pains or discomfort.

You must feel that you could carry on a conversation with someone standing nearby during the entire twenty-minute program.

You must feel that you could have continued the fifth interval (the most difficult interval) even if it was increased from its three-minute time period to a ten-minute time period.

Your heart rate did not exceed 85% of its maximum capability, immediately after the maximum workload interval (fifth segment) or exactly fifteen minutes into the program.

If you are unable to complete the P1 workout at your current "L" level, drop back one "L" level and try again in a day or so. If you are able to complete the P1 workout with no strain at all, increase your "L" level one number and repeat the fitness test in 24 hours. If you are just able to complete the P1 workout and realize that the next highest "L" level is out of your reach, you have found your true "L" fitness level.

3 Operation

Quick Operation Guide 3-1
 Detailed Operation Guide . . 3-1
 Stopping the Treadmill. . . . 3-3
 Control During Operation . . 3-4
 Data Readouts. 3-5
 Selecting Programs
 & Options 3-6
 Displaying Heart Rate 3-6
 Use of Programs 3-7
 Manual Mode 3-8
 P1 - Fitness Test Program. . 3-8
 P2 - Weight Loss Program 3-10
 P3 - Cardiovascular Program 3-12
 P4 - Speed Challenge
 Program 3-14
 P5 - Express Program. . . . 3-16
 P6 - Hill Interval Program . 3-17
 P7 - Speed Interval
 Program 3-18
 P8 - Pike's Peak Program . 3-19
 P9 - River Run Program . . 3-20
 P10 - 5 Kilometer Program 3-21
 P11 - Demonstration
 Program 3-22
 P101-P110 - Saved
 Program 3-22
 Workout Tips 3-24

The 710T is designed to help you set goals and measure your progress. The key is to evaluate your fitness level "L", and to re-evaluate it periodically at different stages of your training. Most importantly, the fitness test tells you precisely which "L" level is commensurate with your ability. As long as you know your "L" level, you'll be able to fine-tune your workouts for optimum results.

P2 — Weight Loss Program

The P2 Weight Loss Program is a forty-five-minute walking workout designed specifically to help you lose weight. In this program, weight loss is based on the length of time you exercise. Exercising at a lower intensity allows you to handle a longer duration and distance workout and thus burn more calories. With other lifestyle factors remaining the same (such as diet), simply adding the P2 workout to your schedule should result in weight loss because of the increase in calories burned.

You could alternate this program with any of the other 710T programs to combine weight reduction and fitness training.

Weight Loss Program Profile — The P2 program consists of an initial six-minute warm-up of relatively mild increases in speed and incline. This is followed by five seven-minute segments (thirty-five minutes total), during which speed remains constant and the % grade changes to simulate hill profiles.

At the end of each five-minute segment, the % grade automatically increases to the maximum % grade for that "L" level. For example, if the current grade is 6% and the maximum is 8%, the 710T increases to 8% grade for two minutes and then return to 6% grade for another five-minute segment. The speed remains constant during the entire period. This is equivalent to walking at a constant speed on a series of five rolling hills. It is these hills that help you burn extra calories and more fat by providing a "metabolic spike" as your workload increases during the periods of maximum incline.

A four-minute segment at the end of the program serves as a cool-down period as the treadmill slows down and the incline returns to 0% grade.

Choose a level that reflects your fitness level as determined in the P1 Fitness Test program.

Program Results — The P2 Weight Loss Program is designed to keep your metabolism high for the primary portion of the forty-five-minute workout. For 77% of the time (thirty-five out of the forty-five minutes), you are working out at a level averaging 85% of your maximum P1 performance workload.

If you are just starting your fitness walking program, this workout may be too much for you. In that case, you can cut your P2 workouts short at any point until you feel comfortable

completing the full forty-five-minute workout. Don't forget to allow yourself a three to five-minute cool-down period if you leave the program before it is complete.

Three to four P2 workouts per week, in conjunction with other 710T programs performed on alternate days, will ensure that you remain active on a daily basis. This is the ideal way to schedule your weight loss program for maximum results.

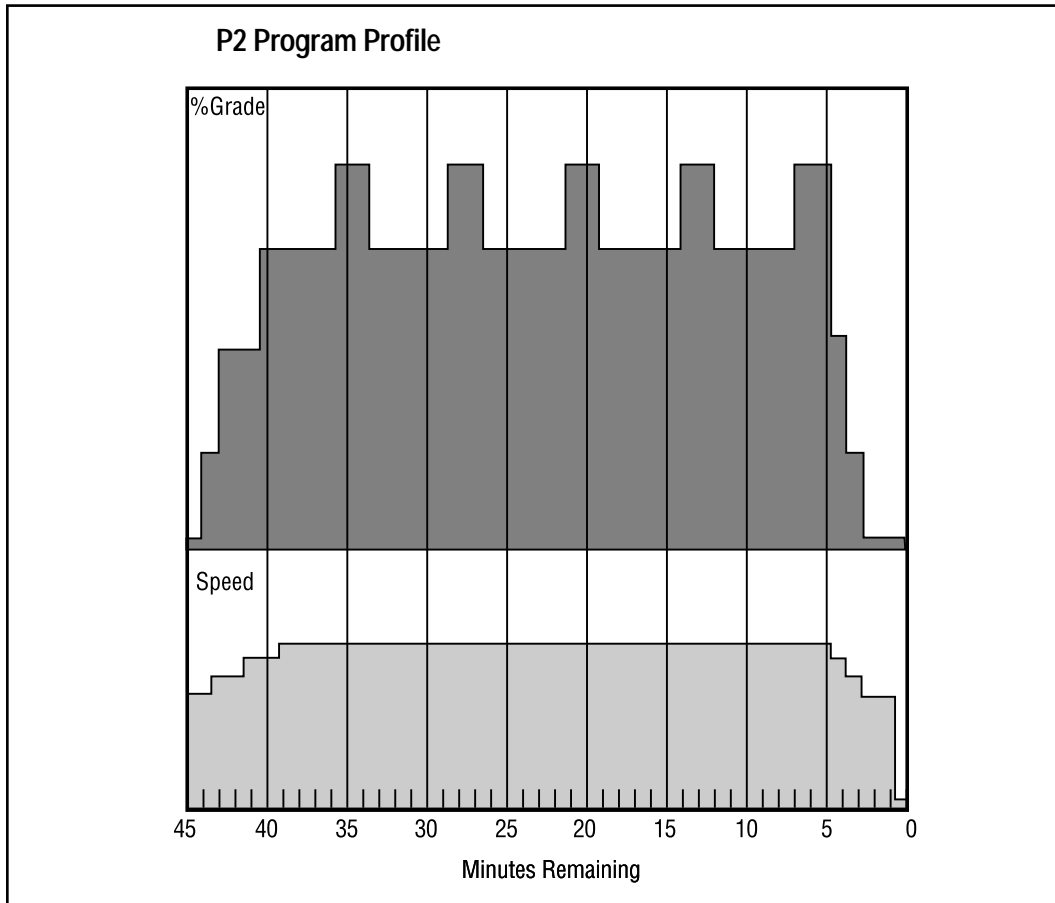


Figure 2

3 Operation

- Quick Operation Guide 3-1
- Detailed Operation Guide . . 3-1
- Stopping the Treadmill. . . . 3-3
- Control During Operation . . 3-4
- Data Readouts. 3-5
- Selecting Programs
- & Options 3-6
- Displaying Heart Rate 3-6
- Use of Programs 3-7
- Manual Mode 3-8
- P1 - Fitness Test Program . . 3-8
- P2 - Weight Loss Program 3-10
- P3 - Cardiovascular Program 3-12
- P4 - Speed Challenge
- Program 3-14
- P5 - Express Program 3-16
- P6 - Hill Interval Program . . 3-17
- P7 - Speed Interval
- Program 3-18
- P8 - Pike's Peak Program . . 3-19
- P9 - River Run Program . . 3-20
- P10 - 5 Kilometer Program 3-21
- P11 - Demonstration
- Program 3-22
- P101-P110 - Saved
- Program 3-22
- Workout Tips 3-24

P3 — Cardiovascular Program

The P3 Cardiovascular Program is a thirty-minute workout which uses high-intensity, aerobic exercise to strengthen the heart muscle, stressing the heart at about 70% to 85% of its maximum pumping rate.

Program Profile — The P3 program consists of an initial four-minute warm-up segment of relatively mild increases in speed and incline. This is followed by a twelve-minute segment of automatic increases in speed and % grade. During this time the program reaches its maximum intensity.

The next ten-minute segment is “all downhill” as the speed begins to slow and the % grade gradually decreases.

A four-minute segment at the end of the program serves as the cool-down period. The treadmill slows down and the incline returns to 0% grade.

Choose a level that reflects your fitness level as determined in the P1 Fitness Test program.

Program Results — The P3 Cardiovascular Program is designed to keep your metabolism high for the primary portion of the thirty-minute workout. For 71% of the time (twenty-two out of the thirty minutes) you are working at an intensity level averaging 93% of your maximum P1 performance workload. If you are just starting your fitness walking program, this workout may be too much for you. In that case, you can cut your P3 workouts short at any point until you feel comfortable completing the full thirty-minute workout. Don't forget to allow yourself a three to five-minute cool-down period if you leave the program before it is complete.

Three P3 workouts per week with 48 hours of recovery time (i.e., Tuesday, Thursday, Saturday, etc.) are sufficient to maintain good cardiovascular conditioning.

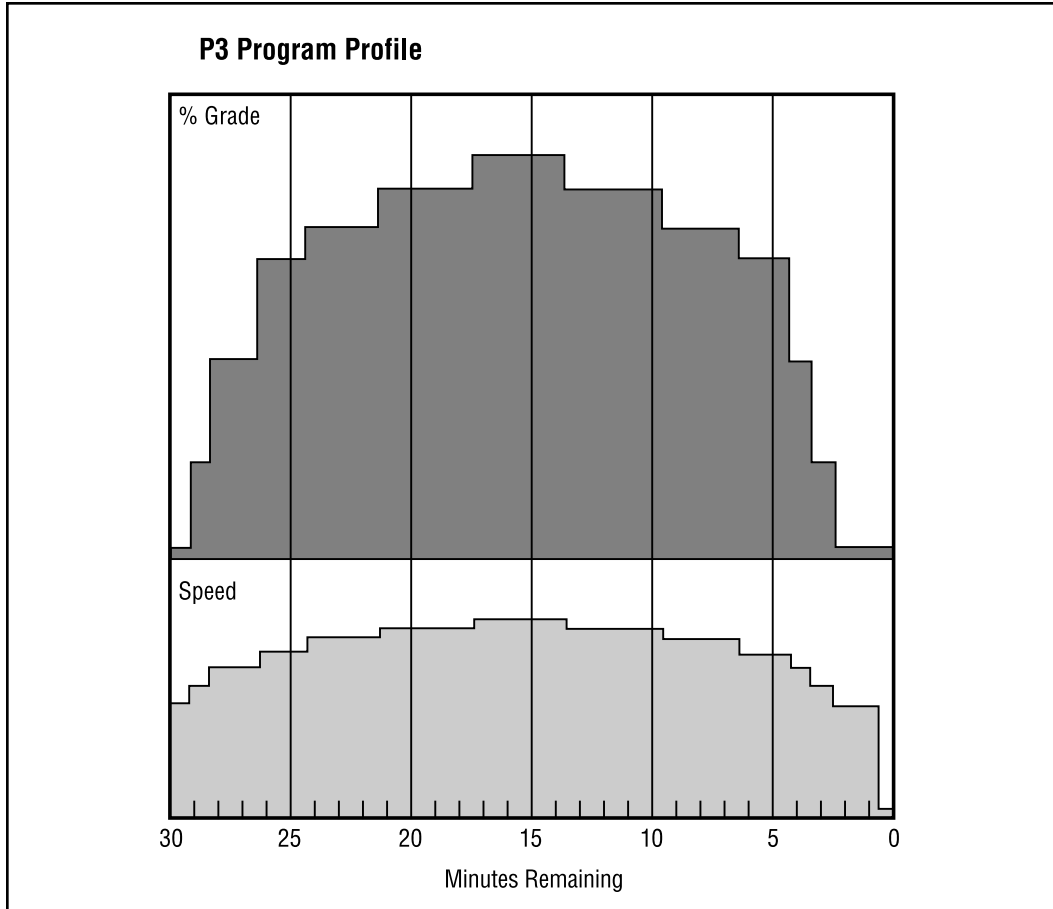


Figure 3

3 Operation

- Quick Operation Guide 3-1
- Detailed Operation Guide . . 3-1
- Stopping the Treadmill. . . . 3-3
- Control During Operation . . 3-4
- Data Readouts. 3-5
- Selecting Programs & Options 3-6
- Displaying Heart Rate 3-6
- Use of Programs 3-7
- Manual Mode 3-8
- P1 - Fitness Test Program . . 3-8
- P2 - Weight Loss Program . . 3-10
- P3 - Cardiovascular Program . 3-12
- P4 - Speed Challenge Program 3-14
- P5 - Express Program. 3-16
- P6 - Hill Interval Program . . 3-17
- P7 - Speed Interval Program 3-18
- P8 - Pike's Peak Program . . 3-19
- P9 - River Run Program . . . 3-20
- P10 - 5 Kilometer Program . 3-21
- P11 - Demonstration Program 3-22
- P101-P110 - Saved Program 3-22
- Workout Tips 3-24

P4 — Speed Challenge Program

The P4 Speed Challenge Program is a thirty-minute, high-intensity walking workout designed to improve your cardiorespiratory system and increase your muscle workload capability. P4 uses changes in intensity to exercise your body at near maximum capacity for short time intervals. If you are training for road races or other high-energy sports, the P4 program will help you shave minutes off your race times.

Program Profile — The P4 program consists of an initial eight-minute warm-up of relatively mild increases and decreases in both speed and incline. This is followed by a series of four five-minute super-intervals consisting of one steady incline and a substantial increase in speed.

Each of these four intervals lasts for five minutes: two minutes at the high speed followed by three minutes at a 30% speed slowdown to allow you to “catch your breath” before increasing the speed once again.

At the time of the speed increase, your walking speed increases to 12% faster than your P1 peak speed at your maximum P1 grade. At the end of the four super-intervals, a two-minute cool-down period slows the treadmill and returns to 0% grade.

Choose a level that reflects your fitness level as determined in the P1 Fitness Test program.

Program Results — The P4 Speed Challenge program is one of the most challenging workouts offered by your 710T. It is designed to push you to the limit to improve your walking speed.

If you are just starting your fitness walking program, this workout may be too much for you. In that case, you can cut your P4 workouts short at any point until you feel comfortable completing the full thirty-minute workout. Don't forget to allow yourself a three to five-minute cool-down period if you leave the program before it is complete.

Even one P4 workout a week strengthens the cardiorespiratory system, enabling your muscles to accept higher workloads and thus increase your normal walking speed.

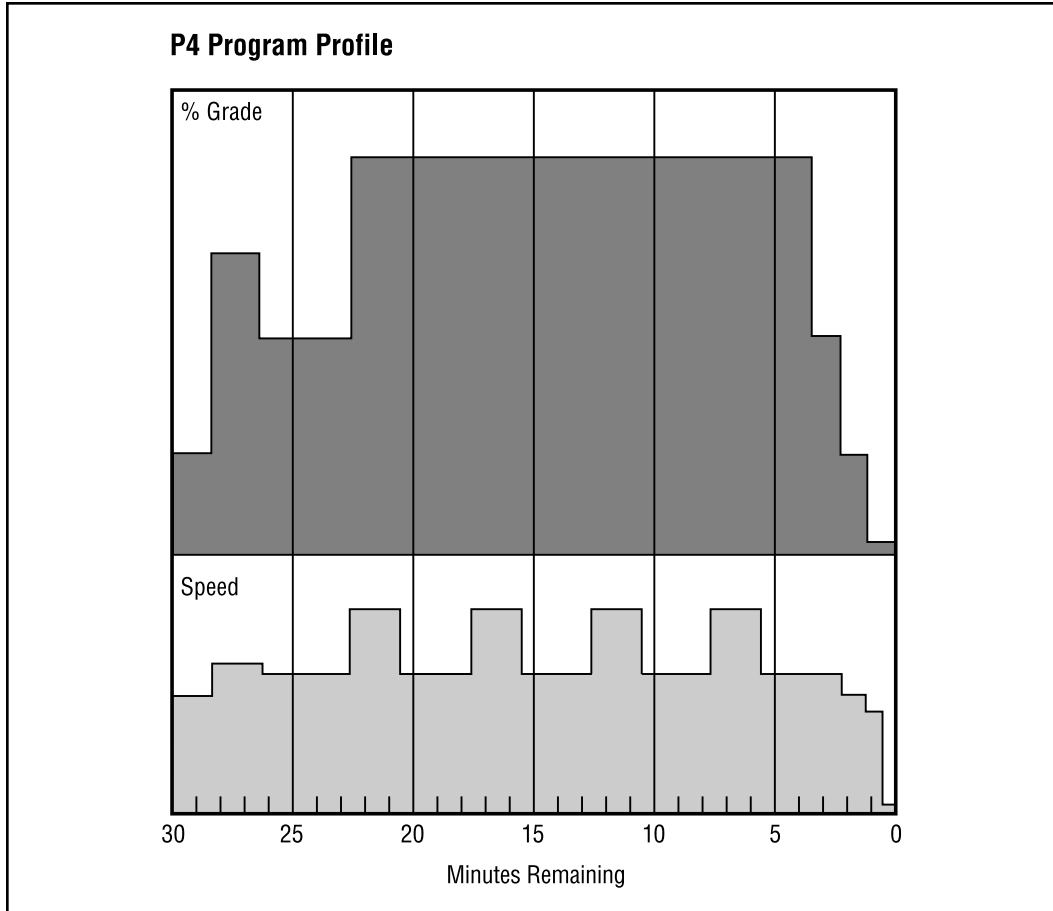


Figure 4

3 Operation

- Quick Operation Guide 3-1
- Detailed Operation Guide . . 3-1
- Stopping the Treadmill. . . . 3-3
- Control During Operation . . 3-4
- Data Readouts. 3-5
- Selecting Programs & Options 3-6
- Displaying Heart Rate 3-6
- Use of Programs 3-7
- Manual Mode 3-8
- P1 - Fitness Test Program . . 3-8
- P2 - Weight Loss Program . . 3-10
- P3 - Cardiovascular Program . 3-12
- P4 - Speed Challenge Program 3-14
- P5 - Express Program 3-16
- P6 - Hill Interval Program . . 3-17
- P7 - Speed Interval Program 3-18
- P8 - Pike's Peak Program . . 3-19
- P9 - River Run Program . . . 3-20
- P10 - 5 Kilometer Program . . 3-21
- P11 - Demonstration Program 3-22
- P101-P110 - Saved Program 3-22
- Workout Tips 3-24

P5 — Express Program

The P5 Express Program is a short, fifteen-minute walking workout designed to provide a milder form of exercise than the other 710T programs. When you are recovering from an illness and do not want to overtax your system, the P5 program is ideal. If you are short of time but still want to participate in an exercise program that provides a warm-up and cool-down period, the P5 program is perfect.

Express Program Profile — The P5 program consists of relatively mild incremental increases in speed and incline. Automatic increases in both speed and incline occur throughout the first half of the program. After you reach the peak speed and % grade, the 710T begins to slow your speed and decrease your % grade gradually. A three-minute segment at the end of the program serves as a cool-down period. The treadmill speed slows and the incline returns to a minimal % grade.

Choose a level that reflects your fitness level as determined by the P1 Fitness Test program.

Program Results — The P5 Express Program is designed to keep your metabolism high for the entire fifteen-minute workout. For fifteen straight minutes you are working out at a minimum of 85% of your maximum P1 performance workload.

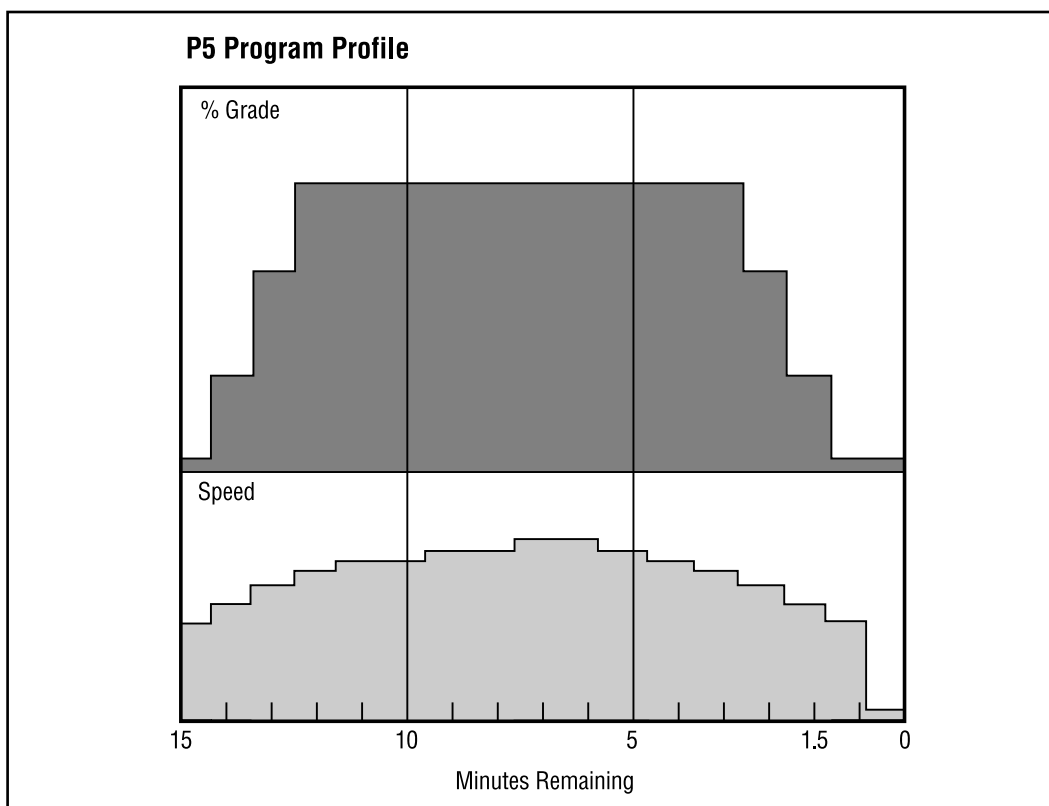


Figure 6

P6 — Hill Interval Program

The P6 Hill Interval Program simulates an actual thirty-minute walk or run. It is a vigorous hill climb that is designed to build physical endurance and strength.

Hill Interval Program Profile — The P6 program is designed with hills to simulate actual road conditions. The maximum height of the hills is determined by the maximum % grade that you choose before you start the program (0% to 15% grade).

You vary the speed (pace) throughout the workout. Choose a speed and % grade that reflects your fitness level.

Program Results — The P6 Hill Program is designed to keep your metabolism high for the entire workout. The intensity level of this workout depends on the pace (speed) you set and the maximum incline you choose.

You can measure your fitness level by the amount of mileage you cover in your thirty-minute workout. The P6 program gives you the freedom to adjust the pace depending on the severity of the hill.

Speed: Controlled by user

% Grade: Controlled by program (based on a user-preselected maximum)

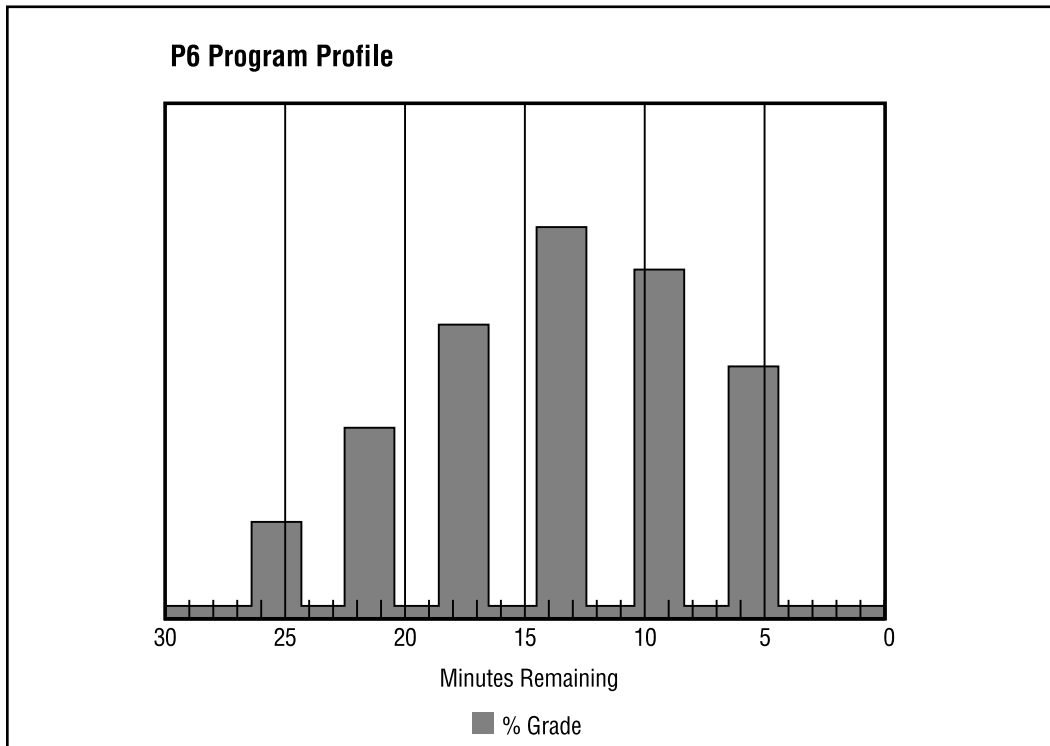


Figure 5

3 Operation

- Quick Operation Guide 3-1
- Detailed Operation Guide . . 3-1
- Stopping the Treadmill. . . . 3-3
- Control During Operation . . 3-4
- Data Readouts. 3-5
- Selecting Programs & Options 3-6
- Displaying Heart Rate 3-6
- Use of Programs 3-7
- Manual Mode 3-8
- P1 - Fitness Test Program . . 3-8
- P2 - Weight Loss Program 3-10
- P3 - Cardiovascular Program 3-12
- P4 - Speed Challenge Program 3-14
- P5 - Express Program 3-16
- P6 - Hill Interval Program . . 3-17
- P7 - Speed Interval Program 3-18
- P8 - Pike's Peak Program . . 3-19
- P9 - River Run Program . . 3-20
- P10 - 5 Kilometer Program 3-21
- P11 - Demonstration Program 3-22
- P101-P110 - Saved Program 3-22
- Workout Tips 3-24

P7 — Speed Interval Program

The P7 Speed Interval Program is a forty-five-minute workout designed to help you achieve cardiovascular conditioning while also burning a substantial number of calories. P7 uses a technique called interval training to strengthen your heart and the rest of your cardiovascular system. With interval training, you exercise at a high intensity for short intervals of time so that you don't over-tax your cardiovascular system. By strengthening your heart, interval training enables you to build a quicker recovery rate, or the amount of time it takes your heart to recover from a period of exercise.

Speed Interval Program Profile — You set the maximum desired speed and the treadmill scales speed changes based on that maximum. The program begins with a five-minute warm-up followed by a four-minute high-speed interval. Then the P7 program alternates speeds every minute from a high to a low. This creates the interval effect which helps you achieve cardiovascular conditioning and burn calories at the same time. Each of the speed increase and decrease intervals lasts for only one minute; one minute at the higher speed followed by one minute at the lower speed before increasing the speed once again. The P7 program operates at a 0% grade. If you wish to increase the intensity of your workout, but don't feel ready to increase your speed, you can increase the incline and remain at your current speed.

Program Results — The P7 Program is an ideal way to improve your heart's capacity and reduce your weight at the same time.

% Grade: Controlled by user

Speed: Controlled by program (based on a user-preselected maximum)

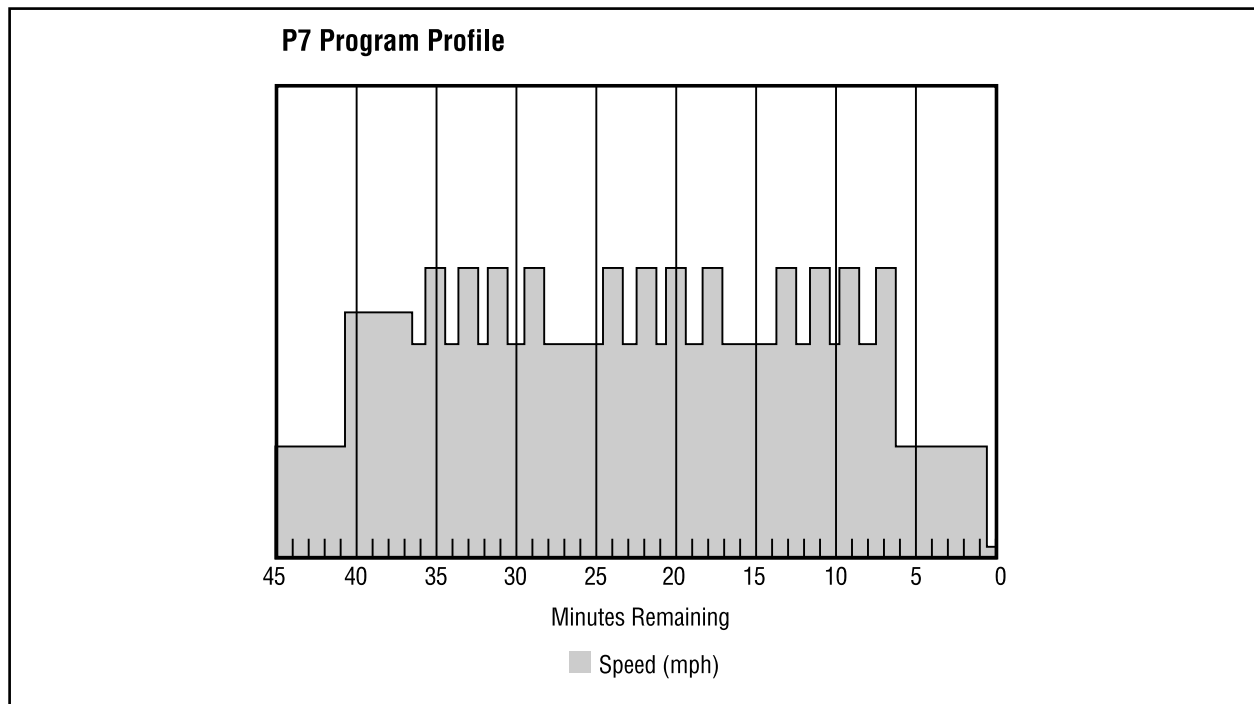


Figure 8

P8 — Pike's Peak Program

The P8 Pike's Peak Program is a twenty-minute workout designed to simulate a short, but steep, uphill climb. The height of the climb is determined by the maximum % grade you choose before you start the program (0% to 15%). You control how fast you climb. The treadmill scales the % grade changes in the rest of the profile based on your maximum setting.

Pike's Peak Program Profile — P8 consists of a four-minute warm-up period and then has steady increases in % grade over four three-minute segments. The last segment uses the maximum % grade you selected. After you reach the "top of the mountain," the program begins a four-minute cool-down period with gradual decreases in % grade.

Program Results — The P8 Pike's Peak Program is designed to give you a quick, but challenging, cardiovascular workout. You could use this program if you don't have a lot of free time for exercise or as a break on days between a longer program when you want a short, but strenuous workout.

Speed: Controlled by user

% Grade: Controlled by program (based on a user-preselected maximum)

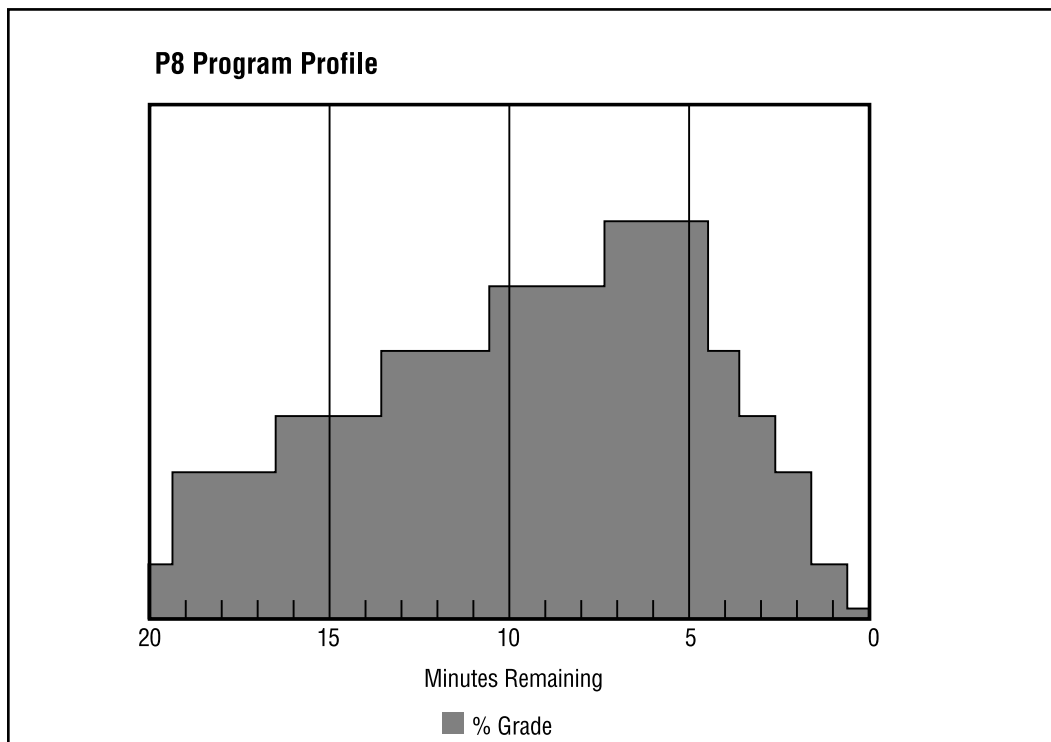


Figure 7

3 Operation

- Quick Operation Guide 3-1
- Detailed Operation Guide . . 3-1
- Stopping the Treadmill. . . . 3-3
- Control During Operation . . 3-4
- Data Readouts. 3-5
- Selecting Programs
 - & Options 3-6
- Displaying Heart Rate 3-6
- Use of Programs 3-7
- Manual Mode 3-8
- P1 - Fitness Test Program . . 3-8
- P2 - Weight Loss Program . 3-10
- P3 - Cardiovascular Program 3-12
- P4 - Speed Challenge
 - Program 3-14
- P5 - Express Program 3-16
- P6 - Hill Interval Program . 3-17
- P7 - Speed Interval
 - Program 3-18
- P8 - Pike's Peak Program . 3-19
- P9 - River Run Program . . 3-20
- P10 - 5 Kilometer Program 3-21
- P11 - Demonstration
 - Program 3-22
- P101-P110 - Saved
 - Program 3-22
- Workout Tips 3-24

P9 — River Run Program

The P9 River Run Program is a 5-mile (8 kilometer) running workout that simulates a series of four hills, three of which increase in intensity to a peak and one that occurs after the peak, for an extra challenge at the end of the workout. You determine the height of the peaks by the maximum % grade you choose before you start the program (0% to 15%). You control your speed (running pace) as you run. The treadmill scales the % grade changes in the rest of the profile based on your maximum setting.

River Run Program Profile — The P9 program is designed with % grade changes to simulate actual hill conditions. You also set your own speed (pace). Running at an average 8 minutes per mile (five minutes per kilometer), you will finish the five-mile (8 kilometer) workout in about forty minutes. As you progress through the program, the timer counts up and the distance indication counts down.

Program Results — The P9 River Run Program is designed to keep your metabolism high for the entire workout. The intensity level of this workout totally depends on the running pace (speed) and the % grade you set.

Speed: Controlled by user

% Grade: Controlled by program (based on a user-preselected maximum)

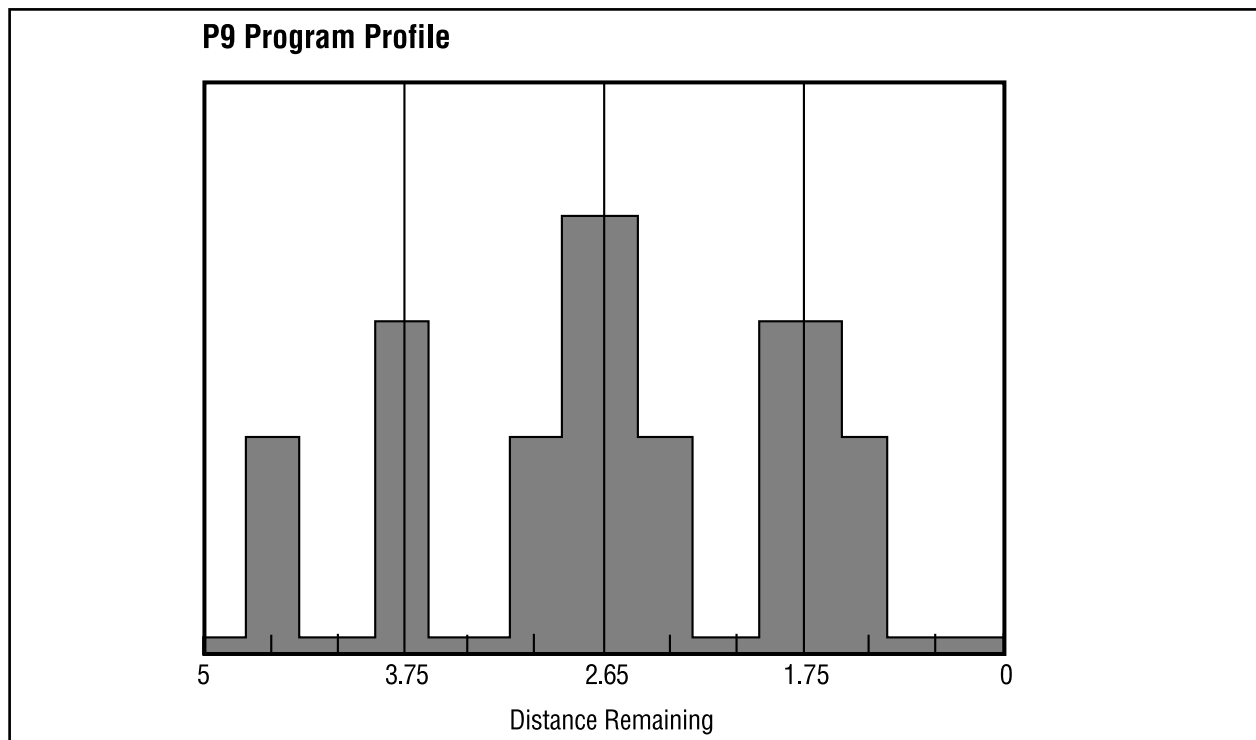


Figure 9

P10 — 5 Kilometer Program

The P10 5 Kilometer Program is a running workout designed to simulate a five kilometer run.

5 Kilometer Program Profile — The P10 program is designed with changes in incline to simulate actual hill conditions. The maximum height of the hills is determined by the maximum % grade you choose before you start the program (0% to 15%). The treadmill scales the % grade changes in the rest of the profile based on your maximum setting. You also control your own speed (pace).

Running at an average eight minutes per mile (five minutes per kilometer), you will finish the five kilometer workout in about twenty-five minutes. As you progress through the program, the timer counts up and the distance indication counts down.

Program Results — The P10 5 Kilometer Run Program is designed to keep your metabolism high for the entire workout. The intensity level of this workout totally depends on the running pace (speed) and the % grade you set.

Speed: Controlled by user

% Grade: Controlled by program (based on a user-preselected maximum)

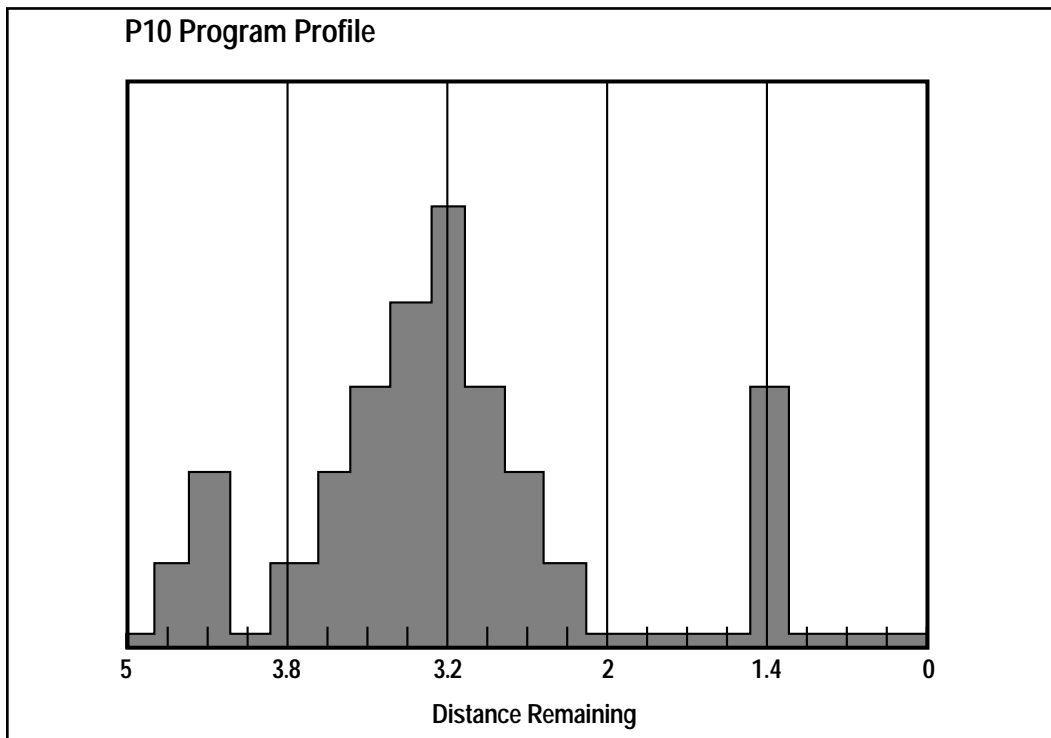


Figure 10

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide . .	3-1
Stopping the Treadmill. . . .	3-3
Control During Operation . .	3-4
Data Readouts.	3-5
Selecting Programs	
& Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program . .	3-8
P2 - Weight Loss Program	3-10
P3 - Cardiovascular Program	3-12
P4 - Speed Challenge	
Program	3-14
P5 - Express Program	3-16
P6 - Hill Interval Program .	3-17
P7 - Speed Interval	
Program	3-18
P8 - Pike's Peak Program .	3-19
P9 - River Run Program . .	3-20
P10 - 5 Kilometer Program	3-21
P11 - Demonstration	
Program	3-22
P101-P110 - Saved	
Program	3-22
Workout Tips	3-24

P11 — Demonstration Program

The P11 program is a 3.5 minute demonstration program with seven levels of intensity designed to show the capabilities of the treadmill. This program changes speed and/or grade every fifteen seconds.

P101-P110 — Saved Program

In addition to the four programmed workouts included with the 710T, you can also create your own workout by manually changing the speed and/or incline as you exercise. You increase or decrease the speed and incline settings, using **SPEED** - + keys and **INCLINE** ∇ \blacktriangle arrows. You can even create a workout to mimic a route you normally run or walk outside.

When you design your own program, be sure to include a three to five minute warm-up and cool-down period. You can warm-up by setting a slow speed for walking/jogging on the treadmill at zero incline and then gradually increase the speed to the target for your workout. Reverse this process for your cool-down period, slowing down the speed gradually and returning the incline to zero.

Creating A Personal Workout

If you make speed or incline modifications during a program, you may want to save your changes so that you can repeat that same workout again. Or you may want to save a *Manual Mode* workout session. You can save up to ten personal programs (Pr101 to Pr110) depending on their size and complexity. To create your personal workout:

1. **Select and complete any program.**
 - A. Choose *Manual Mode* to create your own workout or any program to modify a programmed workout.
 - B. Include a three-to-five minute warm-up period.
 - C. Complete the entire program, altering it as you go by changing the level, speed, and/or incline.
 - D. Include a three-to-five minute cool-down period.
2. **Save your personal workout.**
 - A. Press **STOP** twice at the end of your program.
 - B. Press **SCAN/SAVE**.
 - C. The first time you save a program, the display shows "**SAVE AS Pr101?**," then "**Pr101** - +." If a program already exists in that position, the display reads, "**REPLACE**

EXISTING?," then **"NO - YES +."** If you wish to save the new program in that position, press +.

If the display shows **"REPLACE EXISTING?"** for all locations, you have already saved the maximum number of personal programs. Press + for **YES** (to replace an existing personal program) or - for **NO** (do not save your program).

D. The display shows **"Saved as Prxxx"** where xxx is the number you selected.

NOTE: *It may be necessary to replace more than one program if the program you are attempting to save is a program with many speed and/or grade changes.*

Workout Tips

Monitoring Your Heart Rate

Exercise doesn't have to be painful to be effective. On the contrary, research has shown that simply by raising your heart rate and maintaining it within specific training zones, for specific lengths of time, you can actually maximize the benefits of your workout program.

The fact is, within these training zones is where your body burns stored fat with the greatest efficiency. Based upon your age and weight, these training zones reflect activity levels that range from 60 to 90% of your maximum heart rate. Which is why monitoring your heartbeat is so important if you want maximum results from your workouts.

Experts generally agree that the intensity of the workout for the average person should be between 60% and 85% of their maximum, although a sedentary person might start out even lower depending on age, health and how active he or she has previously been.

Follow the steps below to determine your target heart rate:

1. Take your heart rate:

- A.** Keep moving on the treadmill.
- B.** Place the first two fingers of your right hand on your neck, just under your jaw and to the right of your Adam's apple.
- C.** Press in slightly until you feel a pulse.

3 Operation

Quick Operation Guide	3-1
Detailed Operation Guide . .	3-1
Stopping the Treadmill.	3-3
Control During Operation . .	3-4
Data Readouts.	3-5
Selecting Programs	
& Options	3-6
Displaying Heart Rate	3-6
Use of Programs	3-7
Manual Mode	3-8
P1 - Fitness Test Program . .	3-8
P2 - Weight Loss Program	3-10
P3 - Cardiovascular Program	3-12
P4 - Speed Challenge	
Program	3-14
P5 - Express Program	3-16
P6 - Hill Interval Program . .	3-17
P7 - Speed Interval	
Program	3-18
P8 - Pike's Peak Program . .	3-19
P9 - River Run Program . . .	3-20
P10 - 5 Kilometer Program	3-21
P11 - Demonstration	
Program	3-22
P101-P110 - Saved	
Program	3-22
Workout Tips	3-24

- D. Count the number of beats you feel for 15 seconds.
- E. Multiply the number of beats by 4 to get your heart rate per minute.

2. Determine your target heart rate .

A. Use the chart below to determine your target heart rate:

Approx. Age	Maximum Heart Rate	85% Heart Rate (Should be less than)
20	200	170 beats per minute
30	190	162 beats per minute
40	180	153 beats per minute
50	170	145 beats per minute
60	160	136 beats per minute
70	150	128 beats per minute

Visit our website at www.ecybex.com/education to use the body mass calculator, calorie calculator, and to get performance training tips.

4 - Preventive Maintenance

Regular Maintenance Activities

Preventive maintenance activities must be performed to maintain normal operation of your treadmill. Keeping a log sheet of all maintenance actions will assist you in staying current with all preventive maintenance activities. See Log Sheet in this chapter.

Cleaning Your Treadmill

When cleaning your treadmill spray a mild cleaning agent, such as a water and dishsoap solution, on a clean cloth first and then wipe the treadmill with the damp cloth.

! CAUTION: Do not spray cleaning solution directly on the treadmill. Direct spraying could cause damage to the electronics and may void the warranty.

! WARNING: To prevent electrical shock, be sure that power is shut off and the treadmill is unplugged from the electrical outlet before performing any cleaning or maintenance procedures.

After Each Use — Wipe up any liquid spills immediately. After each workout, use a cloth to wipe up any remaining perspiration from the handrails and painted surfaces.

Be careful not to spill or get excessive moisture between the edge of the display panel and the console, as this might create an electrical hazard or cause failure of the electronics.

As Needed — Vacuum any dust or dirt that might accumulate under or around the 710T. Motors are especially susceptible to dust and dirt, and restricted airflow can prevent adequate cooling that could shorten motor life. Cleaning this area should be done as often as indicated in the *Service Schedule*.

! WARNING: Keep wet items away from inside parts of the treadmill. Electrical shock could occur even if the treadmill is unplugged.

4 Preventive Maintenance

Regular Maintenance Activities	4-1
Cleaning Your Treadmill	4-1
Running Belt Maintenance	4-2
Other Preventive Maintenance	4-6
Service Schedule	4-7
Log Sheet	4-8

To clean the motor components, you must remove the two Phillips head screws that hold the motor cover in place. Lift the cover, and put it and the screws aside. Use a vacuum attachment or hand vacuum to clean the exposed elevation assembly, drive motor, lower electronics and the surrounding areas.

Also use a dry cloth for the areas that you can't reach with the vacuum cleaner. If the machine has not been used for some time or is excessively dirty, use a *dry* cloth to wipe all exposed areas. Replace the cover and screws when finished.

With the help of another person, lift the rear of the treadmill and roll it back from its present position so as to vacuum the floor area underneath the unit. Wipe clean the underside of the 710T to prevent dirt and dust build-up. When finished, return the treadmill to its normal position.

Contact Heart Rate Grips — Contaminants, such as hand lotions, oils or body powder, may come off on the contact heart rate grips. These can reduce sensitivity and interfere with the heart rate signal. It is recommended that the user have clean hands when using the contact heart rate. Clean the grips using a cloth dampened with a cleaning solution containing alcohol. The grips are the only part of the treadmill you should use a cleaning solution containing alcohol.

In addition, the nickel plating on the 710T may become tarnished and blackened with time. This may reduce sensitivity and interfere with the heart rate signal. Use an emery cloth to remove the tarnish from the exposed nickel plating on the heart rate grips.

Running Belt Maintenance

Belt and Deck — Clean the belt and the deck surfaces to minimize the effect of friction between the wood deck and the running belt. Clean the underside of the running belt and the top of the running deck surface by wiping them with a clean dry towel. This should be done often to prevent premature wear of the deck, running belt, and the drive motor system. See the *Service Schedule* in this chapter to determine the minimum recommended cleaning.

The running belt may become loose and slip on the drive roller with each foot plant. The 710T is equipped with visual indicators of belt tension. These are located at the rear of the treadmill where the two 3/4" bolts protrude from the plastic end caps. See Figure 1. These are designed to indicate if the running belt is at the proper tension to insure safe operation of the unit. If the belt has become loose, the silver colored washer located under the bolt will move out slightly from the protruding tab molded in the end cap. See the *Service Schedule* in this chapter to determine the minimum recommended checking of the belt tension.

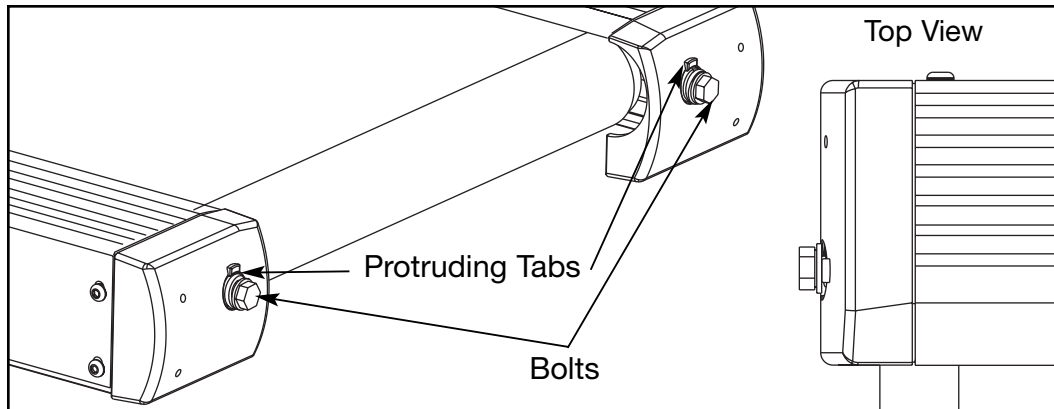


Figure 1

Re-tensioning and Re-centering the Belt — Follow the procedure below.

Tools Required

- 3/4" wrench

1. Re-tension the belt.

- A.** Use a 3/4" wrench to turn each bolt clockwise until the silver washers are flush with the protruding the tab on the end caps. See Figure 1.
- B.** Turn the power on and press the **Manual** key. Press the **Up Arrow** to bring the speed up to 3.5-4 mph (5.6-6.4 kph).
- C.** Allow the treadmill to run for a minute or two. Observe the bolts and silver washers. If they begin to protrude or retract turn the treadmill off and adjust the bolts. Follow the next step to be sure the belt is centered.

! CAUTION: *Be careful not to over tighten the belt. Over tightening the belt can create excessive tension on the front and rear rollers.*

! CAUTION: *While centering the belt choose one bolt to adjust. Do not adjust both bolts.*

2. Re-center the belt.

- A.** With the treadmill running at 5 mph (8 kph) observe the running belt. If the belt tracks off center to the right or left the deck will become exposed. Use a 3/4" wrench to tighten the rear roller bolt on the side of the treadmill toward which the belt is moving. For example: If the belt moves to the right and the deck becomes exposed on the left, use a wrench to tighten the bolt on the right side of the frame, tighten about 1/2 of a turn (clockwise) and wait 30 seconds. If the belt does not move back to the center of the treadmill, make another adjustment to the

4 Preventive Maintenance

Regular Maintenance	
Activities	4-1
Cleaning Your Treadmill	4-1
Running Belt Maintenance	4-2
Other Preventive	
Maintenance	4-6
Service Schedule	4-7
Log Sheet	4-8

same bolt. Once the running belt has been adjusted closer to the center of the treadmill use about 1/4 of a turn until the belt has been stabilized.

- B.** After the belt has been centered, check the belt tension again. Make sure the running belt tension is tight enough so that the belt does not slip or hesitate when stepped on. Walk on the treadmill at 3.5-4 mph (5.6-6.4 kph) and every 4th to 5th step throw your weight into your step to feel if the belt is slipping. If the belt does slip, use a wrench to equally tighten **both** rear roller adjustment bolts 1/2 of a turn (clockwise). Adjust the belt until no further slipping is felt. If the running belt continues to slip the drive belt could be loose.

NOTE: *The springs may eventually compress slightly. If they compress the silver washers may no longer be flush with the protruding tab on the end caps when the belt is properly tensioned. The washers will be positioned deeper into the end cap and not be as visible.*

Checking the Belt and Deck Surfaces — The running belt and deck should be checked periodically for any excessive wear. In an effort to make sure that the running belt operates properly, visually inspect the belt on a weekly basis to make sure that there are no tears or fraying in the belt material.

To inspect the edges of the belt, it is necessary to remove the motor cover and plastic side rails. Follow these steps:

Tools Required

- Phillips head screwdriver
- 3/16" Allen wrench
- Dry towel

1. Turn the power off.

- A.** Turn the main power switch on the front panel to the off (O) position.
- B.** Unplug the treadmill from the power outlet.

2. Remove the motor cover and side rails.

- A.** Remove the two Phillips head screws that fasten the motor cover to the frame. Lift the cover and set it aside. This will allow you to remove the side rails. See Figure 2.
- B.** Using a 3/16" Allen wrench, remove the two button head screws on the sides of each side rail. See Figure 2.
- C.** Grasp the top edge of each side rail and pull up and away from the deck. This will enable you to see the deck and edges of the belt. It is not necessary to remove the side rails completely off the frame.

3. Check the belt and deck condition.

- A.** Look at the edges of the belt while you roll it by hand. If the belt has any rips or looks

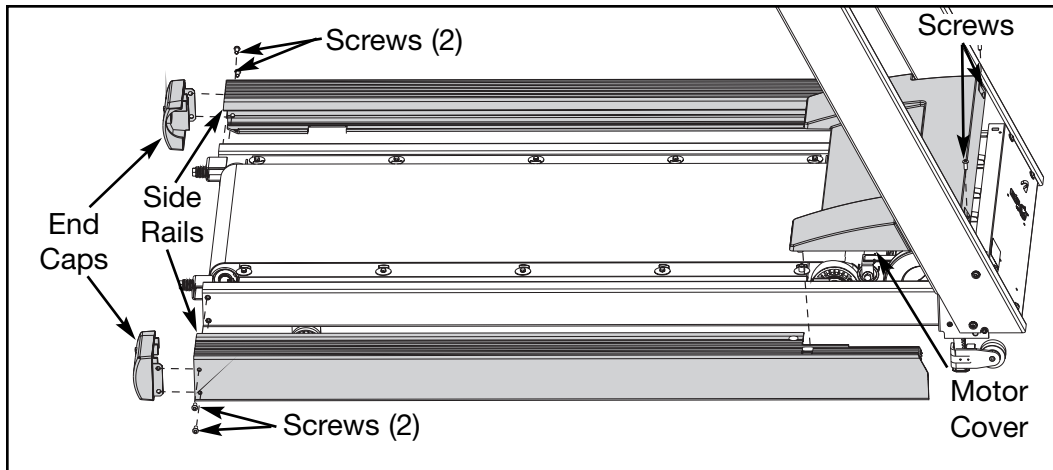


Figure 2

excessively worn the belt needs to be replaced.

- B.** Run your hand under the belt on the top of the deck surface. If you feel excessive ridges or cracks, or if the deck feels grooved yet highly polished, the deck should be flipped so that an unused surface faces the top. If the deck is worn on both sides it should be replaced. In time, a worn belt and deck can cause high current draw and ultimately, motor failure. For instructions on replacing the belt and deck, see *Running Belt and Deck* in the the *Service* chapter.

4. Clean under the belt.

- A.** To minimize the effect of friction between the deck and the running belt, Cybex recommends cleaning the underside of the running belt and the top of the running deck surface by wiping them with a clean, dry towel. This cleaning should be done each time you check the belt and deck condition to prevent premature wear of the deck, running belt and the drive motor system. See the *Service Schedule* in this chapter.

5. Replace the side rails and motor cover.

- A.** After completing the inspection and cleaning of the deck surface, snap the side rails back down into their original position.
- B.** Using a 3/16" Allen wrench, attach the two button head screws on the sides of each side rail. See Figure 2.
- C.** Lower the motor cover in place and tighten the two Phillips screws. See Figure 2.

4 Preventive Maintenance

Regular Maintenance	
Activities	4-1
Cleaning Your Treadmill	4-1
Running Belt Maintenance	4-2
Other Preventive	
Maintenance	4-6
Service Schedule	4-7
Log Sheet	4-8

Other Preventive Maintenance

Cybox recommends that the following maintenance activities be completed by a qualified service technician. These activities should be performed at the recommended intervals listed in the *Service Schedule* (located in this chapter):

- Measure the motor brushes and replace worn motor brushes
- Rotate, flip and replace the running deck.
- Replace the running belt
- Check the current draw
- Measure motor voltage at maximum speed, with no load

Refer to the *Service* chapter for detailed procedures when completing the tasks listed above. If you need to order a manual, call Cybox at 800-766-3211 or in some areas call 508-533-5183.

Service Schedule

All of the activities listed below should be performed at the time of reaching the mileage listed. As a aid to keep this schedule, Service Reminders will prompt you when an activity is due. After completing the activities required, you can clear the log by following the instructions in the *Service* chapter under *Diagnostic Tests, d12*.

Odometer Reading in Miles (Km)	Check Running Belt & Tension/Track as needed	Vacuum debris inside hood cover and clean treadmill	Rotate the Deck	Replace the Running Belt	Flip the Running Deck	Replace the Running Deck	Check the current draw	Measure Motor Brush Length	Measure Motor Voltage at Max Speed, No Load
500 (805)	X								
m1: 5000 (8046)	X	X							
m2: 10000 (16093)	X	X	X	X					
10500 (16898)	X								
m3: 15000 (24140)	X	X			X			X	
m4: 20000 (32187)	X	X		X					
20500 (32992)	X								
m5: 25000 (40234)	X	X	X						
m6: 30000 (48280)	X	X		X		X	X	X	X
30500 (49085)	X								
m7: 35000 (56327)	X	X							
m8: 40000 (64374)	X	X	X	X					
40500 (67178)	X								
m9: 45000 (72420)	X	X			X		X	X	X
m10: 50000 (80467)	X	X		X					
50500 (81272)	X								
m11: 55000 (88514)	X	X	X						
m12: 60000 (96560)	X	X		X		X	X	X	X
60500 (97365)	X								
m13: 65000 (104607)	X	X							
m14: 70000 (112654)	X	X	X	X					
70500 (113459)	X								
m15: 75000 (120701)	X	X			X		X	X	X
m16: 80000 (128748)	X	X		X					
80500 (129552)	X								
m17: 85000 (136794)	X		X						
m18: 90000 (144841)	X	X		X		X	X	X	X

115V Unit Current Draw: 160 lbs. user displayed current of 10.9 Amps at 0% Grade. Max current 17.9.
 220V Unit Current Draw: 160 lbs. user displayed current of 9.1 Amps at 0% Grade. Max current 15.4.

Minimum brush length, as measured from top of 'box' shape to the bottom: 0.438 (7/16") (1.1 cm)

Running belt should not noticeably slip when loaded at 3.0 MPH. If so, tighten each rear bolt 1/4 turn clockwise and retest.

Motor voltage at 10.0 MPH no-load should not go below:
 115V Unit: 83 Volts
 220V Unit: 168 Volts

4 Preventive Maintenance

Regular Maintenance	
Activities	4-1
Cleaning Your Treadmill	4-1
Running Belt Maintenance	4-2
Other Preventive	
Maintenance	4-6
Service Schedule	4-7
Log Sheet	4-8

Log Sheet

Serial Number _____ Date of Installation _____

Date of Data Collection									
Total Miles/Kilometers									
Total Hours									
Motor Current @ 3 mph (4.8 kph)									
Motor Voltage @ 10 mph (16.1 kph)									
- without load									
- with 160 lbs. load (72 kg)									
Notes:									
Total Miles/Kilometers									
Total Hours									
Motor Current @ 3 mph (4.8 kph)									
Motor Voltage @ 10 mph (16.1 kph)									
- without load									
- with 160 lbs. load (72 kg)									
Notes:									
Total Miles									
Total Hours									
Motor Current @ 3 mph (4.8 kph)									
Motor Voltage @ 10 mph (16.1 kph)									
- without load									
- with 160 lbs. load (72 kg)									
Notes:									
Total Miles/Kilometers									
Total Hours									
Motor Current @ 3 mph (4.8 kph)									
Motor Voltage @ 10 mph (16.1 kph)									
- without load									
- with 160 lbs. load (72 kg)									
Notes:									

5 - Setup & Assembly

Quick Setup

Quick Setup - For Experienced Fitness Professionals Only

1. The power requirements for this treadmill are a grounded, dedicated circuit, and one of the following: 115 VAC, 60 Hz and 20 amps, or 230 VAC, 50 Hz, and 15 amps, or 208/220 VAC, 60 Hz and 15 amps. The location should be level, with good ventilation, and not in an area of high humidity.
2. Assemble the treadmill using the instructions in the *Setup & Assembly* chapter.
3. Operate treadmill at all speeds and elevations to confirm proper operation.
4. Connect CSAFE equipment if applicable.
5. Refer to *Setting Operations Options* to see if any changes are necessary; in most cases, the default values are the desired settings.

Choosing & Preparing a Site


Before you assemble the treadmill be sure to select a suitable site and have the proper electrical outlet power available for optimum operation and safety. See the *Electrical Power Requirements* section below for direction in locating your treadmill's voltage requirements.

The area you select for the 710T should be well lit and well ventilated. Locate the treadmill on a structurally sound and level surface (do not place in recessed areas or on plush carpet) a few feet away from walls and other equipment. Each side of the treadmill should have a 39" (1 m) minimum space. Behind the treadmill should be 78" (2 m) minimum of space. Allow enough clearance for safe access and passage during use of the machine. If the 710T is to be located above the first floor, place it near or above major support beams. If the area has a heavy, plush carpet, the airflow around the base of the machine may be restricted or the carpeting may interfere with the moving parts. To protect the carpeting and the machinery, place a 3/4" (1.9 cm) thick wood base under the treadmill.

Do not install the 710T in an area of high humidity, such as in the vicinity of a steam room, sauna, indoor pool, or outdoors. Exposure to extensive water

5 Setup & Assembly

Quick Setup	5-1
Choosing & Preparing a Site	5-1
Electrical Power Requirements	5-3
Unpacking	5-3
Assembling the Treadmill.	5-4
Testing the 710T Operation.	5-9
Setting Operation Options.	5-10

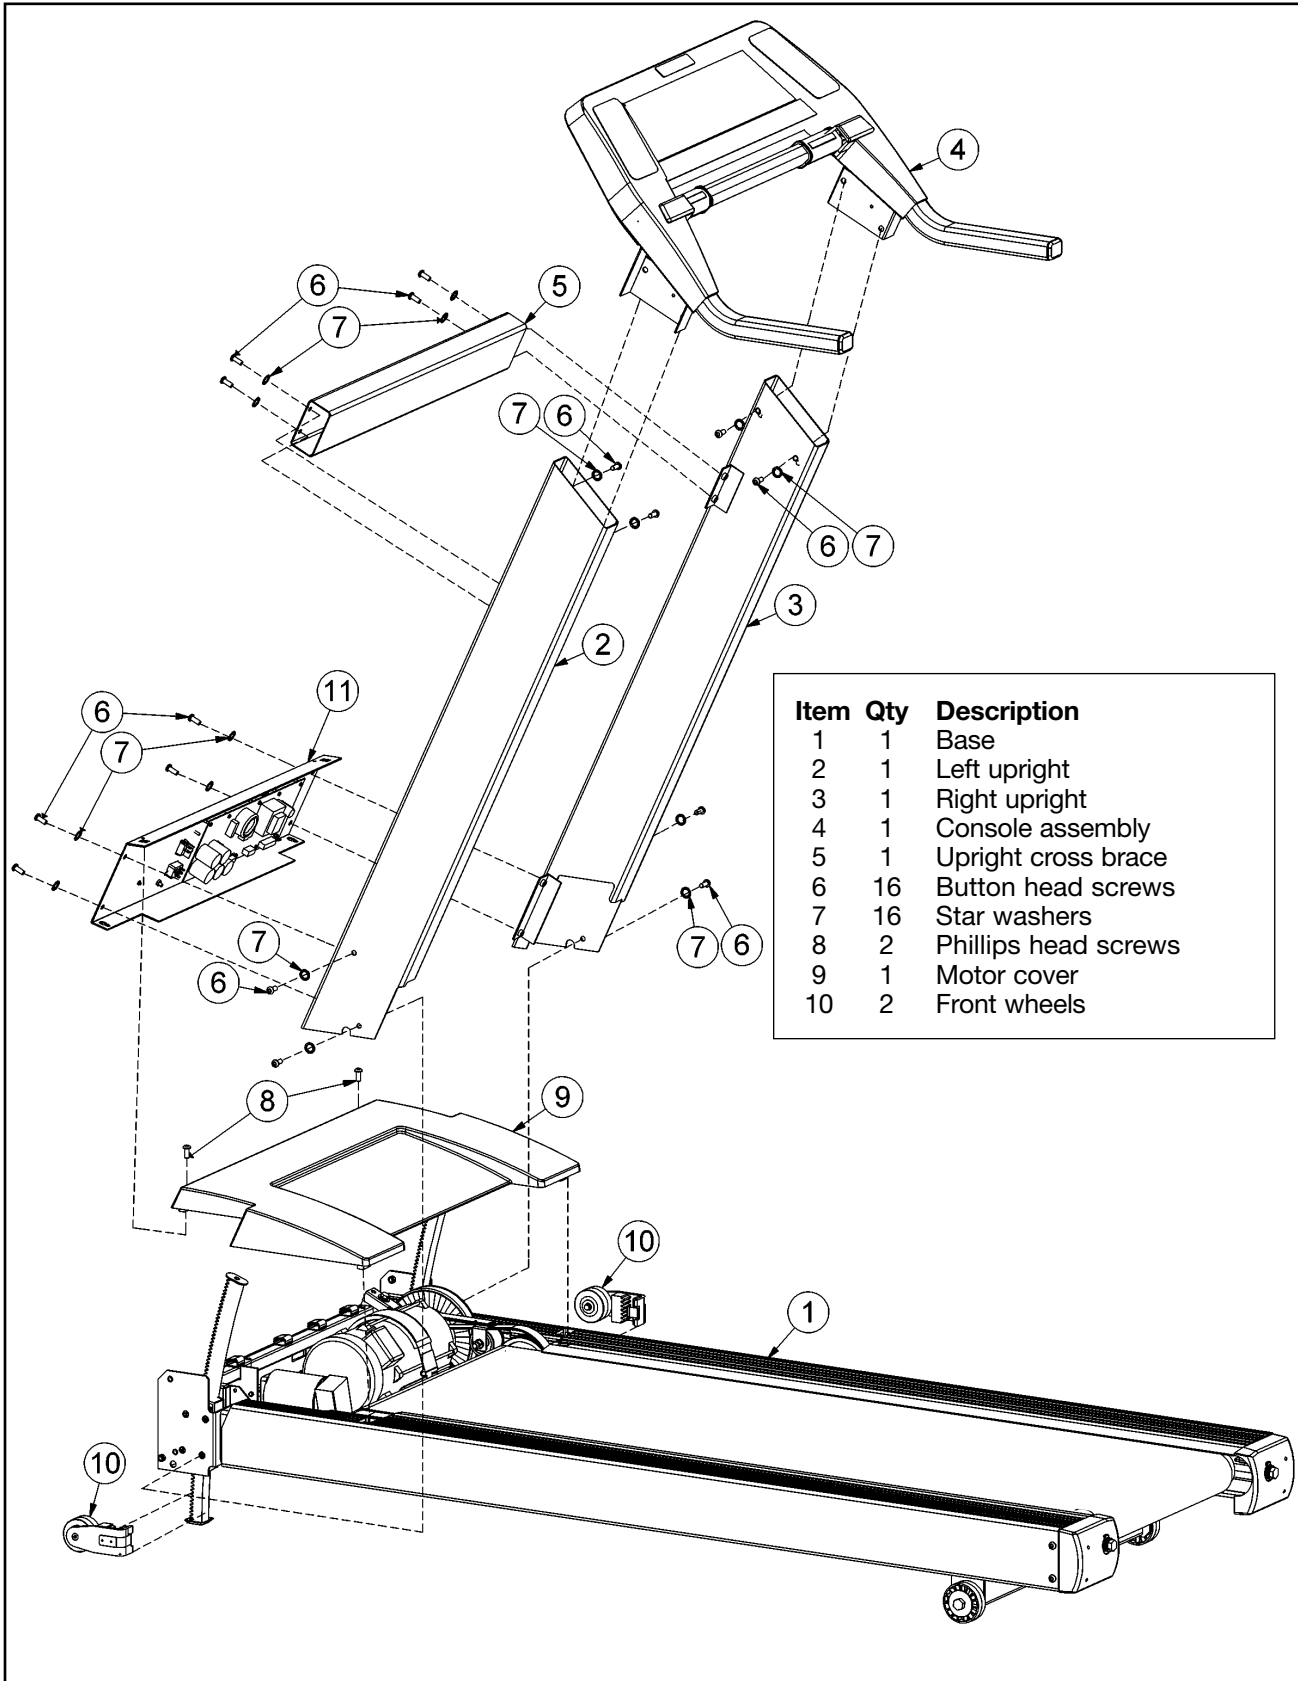

Item	Qty	Description
1	1	Base
2	1	Left upright
3	1	Right upright
4	1	Console assembly
5	1	Upright cross brace
6	16	Button head screws
7	16	Star washers
8	2	Phillips head screws
9	1	Motor cover
10	2	Front wheels

Figure 1

vapor, chlorine, and/or bromine could adversely affect the electronics as well as other parts of the machine.

A comfortable environment will help you enjoy your exercise routine and give you additional motivation to continue.

Electrical Power Requirements

This treadmill is for use on a grounded, dedicated circuit, and one of the following: 115 VAC, 60 Hz and 20 amps, or 230 VAC, 60 Hz, and 15 amps, or 220/240 VAC, 50 Hz and 15 amps. Contact your electrician if you have any doubts about your electrical service.

Do not use a ground plug adapter to adapt the 3-prong power cord plug to a non-grounded electrical outlet. Do not use an extension cord.

Unpacking

Unpack and remove the treadmill parts from the shipping container. Leave the base in the box at this time. Leave the hardware in the bags at this time. Check for the following parts. See Figure 1. If any of the parts are missing contact your Cybex dealer.

- Base
- Uprights (left and right)
- Console assembly
- Cross brace
- Motor cover
- CR lower electronics PCB and panel assembly
- Front wheels (2)
- Owner's Operating Manual with registration card (1, not shown)

Hardware Bags

- Phillips head screws #6-32 x .50 for the front motor cover (2)
- Button head screws 5/16-20 x .75 for assembly (16)
- Star washers 5/16 (16)
- Allen wrench (Hex key), 3/16"
- Wire ties (2)
- Rubber foot pads (2, not shown)

Tools Required

- Phillips head screwdriver
- Allen wrench 3/16" (supplied)

5 Setup & Assembly

Quick Setup	5-1
Choosing & Preparing a Site	5-1
Electrical Power Requirements	5-3
Unpacking	5-3
Assembling the Treadmill.	5-4
Testing the 710T Operation.	5-9
Setting Operation Options.	5-10

Assembling the Treadmill

To ensure correct assembly of the treadmill, carefully follow these steps:

- NOTES:**
- In this manual the words “left” and “right” denote the treadmill user's point of view.
 - Two people are needed to assemble this treadmill.
 - Leave the anti-static foam on the console until the treadmill is completely assembled.*

1. Move the base into position.

- Remove the boxes, parts, and plastic wrapping (*except for the anti-static foam on the console handgrips) from the top of the base.
- Check to be sure that no parts are missing.
- Clip a wheel on each elevation gear rack. See Figure 2.
- Lift the treadmill from the back and roll it to the location you intend to leave it.

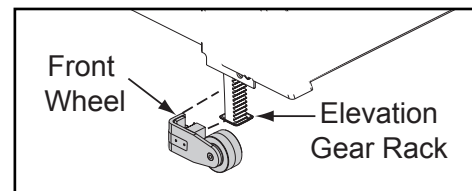


Figure 2

2. Attach the right upright.

- Identify the left and right uprights. The left will have a decal at the bottom.
- Attach the right upright to the base using two button head screws and two star washers. Finger-tighten the screws, leaving them fairly loose at this time. See Figure 3.

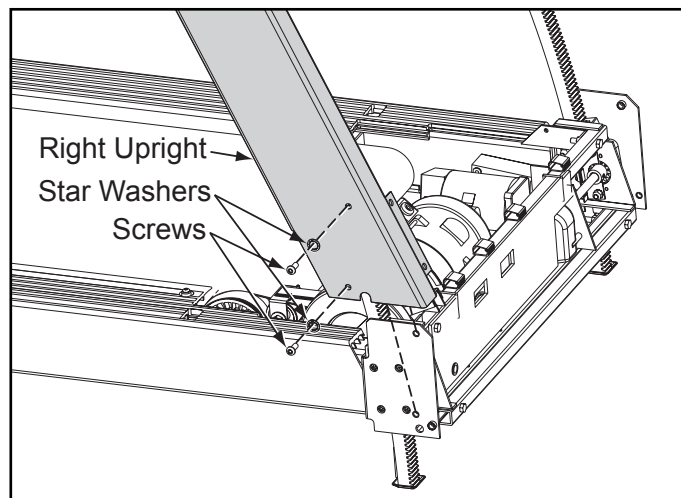


Figure 3

3. Attach the upright cross brace.

- Attach the upright cross brace to the right upright using two button head screws and two star washers. Finger-tighten the screws, leaving them fairly loose at this time. See Figure 4.

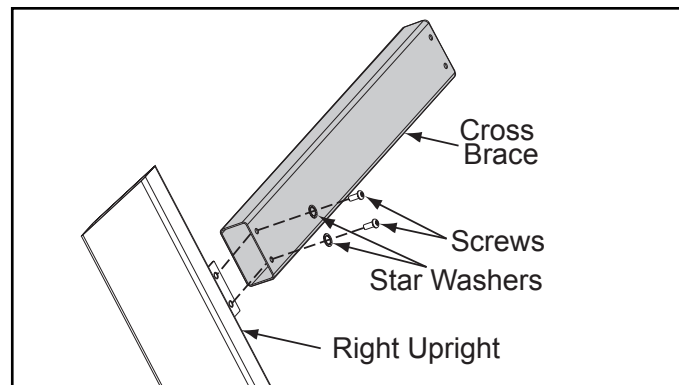


Figure 4

4. Attach the console to the left upright.

- A.** Place the console assembly on the floor with the display side facing down and place the left upright on the floor with the decal end farthest away from the console. See Figure 5.
- B.** Thread the display cable through the inside of the left upright from top to bottom. See Figure 5.
- C.** Pull the cable out of the bottom of the upright. See Figure 5.
- D.** Slide the support over the console's left mounting bracket and loosely fasten the support to the mounting bracket using two button head screws and two star washers. Leave both screws fairly loose at this time. See Figure 5.

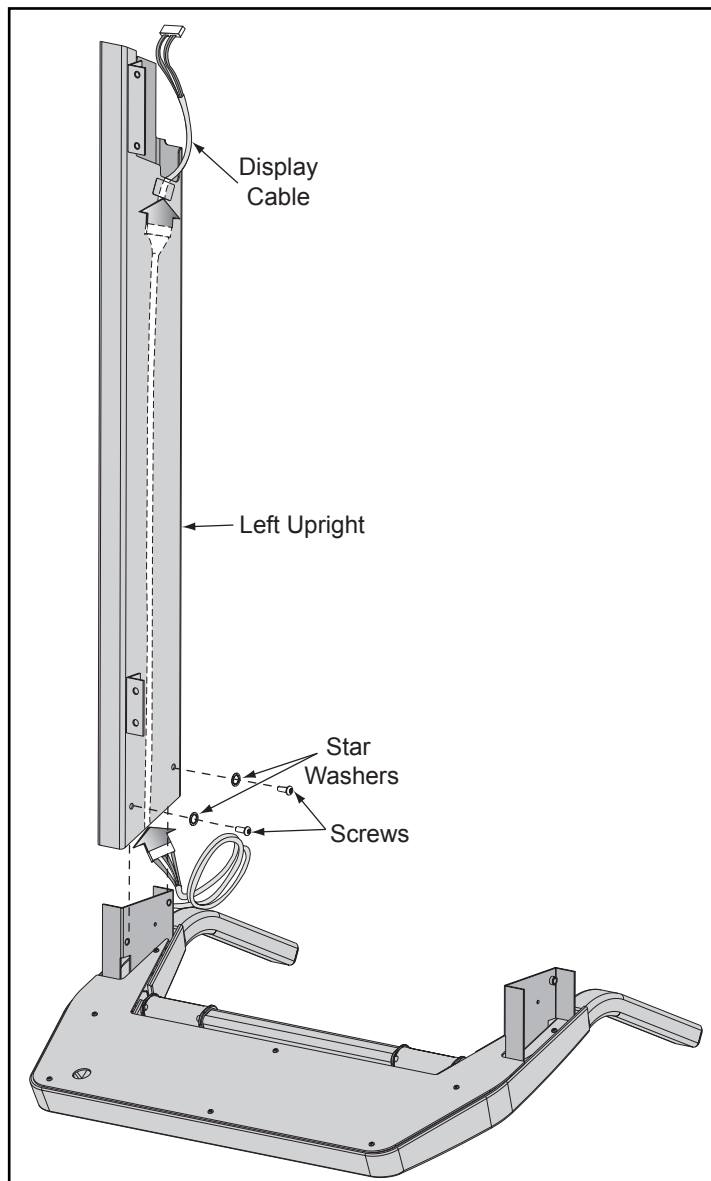


Figure 5

5 Setup & Assembly

Quick Setup	5-1
Choosing & Preparing a Site	5-1
Electrical Power	
Requirements	5-3
Unpacking	5-3
Assembling the Treadmill. . .	5-4
Testing the 710T Operation.	5-9
Setting Operation Options.	5-10

! CAUTION: *Be sure that the display cable does not get pinched, cut or damaged during this process.*

5. Attach the console and left upright to the treadmill.

A. Grasp the display cable and hold it against the inside face of the upright while lifting the console and attached left upright assembly.

B. Place the assembly in position on the treadmill base. See Figure 6. Keep the display cable away from the elevation rack. Be sure that the display cable does not get pinched, cut or damaged during this process.

C. Using the Allen wrench, loosely attach two button head screws and two star washers in three locations; 1.) into the top of the right upright, 2.) into the cross brace and 3.) into the bottom left upright. See Figure 6.

6. Using the 3/16" Allen wrench, tighten all the button head screws at this time.

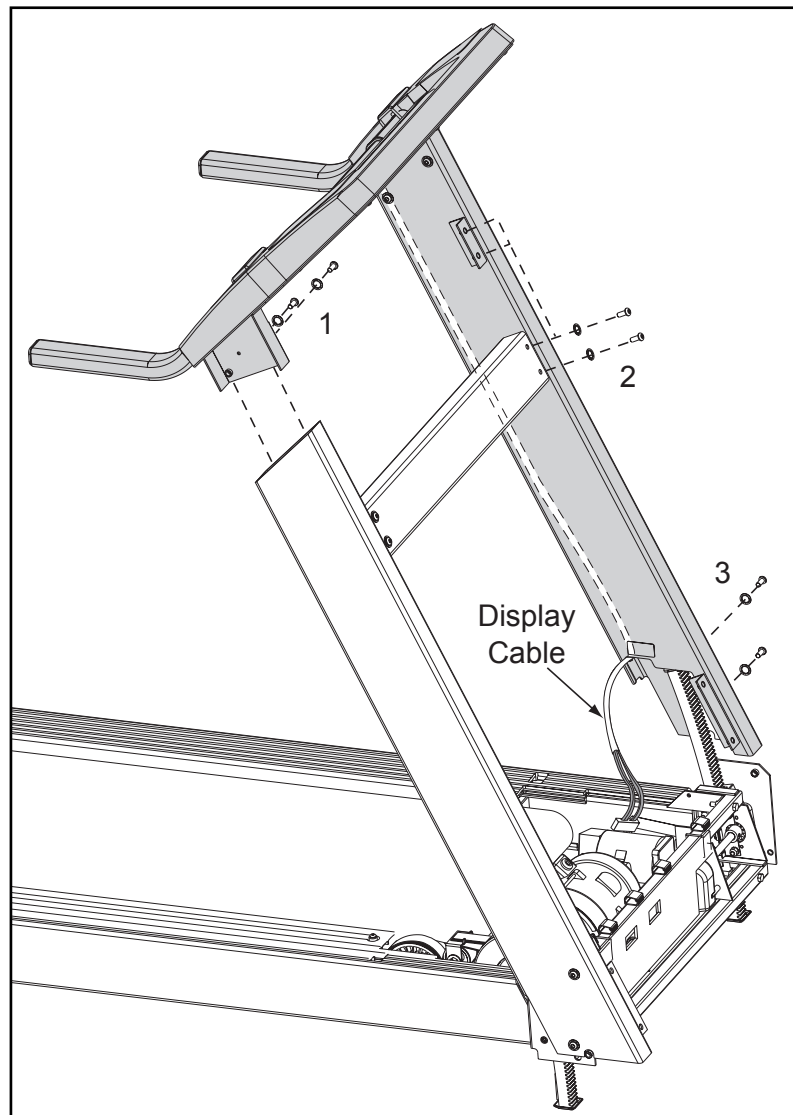


Figure 6

7. Connect the cables.

- A.** Note that there are four threaded holes on the treadmill's front frame used to fasten the front end panel to the treadmill base. Temporarily insert button head screws in the two bottom threaded screw holes. Screw the screws in approximately halfway. See Figure 7.
- B.** Pick up the front panel and hold it parallel to the floor, with the printed circuit board facing up. Temporarily mount the panel by placing it over the two button head screws on the treadmill's front end as referenced in the previous step. Use the screws to support the panel much like a shelf. See Figure 7.
- C.** Ensure the black mark on the display cable is visible, and wire tie it to the frame as it exits the upright. See Figure 7.
- D.** Pinch the retaining clips (to open them) and route the display cable through each of them across the top of the treadmill. See Figure 7. Close the retaining clips.
- E.** Plug all cables into the lower board: (from left to right) the motor/choke connector, the elevation connector, the display cable connector and the speed sensor connector. See Figure 7.

8. Attach the front panel.

- A.** Remove the front panel (with the cable connectors still attached) off the two button head screws. See Figure 7.
- B.** While holding the panel close to the treadmill, remove the two button head screws previously used to support the front end of the treadmill base.

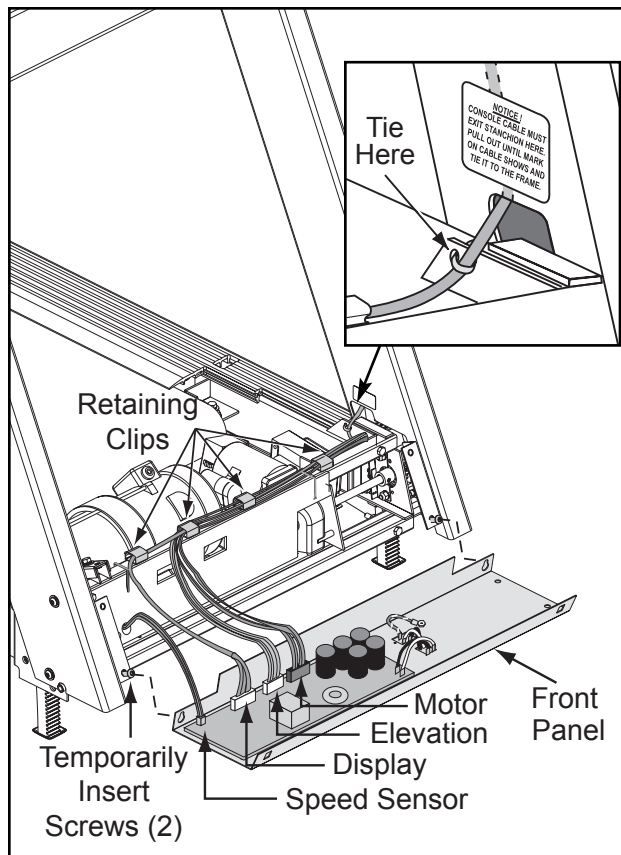


Figure 7

5 Setup & Assembly

Quick Setup 5-1
 Choosing & Preparing a Site 5-1
 Electrical Power
 Requirements 5-3
 Unpacking 5-3
 Assembling the Treadmill. . . 5-4
 Testing the 710T Operation. 5-9
 Setting Operation Options. 5-10

- C. Place the front end panel in position on the front of the treadmill. See Figure 8.
- D. Using the Allen wrench, attach the front end panel with four button head screws and four star washers. See Figure 8.

9. Attach the motor cover.

- A. Place the motor cover in position on the base. See Figure 9.
- B. Using a Phillips head screwdriver, tighten the two screws to fasten the motor cover to the base. See Figure 9.

10. Position the pads.

- A. One person should lift the front end of the treadmill, while a second person places a rubber pad underneath each elevation gear rack.

11. Connect CSAFE.

NOTE: *If necessary, install optional CSAFE-compatible communications. If not skip to the next section, Test the 710T Operation.*

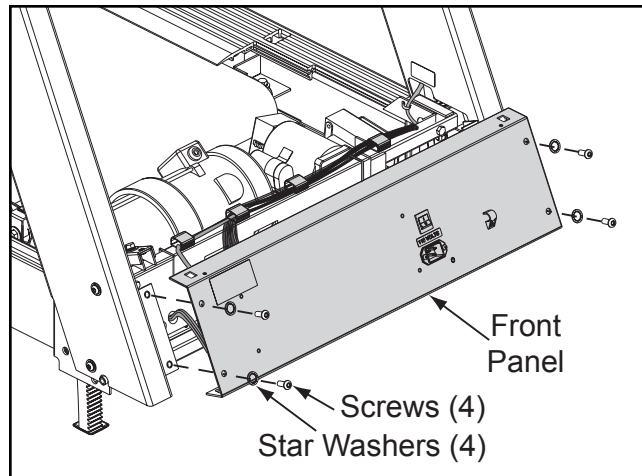


Figure 8

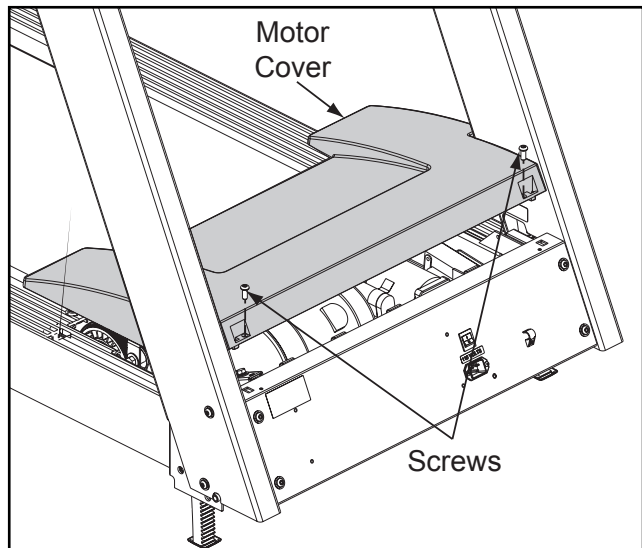


Figure 9

- A. Plug the CSAFE communications cable into the RJ-45 (8-pin) female connector located on the back of the console.

! WARNING: *Be sure that all electrical requirements are met as indicated in the specifications at the front of the manual and at the beginning of this chapter prior to proceeding.*

Test the 710T Operation

Use the following instructions to test the full speed and incline range of the treadmill and to check the belt for proper operation.

! CAUTION *During this procedure STAY OFF THE RUNNING BELT!
Stand with your feet on the side platforms.*

1. Without anyone on the treadmill, plug the power cord into the front end of the treadmill and into a power outlet from a grounded, dedicated circuit, and 115 VAC, 60 Hz and 20 amps, or 230 VAC, 50 Hz, and 15 amps, or 208/220 VAC, 60 Hz and 15 amps.
2. Locate the on/off (I/O) power switch on the front of the treadmill. Toggle it to the on position (I).
3. The control panel will light up and continuously display information on available programs when the treadmill is in *Dormant Mode* with the on/off power switch turned on (I) and the treadmill power cord plugged in. (Cybex recommends that the treadmill be unplugged or the On/Off (I/O) power switch turned Off (O) when it is not in use.)

NOTE: *Cybex recommends that the treadmill be unplugged or the on/off (I/O) power switch turned off (O) when it is not in use.*

4. Press the **START/ENTER** key three times, first to enter the *Selection Mode* menu, second to accept the default of *Manual Mode* and third to accept the default weight.
5. The treadmill begins a countdown in the display window, “**3...2...1,**” and sounds a tone for each count. After it reaches one (1), the treadmill gives a steady tone, and then starts accelerating the belt to reach 1 mph (1.6 kph).
6. Without standing on the running belt, press and hold down the **SPEED +** key until the treadmill reaches a speed of approximately 4 mph (6.4 kph), as indicated on the display.
7. Observe the belt to see that it is running properly; it should stay centered in the middle of the deck. If you have problems with the running belt operation, see *Running Belt Adjustments* in the *Preventive Maintenance* chapter.
8. Press and hold the **SPEED +** key until the treadmill reaches its highest speed, 10 mph (16.1 kph). Then press the **SPEED -** key until the treadmill is back to 1.0 mph (1.6 kph).

5 Setup & Assembly

Quick Setup	5-1
Choosing & Preparing a Site	5-1
Electrical Power	
Requirements	5-3
Unpacking	5-3
Assembling the Treadmill. . .	5-4
Testing the 710T Operation. . .	5-9
Setting Operation Options. . .	5-10

9. Run the treadmill through its full % grade range. Press and hold the **INCLINE** \wedge key until the treadmill reaches its highest grade (15%). Then press the **INCLINE** \vee key until the treadmill is back to 0% grade.
10. Press **STOP** three times to stop the running belt, end the checkout session, and return the display to *Dormant Mode*.

Finish your setup of the 710T by setting the operation options as desired.

Setting Operation Options

The 710T allows you to configure the following features:

1. *Metric/English Measurement Units*
2. *Programs On/Off Mode*
3. *Time Limit*
4. *Speed Limit*
5. *Pause Time*
6. *Service Reminders*

1. Metric/English Measurement Units

You can change the settings to metric units, or back to English units. With the treadmill in the on (I) position and in *Dormant Mode*, press and hold the **STOP** and + buttons at the same time for two seconds. The display will show "METRIC". To change to English, press and hold the **STOP** and - keys at the same time for two seconds and the display will show "ENGLISH".

NOTE: *The next four features can be changed after entering Diagnostic Tests. To enter Diagnostic Tests, press and hold **SCAN/SAVE**, then press -.*

2. Programs On/Off Mode (C14)

The programs on/off mode can be used to prevent or "lock out" the use of the 710T's programs, for *Manual Mode* use only.

To enter Diagnostic Tests, press and hold **SCAN/SAVE**, then press -. You will see the message "DIAGNOSTIC TESTS". Press \vee or \wedge or to scroll to "C14 PGM LOCKOUT". Press the + key to turn the lockout feature on, disabling all programs. Press the - key to turn the lockout features off enabling all programs. Press **START/ENTER** to confirm, and again to save. Press \wedge to scroll to C15.

3. Time Limit (C15)

Use the **SCAN/SAVE** key to toggle the time limit feature off and on, as shown on the display. Press **START/ENTER** to show the number of minutes. When the time limit number of minutes (5 to 95 in 5-minute increments) is displayed, it may be incremented with + key or decremented with - key. Press **START/ENTER** to confirm, and again to save. Press **^** to scroll to C16.

NOTE: *When a time limit is set, the display scrolls "MAX WORKOUT XX Min", when a workout is selected.*

4. Speed Limit (C16)

Use the + or - key to increment the speed limit from 1.1 to 10.0 mph (1.8 to 16 kph). At 10 mph (16 kph) it has no effect. At lower values it limits the speed in both the manual and program modes. Press **START/ENTER** to confirm, and again to save. Press **^** to scroll to C17.

5. Pause Time (C17)

This selection determines the time that a workout may be delayed after the **STOP** key is pressed. If the workout is not re-accessed during this time period the workout terminates automatically. Using the + and - keys, set the pause time to 0:10 Min or 5:00 Min, as shown on the display. Press **START/ENTER** to confirm, and again to save. Press **^** to scroll to C19.

6. Service Reminders (C19)

Service reminders occur every 5000 miles to bring your attention to the regular scheduled maintenance which should be performed for maximum treadmill life and performance. Use the - + keys to toggle the feature on / oFF*. Press **START/ENTER** to confirm, and again to save.

*Service Reminders are an option and can be turned off if you already have a regular schedule of maintenance. In either case, follow the guidelines in the *Service Schedule* in the *Preventive Maintenance* chapter as a minimum for maintaining your Cybex Treadmill for maximum life and performance.

Press **STOP** to exit Diagnostic Tests and return to the mode you were in before entering the Diagnostic Tests.

Your treadmill is now ready for use. Turn to the **Operation** chapter to learn how to operate the treadmill. You should begin with walking speeds first, to be sure everything is functioning properly.

5 Setup & Assembly

Quick Setup	5-1
Choosing & Preparing a Site	5-1
Electrical Power	
Requirements	5-3
Unpacking	5-3
Assembling the Treadmill. . .	5-4
Testing the 710T Operation. .	5-9
Setting Operation Options. .	5-10

6 - Customer Service

Contacting Service

Hours of phone service are Monday through Thursday from 8:30 a.m. to 6:00 p.m. and Friday from 8:30 a.m. to 5:00 p.m. Eastern Standard Time.

For Cybox customers living in the USA, contact Cybox Customer Service at **800-766-3211**. Your options at this number include:

- Press **63** to place a parts order or to check parts order status.
- Press **64** to speak to a technical support representative regarding trouble shooting or to schedule a field service call.
- Press **65** to check status of a repair order only and you have your RRM number.
- Press **66** to check status of a dispatched field service call and you have your inquiry number.
- Press **67** for service of a medical or isokinetic product.
- Press **0** to go to the Cybox operator.

For Cybox customers living outside of the USA, contact Cybox Customer Service at **508-533-4300** or fax **508-533-5183**.

Order parts and find information on the web at www.eCybox.com or by email at techhelp@cyboxintl.com.

Serial Number & Voltage

Your serial number can be found on the rear crossbar under the running deck. The voltage of your treadmill can be found on a label near the on/off (I/O) switch. For your convenience record your serial number and voltage below so that you will have it ready if you call Cybox Customer Service.

Serial Number _____ Voltage _____

Warranty

LIMITED WARRANTY TO NON-CONSUMER BUYERS:

Seller warrants, to the original non-consumer Buyer only, that any product manufactured by it, herein listed under "EXPIRATION OF LIMITED WARRANTIES FOR NON-CONSUMER BUYERS," will be free from defects in material and workmanship, under normal use and service according to the specified warranty duration listed, beginning from the date of installation. Seller's obligation under this

6 Customer Service	
Contacting Service	6-1
Serial Number & Voltage	6-1
Warranty	6-1
Return Material Authorization	
(RMA)	6-4
Damaged Parts	6-5
Ordering Parts	6-5

warranty shall be strictly and exclusively limited to repairing or replacing free of charge, F.O.B. origin, those parts and materials which are, in Seller's judgment, defective. Seller cannot control the environment nor manner in which the products are used; therefore this warranty does not cover corrosion of the products during use, deterioration caused by conditions of use, the sufficiency of the application of finishes and/or cleaners, or the suitability of finishes and/or cleaners for the Buyer's environment. Seller does not warrant the normal maintenance repairs that are identified in the Seller's Owner's Manual. Seller assumes no responsibility for reimbursing repair or replacement expenses incurred without its prior written authorization. Buyer shall be responsible for all labor costs incurred in connection with such repair or replacement at the installation site unless agreed upon by Seller or covered herein. All costs of removing, packing and shipping defective products and parts shall be paid by the Buyer unless otherwise agreed by the Seller. If Seller's authorized representative determines in his sole and final discretion that the nature of the defect precludes remedy by repair or replacement of parts, Seller reserves the right to satisfy its warranty obligation in full by refunding the full purchase price upon return of all products to it, freight prepaid. The products or services of other manufacturers which are furnished by Seller are covered only by such warranties as are given by sold manufacturer to Seller. In this regard, Seller agrees to certify to Buyer the identity of the supplier of items claimed to be defective so that the Buyer may pursue warranty claims against that party.

EXPIRATION OF LIMITED WARRANTIES FOR NON-CONSUMER BUYERS:

Cybex Cardiovascular Products: Seller will warrant labor for 1 year; parts are warranted for 2 years except as follows: structural frame, 10 years; treadmill decks and belts 1 year. Refer to the "LIMITED WARRANTY FOR NON-CONSUMER BUYERS" paragraph above for transportation cost responsibility and further explanation of warranty coverage limitations and exclusions. The 400 and 410T are warranted for residential and light commercial use only.

Cybex Strength Products: Seller will warrant labor for 1 year. Parts are warranted for the time period indicated below. Refer to the "LIMITED WARRANTY" paragraph above for transportation cost responsibility and further explanation of warranty coverage limitations and exclusions. 10 years: structural frame; 2 years: rotary bearings, guide rods, pulleys, cams, weight stacks, cables, bushings, linear bearings, and other parts not listed; 120 days: upholstery and handgrips.

LIMITED WARRANTY TO CONSUMER BUYERS:

Seller warrants, to the original consumer Buyer only, that any product manufactured by it, herein listed under "EXPIRATION OF LIMITED WARRANTIES FOR CONSUMER BUYERS," will be free from defects in material and workmanship, under normal use and service according to the specified warranty duration listed, beginning from the date of installation. Seller's obligation under this warranty shall be strictly and exclusively limited to repairing or replacing free of charge those parts and materials which are defective. Seller cannot control the environment nor manner in which the products are used; therefore this warranty does not cover corrosion of product during use, deterioration caused by the conditions of use, the sufficiency of finishes and/or cleaners applied, or the suitability of finishes and/or cleaners for the consumer Buyer's environment. Seller does not warrant the normal maintenance repairs that are identified in the Seller's Owner's Manual. Seller assumes no responsibility for reimbursing repair or replacement expenses incurred without its prior written authorization. Seller reserves the right to satisfy its warranty obligation in full by refunding the full purchase price upon return of all products to Seller. The products or services of other manufacturers which are furnished by Seller are covered only by such warranties as are given by

said manufacturer to Seller. In this regard, Seller agrees to certify to Buyer the identity of the supplier of items claimed to be defective so the Buyer may pursue warranty claims against that party.

EXPIRATION OF LIMITED WARRANTIES FOR CONSUMER BUYERS:

The PG 400, 400S and 300T are warranted for residential use only.

The 400T and 410T are warranted for residential and light commercial use only.

Cybex Cardiovascular Products: Seller will warrant labor for 1 year; parts are warranted for 2 years except as follows: structural frame, 10 years, treadmill decks and belts 1 year.

Cybex Strength Products: Seller will warrant labor for 1 year; parts are warranted for 2 years with the exception of the structural frame which is warranted for 10 years.

DISCLAIMER OF WARRANTIES AND LIMITATION OF REMEDIES:

SELLER MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, WITH REGARD TO GOODS OR SERVICES PROVIDED BY SELLER OTHER THAN THOSE SET FORTH HEREIN. IN THE CASE OF NONCONSUMER BUYERS, ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED, AND ANY WARRANTY OTHER THAN THE WARRANTIES EXPRESSLY PROVIDED HEREIN IS SPECIFICALLY EXCLUDED.

IN THE CASE OF CONSUMER BUYERS, THE DURATION OF ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS LIMITED TO THE DURATION OF THE EXPRESS WARRANTIES PROVIDED HEREIN.

SELLER WILL NOT BE LIABLE FOR ANY DIRECT OR INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES, LOSSES, OR EXPENSES, INCLUDING, BUT NOT LIMITED TO COMMERCIAL LOSSES, BUSINESS INTERRUPTION, OR DAMAGES RESULTING TO PROPERTY OTHER THAN THAT WHICH IS THE SUBJECT OF THE SALES TRANSACTION.

Notice to Consumer Buyers: Some states do not allow the exclusion or limitation of incidental or consequential damages and/or limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.

ALTERNATIVE DISPUTE RESOLUTION FOR NON-CONSUMER BUYERS ONLY:

SELLER RESERVES THE RIGHT TO MANDATE INFORMAL DISPUTE RESOLUTION TO SETTLE ANY OR ALL CLAIMS RESULTING FROM THIS SALES TRANSACTION. ALTERNATIVE DISPUTE RESOLUTION PROCEEDINGS WILL BE CONDUCTED IN THE STATE OF MASSACHUSETTS ACCORDING TO THE COMMERCIAL RULES OF THE AMERICAN ARBITRATION ASSOCIATION. It is understood between the parties that damage to the product, ineffectiveness of the product, or other unintended consequences may result because of many factors including the manner of use or application of the product, all of which are beyond the control of the Seller. All such risks shall be assumed by the Buyer.

6 Customer Service
Contacting Service 6-1
Serial Number & Voltage . . . 6-1
Warranty 6-1
Return Material Authorization . .
(RMA) 6-4
Damaged Parts 6-5
Ordering Parts 6-5

PROCEDURE FOR OBTAINING WARRANTY PERFORMANCE:

TO SECURE THIS WARRANTY IN EVENT OF A DEFECT, BUYER MUST RETURN TO SELLER THE WARRANTY REGISTRATION CARD. CONTACT THE CYBEX CUSTOMER SERVICE DEPARTMENT WITH QUESTIONS REGARDING YOUR WARRANTY BY MAIL OR TELEPHONE FOR INSTRUCTIONS OR A RETURN AUTHORIZATION NUMBER AS PROVIDED BELOW.

Attn: Customer Service Department
Cybox International, Inc.,
10 Trotter Drive
Medway, MA 02053

Return Material Authorization (RMA)

The Return Material Authorization (RMA) system outlines the procedures to follow when returning material for replacement, repair, or credit. The system assures that returned materials are properly handled and analyzed. Follow the following procedures carefully.

Contact your authorized Cybox dealer on all warranty-related matters. Your local Cybox dealer will request an RMA from Cybox, if applicable. Under no circumstances will defective parts or equipment be accepted by Cybox without proper RMA and an Automated Return Service (ARS) label.

1. Call the Customer Service Hotline listed above for the return of any item that is defective.
2. Provide the technician with a detailed description of the problem you are having or the defect in the item you wish to return.
3. Provide the model and serial number of your treadmill. The serial number is located on the rear crossbar under the running deck. The serial number begins with a letter, for example: R09-101331100.
4. At Cybox's discretion, the technician may request that you return the problem part(s) to Cybox for evaluation and repair or replacement. The technician will assign you an RMA number and will send you an ARS label. The ARS label and RMA number must be clearly displayed on the outside of the package that contains the item(s) to be returned. Include a description of the problem, the serial number of the treadmill and the name and address of the owner in the package along with the part(s).
5. Forward the package through UPS to Cybox.
Attn: Customer Service Department
Cybox International, Inc.,
10 Trotter Drive
Medway, MA 02053

NOTE: *Merchandise returned without an RMA number on the outside of the package or shipments sent C.O.D. will not be accepted by the Cybex receiving department.*

Damaged Parts

Materials damaged in shipment should not be returned for credit. Shipping damages are the responsibility of the carrier (UPS, Federal Express, trucking companies, etc.)

Apparent Damage — Upon receipt of your shipment, check all boxes carefully. Any damage seen with a visual check must be noted on the freight bill and signed by the carrier's agent. Failure to do so will result in the carrier's refusal to honor your damage claim. The carrier will provide you with the required forms for filing such claims.

Concealed Damage — Damage not seen with a visual check upon receipt of a shipment but noticed later must be reported to the carrier as soon as possible. Upon discovery of the damage, a written or phone request to the carrier asking them to perform an inspection of the materials must be made within ten days of the date of delivery. Keep all shipping containers and packing materials: they will be needed as part of the inspection process. The carrier will provide you with an inspection report and the necessary forms for filing a concealed damage claim. Concealed damage is the carrier's responsibility.

Ordering Parts

Visit eCybex.com to shop for parts online, or fax your order to 508-533-5183. To speak with a customer service representative, in most areas call 800-766-3211. Otherwise call 508-533-4300.

6 Customer Service	
Contacting Service	6-1
Serial Number & Voltage . . .	6-1
Warranty	6-1
Return Material Authorization . .	
(RMA)	6-4
Damaged Parts	6-5
Ordering Parts	6-5

7 - Service

Service Instruction

! WARNING: All maintenance activities shall be performed by qualified personnel. Failure to do so could result in serious injury.

These activities should be performed at the recommended intervals listed in the *Service Schedule* in the *Preventive Maintenance* chapter:

- Measure the motor brushes and replace worn motor brushes
- Rotate, flip and replace the running deck.
- Replace the running belt
- Check the current draw
- Measure motor voltage at maximum speed, with no load

See the detail procedures for each of these maintenance activities below.

Motor Brushes

! WARNING: Motor brush removal and replacement should be performed by a qualified service technician.

Cybex treadmill motors are of the DC variety, and thus have brushes in them to transfer power to the motor's armature. These brushes are made of a graphite / carbon compound not too unlike pencil lead. They do wear with use, and should be inspected at 15,000 miles (16898 km) and every 15,000 (16898 km) after (or sooner if your didn't replace them at the last inspection). Measure the length of the brush itself, and don't include the spring, cable, or spring mount post on the top of the brush. Brushes should be replaced when they are measured to be 7/16" (11mm) or less.

NOTES: *Motor brushes are wear items that will periodically need to be replaced. Both drive motor brushes must be replaced as a pair. This will ensure even commutator contact and brush wear. However, the negative brush will wear 20% faster than the positive brush. Therefore, always measure the negative brush length to determine whether you should replace the pair. The negative brush has a white lead and is facing the floor. You should still check the positive brush for cracks or chips. It is not necessary to remove the drive motor in order to reach the motor brushes. You can get at the lower brush from underneath the treadmill.*

Tools Required

- Phillips head screwdriver (or hex key for some models)
- Large flat head screwdriver (or brush cap tool, part number FS-12263)
- Tape measure

7 Service	
Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

! WARNING: Keep wet items away from inside parts of the treadmill. Electrical shock could occur even if the treadmill is unplugged.

1. Turn the power on.

A. With the power cord plugged in turn the main power switch to the on (I) position.

2. Elevate the treadmill.

A. Without standing on the belt, press the **START/ENTER** key and begin running the treadmill.

B. Press the \wedge arrow and elevate the treadmill fully.

3. Turn the power off.

A. While the treadmill is still fully elevated and running turn the main power switch to the off (O) position.

B. Unplug the treadmill from the power outlet.

4. Remove the motor cover.

A. Remove the screws that fasten the motor cover to the frame.

B. Lift the cover and remove it from the treadmill. Set the cover and screws aside.

5. Disconnect the motor cable.

A. Using a 3/16" Allen wrench, remove the four button head screws and four starwashers that hold the front panel in position.

B. Place the front panel on the floor or temporarily screw two of the button head screws into the frame where they came out, and then hang the front panel on the screws.

C. Avoid touching R34 and the black capacitors. Disconnect the motor cable. See Figure 1.

6. Remove the brush caps.

A. Using a large flat head screwdriver unscrew the two brush caps on the drive motor. The brushes should spring out. The lower brush cap may be difficult to remove with a long screwdriver. If you need a brush cap tool, order Cybex part number FS-12263.

NOTE: *If the brush doesn't spring out, you can use a small screwdriver or needle nose pliers to pry up the base of the brush spring. If the brush spring is broken, ensure no loose parts are left behind.*

7. Examine the brushes and commutator.

A. Inspect the commutator by looking through the top brush holder into the motor. Slowly spin the motor by turning the flywheel. Look for noticeable damage and for signs of wear such as arcing, pitting, burning, or uneven wear. Commutator bars that are 'dirty penny' brownish copper are in great condition. However, some commutator bars may

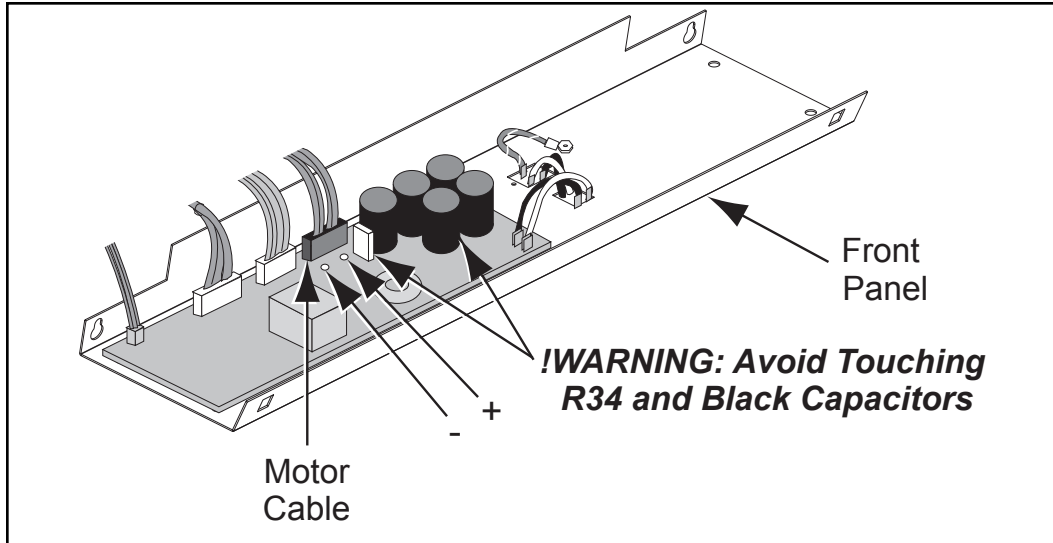


Figure 1

be pitted or blackened on one edge. Too many of these indicate a worn commutator, and the motor should be replaced. The commutator may be cleaned with narrow commutator stone if carbon build-up is present. (File down the stone if it won't fit in the brush holder hole.) Brush dust can be loosened from the brush holder area by lightly filing the surfaces. Dirt and brush dust inside the drive motor can cause a short and should be vacuumed out of the motor.

- B.** Inspect the brushes for signs of excessive wear or cracks. The motor brushes must be replaced if one or both is worn to .438" (7/16"/11.13mm) or less in length, is broken or chipped, has a broken spring, or binds in the motor. See Figure 2.




Figure 2

8. Secure the brushes.

- A.** Slide the brushes (new or original) into the motor brush holders. If the new brush does not slide in easily, the edges or corners of the brush can be lightly filed down. If cleaning the motor, (see step 6A), and filing the brush doesn't allow the brush to slide easily in the brush holder, the motor should be replaced.

NOTE: The motor may make a clicking noise as new brushes wear in. If you reinstall the original brushes it is good to install them facing their original position. Reversing the orientation of the brush can cause a clicking noise during operation until the brushes wear in.

9. Secure the brush caps.

- A.** Place each brush in its brush holder and carefully push the spring in while screwing on the brush cap. If the brush cap is damaged, order Cybex replacement part number HX-10300-2.

7 Service

- Service Instruction 7-1
- Motor Brushes 7-1
- Motor Current & Voltage 7-4
- Running Belt & Deck 7-7
- Drive Belt 7-9
- Front Roller 7-9
- Rear Roller 7-10
- Error Codes 7-11
- Diagnostic Tests 7-13
- Parts List 7-20
- Exploded View 7-23
- 710T Schematic 7-24

10. Secure the front panel.

- A. Avoid touching R34 and the black capacitors. Connect the motor cable. See Figure 1.
- B. Using a 3/16" Allen wrench, secure the front panel to the frame with the four button head screws and four starwashers.

11. Secure the motor cover.

- A. Lower the motor cover in position and install the two Phillips head screws that hold it in place.

12. Turn the power on.

- A. Connect the treadmill to the power outlet.
- B. Turn the main power switch to the on (I) position.
- C. The treadmill will lower itself. Wait until the treadmill resets its elevation to 0%.

13. Clear the error log.

- A. Enter *Diagnostic Test Mode*, press and hold **SHIFT**, then press **-**.
- B. Display the error codes by pressing **START** (forward), **SHIFT** (backward) and scrolling to Test 11. View each error code by pressing **- +**. Make a note of the errors and refer to the manual for the interpretation of these errors.
- C. To clear the entire error log press **v** to exit Test 11, then press **START** to scroll to Test 12. Then press **v** to cycle the display from ErrS (Error codes SET) to ErrC (Error codes CLEARED). With ErrC displayed press **START**.
- D. Exit *Diagnostic Test Mode* by pressing **STOP**.

Motor Current & Voltage

! WARNING: This motor current and voltage procedure should be performed by a qualified service technician.

Check the Current Draw

Cybex recommends that a qualified technician check your motor current draw and measure motor voltage as scheduled in the *Service Schedule* in the *Preventive Maintenance* chapter. By performing these procedures you can evaluate the performance of your drive motor and help prevent premature failure.

Cybex commercial treadmills have the unique feature of monitoring motor current from the display board. The current measure is most accurate when used at 3.0 mph (4.8 km/h). With a 160 lb. (72.5 kg) person walking on the treadmill at this speed, the current measure number

displayed should not exceed 10.9 for a 115V unit, and 9.1 for a 220V unit. With a user of any weight, the current should not exceed 17.9 for a 115V unit and 15.4 for a 220V unit. If higher current values are shown, the next higher mileage service interval should be performed.

Measure Motor Voltage at Max Speed, No Load

A qualified Cybex service technician should perform this test. It involves opening up the front cover, gaining access to the electronic control board, and measuring the voltage on the motor leads. Measure this at 10 mph (16 km/h) with nobody on the treadmill. The measured voltage is an indication of the health of the motor. Motor voltage should not be below 83 volts DC for the 115V unit and 168 volts for the 220V unit. If below these minimums, the motor must be replaced.

Tools Required

- Phillips head screwdriver
- Flat head screwdriver
- 3/16" Allen wrench
- Voltage meter

1. Measure current draw.

- A. Stand on the side rails and press the **START/ENTER** key and enter *Manual Mode*.
- B. Enter *Diagnostic Test Mode*, by pressing and holding **SHIFT**, then press **-**.
- C. Press **START** to scroll to d3. Press **SHIFT** if you need to scroll backward.
- D. With the belt moving at 1 mph (1.6 kph), you will see a number displayed which represents motor current in DC current.
- E. Without standing on the belt, press the **+** key to bring the speed of the treadmill up to 3 mph (4.8 kph). At 3 mph (4.8 kph) average current draw should be between 2.00 and 3.00 without anyone on the running belt.
- F. Now, have a user walk on the belt at 3 mph (4.8 kph). The maximum current draw with a 160 lb. user should not exceed 17.9 for a 115V unit and 15.4 for a 220V. Even with a heavier user, the current should not be more than 15.4/17.9 respectively.
- G. Press **STOP** to exit *Test Mode*.

2. Turn the power off.

- A. Turn the main power switch in the front panel to the off (O) position.
- B. Unplug the treadmill from the power outlet.

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

3. Remove the motor cover and side rails.

- A.** Remove the two Phillips head screws that fasten the motor cover to the frame. Lift the cover and set it aside. This will allow you to remove the side rails.
- B.** Using a 3/16" Allen wrench, remove the two button head screws on the sides of each side rail.
- C.** Grasp the top edge of each side rail and pull up and away from the deck. This will enable you to see the deck and edges of the belt. It is not necessary to remove the side rails completely off the frame.

4. Check the belt and deck condition.

- A.** Look at the edges of the belt while you roll it by hand. If the belt has any rips or looks excessively worn the belt needs to be replaced.
- B.** Run your hand under the belt on the top of the deck surface. If you feel excessive ridges or cracks, or if the deck feels grooved, yet highly polished, the deck should be flipped so that an unused surface faces the top. If the deck is worn on both sides it should be replaced. In time, a worn belt and deck can cause high current draw and ultimately, motor failure. See *Running Belt and Deck* in the *Removal and Replacement* chapter of the Service Manual.

! WARNING: Keep wet items away from inside parts of the treadmill. Electrical shock could occur even if the treadmill is unplugged. The motor voltage test should be performed by a qualified service technician. Do not touch the resistor labeled R34 or black capacitors to avoid electrical shock.

5. Remove the front panel.

- A.** Using a 3/16" Allen wrench, remove the four button head screws and four starwashers that hold the front panel in position.
- B.** Place the front panel on the floor or temporarily screw two of the button head screws into the frame where they came out, and then hang the front panel on the screws.

6. Measure motor voltage.

- A.** Press **START/ENTER** twice to enter *Manual Mode*.
- B.** Without standing on the belt, press the + key to bring the speed of the treadmill up until the treadmill reaches its highest speed, 10 mph (20 kph).
- C.** Touch the voltage meter leads to the lower board + and - solder points. See Figure 1. Touch the red lead to positive, and the black lead to negative. On a 115V unit the motor voltage at 10 mph (16 kph) with no load should not go below 83 VDC. On a 220V unit the motor voltage at

115V

New Motor = 94 VDC
Minimum = 83 VDC (or
12% demag)

230V

New Motor = 191 VDC
Minimum = 168 VDC (or
12% demag)

10 mph (16 kph) with no load should not go below 168 VDC. If it is below 83/168 VDC respectively, the magnets are weak and the drive motor should be replaced. Press **STOP** to end the test.

7. Secure the front panel.

A. Using a 3/16" Allen wrench, secure the front panel to the frame with the four button head screws and four starwashers.

8. Secure the side rails and motor cover.

A. Snap the side rails back down into their original position.

B. Using a 3/16" Allen wrench, attach the end caps onto the sides of each side rail with two button head screws.

C. Lower the motor cover in place and attach it with the two Phillips screws.

Running Belt & Deck

After a deck has been rotated, flipped, and rotated again, the useful life of the deck has been met. Have a qualified Cybox service technician replace your old deck with a new one.

NOTE: *This procedure will cover the running deck, running belt, front roller, rear roller and drive belt.*

Tools Required

- Phillips head screwdriver
- 7/16" wrench
- 1/2" wrench
- 3/4" wrench
- 3/16" Allen wrench

1. Turn the power off.

A. Turn the main power switch in the front panel to the off (O) position. (It is labeled I/O).

B. Unplug the treadmill from the power outlet.

2. Remove the motor cover.

A. Using a Phillips head screwdriver, remove the two screws that fasten the motor cover to the frame.

B. Lift the motor cover and remove it from the treadmill.

3. Remove the side rails.

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

- A. Using a 3/16" Allen wrench, remove the two button head screws that fasten each side rail to the frame. This step will also loosen the end caps.
 - B. Grip the top edge of each side rail and firmly pull it up and outward from the treadmill.
- 4. Remove the rear roller.**
- A. Using a 3/4" wrench, remove the two rear roller bolts. Loosen each bolt evenly, making sure not to loosen either bolt too many turns before moving to the other bolt. Remove the bolts, washers, springs, and nuts and set them aside.
 - B. Lift one side of the rear roller and slide the roller out of the running belt.
- 5. Loosen the deck.**
- A. Using a 7/16" wrench, remove the nine screws, nine washers and nine belt retaining washers that hold the deck in place. See Figure 3.
 - B. Using an Allen wrench, remove the remaining screw, spacer, and belt retaining washer. Leave the deck in place at this time.

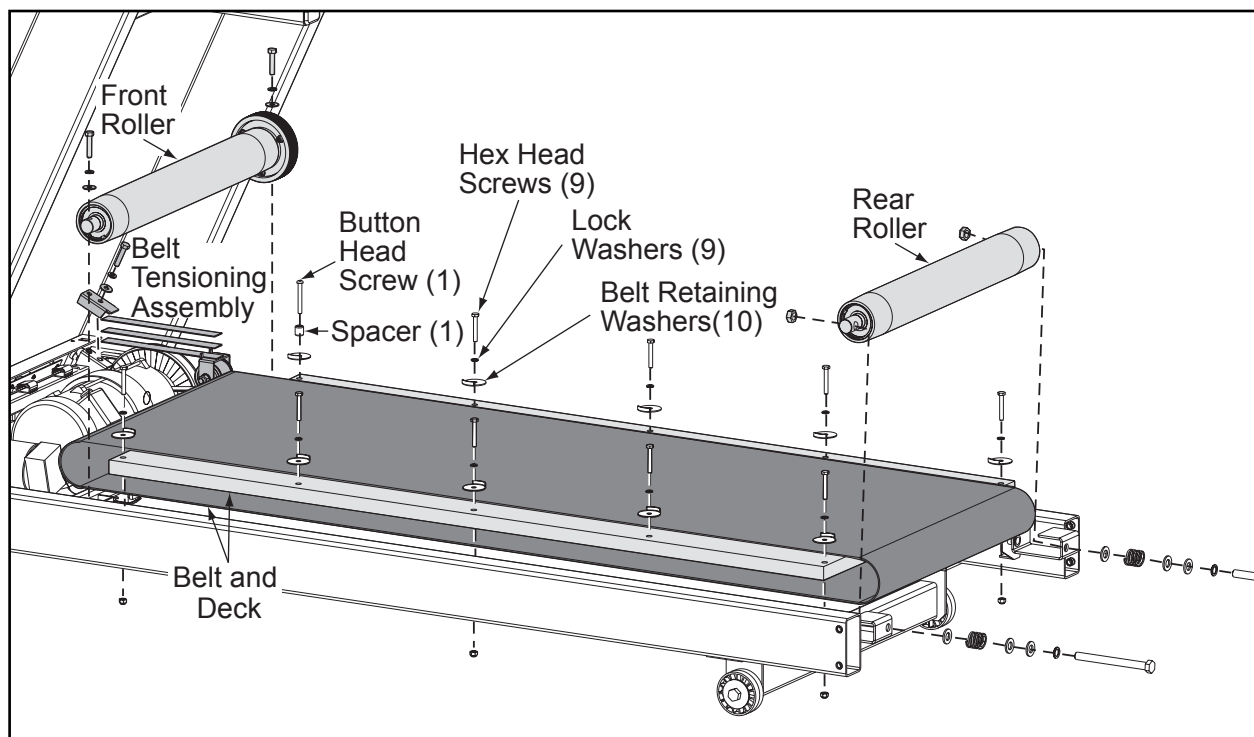


Figure 3

- 6. Loosen the drive belt.**
- A. Using a 1/2" wrench, remove the mounting bolt and two washers on top of the drive belt tensioning assembly. See Figure 3.
 - B. Remove the two steel bar springs, along with the drive belt tensioning roller.

7. Remove the front roller.

- A. Using a 1/2" wrench, remove the two screws and four washers that fasten the front roller to the front end assembly.
- B. Lift and slide the front roller out of the drive belt and running belt.

8. Remove the running deck and running belt.

- A. If you are rotating or flipping the deck make a note on the deck so you know which way it was positioned. This way, you can be sure to use all four deck positions before replacing the deck. Make the note near the edge of the deck where the bolts are so that the note will not be worn off by belt contact.
- B. Lift one side of the deck and slide it out of the running belt. The running belt is now free to remove from the treadmill.

! CAUTION: Cybex recommends using only Cybex running belts because we cannot guarantee the performance of other brands.

9. Position the running belt and running deck.

- A. Place the running belt in position around the deck.
- B. Place the deck in position without the hardware at this time.

Drive Belt

10. Position the drive belt.

- A. If you are changing the drive belt you can slip the old belt around the fly wheel and off the treadmill. Slide the new drive belt around the flywheel and on to the drive pulley. Slide the front roller into the running belt. Be sure the drive belt is around the drive pulley and the front roller before attaching the front roller. There will be some slack in the drive belt until step 12D is complete.

Front Roller

11. Attach the front roller.

- A. With the drive belt around the drive pulley and the front roller, loosely attach the two screws and four washers that fasten the front roller to the front end assembly. Tighten each of the two screws evenly. Make sure not to tighten one bolt too many turns before moving to the other bolt.

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

12. Attach the drive belt tensioning assembly.

- A. Place the drive belt tensioning roller in position under the front bracket on the drive belt tensioning assembly. See Figure 3.
- B. Place the two steel bar springs over the drive belt tensioning roller plate and under the front bracket on the drive belt tensioning assembly. Be sure springs are firmly seated against the stop under the drive belt retainer.
- C. Be sure that the pulley is aligned with the drive belt.
- D. Using a 1/2" wrench, tighten the mounting bolt and two washers while keeping the pulley aligned with the drive belt. **NOTE:** *A drive belt that is too loose may squeal and you may be able to see it slip when you walk on the running belt.*

13. Attach the running deck.

- A. Using an Allen wrench, attach the remaining screw, spacer, and belt retaining washer in the frontmost right hole.
- B. Using a 7/16" wrench, attach the nine screws, nine washers and nine belt retaining washers that hold the deck in place. See Figure 3.

Rear Roller

14. Replace the rear roller.

- A. Slide the rear roller into the running belt.
- B. Place the bolts, washers, springs, and nuts in position. Partially tighten the two bolts leaving them loose until step 15C.

15. Reinstall the side rails and end caps.

- A. Line up the side rails with the end of the frame. Place the bottom edge of each side rail under the treadmill frame and push the top edge of each side rail in place. It will snap on.
- B. Place the end cap flush with the end of the side rail and the end of the frame. Use a 3/16" Allen wrench to attach the two button head screws that fasten each end cap and side rail to the frame.
- C. Using a 3/4" wrench, tighten each rear roller bolt evenly, making sure not to loosen either bolt too many turns before moving to the other bolt. Use the small plastic tab above the bolt hole as a visual reference to tension the rear roller bolts. When tightening the rear roller bolts, look down onto the plastic tab located just above the bolt head. Make sure the entire side of the silver washer is visible and is not hidden by any portion of the tab.

16. Adjust the running belt tension and center the belt by following the instructions

Running Belt Adjustments in the Preventive Maintenance chapter. Then continue with step 17.

17. Attach the motor cover.

- A.** Lower the motor cover and in position and install the two Phillips head screws that hold it in place.

Error Codes

Cybex provides error code descriptions for your information. Cybex recommends that these errors be addressed by a qualified service technician. These codes notify you of a problem condition and errors which jeopardize safety will shut the treadmill down. The codes also help to indicate the part of the treadmill most likely to be causing the problem.

- ERROR 1: No Speed Signal at Startup
- ERROR 2: Excessive Current Draw
- ERROR 3: Loss of Speed Signal
- ERROR 50: Overspeed (stored as ERR 6)
- ERROR 70: Loss of NOVRAM Information (stored as ERR 7)

If you have a problem that interrupts an important operational area of the treadmill, you may see one of the above error codes displayed in the control panel. If an Error Code is generated during operation, the treadmill's drive motor will stop. In order to restart the treadmill, the Error Code must be cleared by cycling the power to the machine by switching the ON/OFF switch to "OFF" for five seconds and then switching it back "ON" again. Should a code reappear soon after cycling off, then on again, report the problem to your Cybex dealer, authorized Cybex service representative or directly to Cybex Technical Support.

ERROR 1: No Speed Signal at Startup

This error code usually occurs only during start-up and indicates that the computer in the control panel is not receiving any indication of motor speed.

To isolate the source of this problem, you need to determine whether the drive motor tried to start up and did rotate or whether it never came on at all.

If the drive motor (and running belt) rotates, even if only for a second or so, the error code usually indicates that the speed sensor is malfunctioning. The quick way to check this is to remove the motor cover and the front panel to witness the SPEED LED on the motor control board. If it blinks when the flywheel is rotated by hand, the problem is most likely the console cable. After that, suspect the lower board and then the display board. This signal can also be seen on a diagnostic LED of the display board.

7 Service

- Service Instruction 7-1
- Motor Brushes 7-1
- Motor Current & Voltage . . . 7-4
- Running Belt & Deck 7-7
- Drive Belt 7-9
- Front Roller 7-9
- Rear Roller 7-10
- Error Codes 7-11
- Diagnostic Tests 7-13
- Parts List 7-20
- Exploded View 7-23
- 710T Schematic 7-24

If the drive motor (and running belt) does not rotate at all, the problem is more difficult to diagnose. First, suspect the power relay and check it by going into diagnostics, C18, and press the **v** elevation button in conjunction with the **SPEED +** button. This will toggle the relay on/off. You should be able to hear the relay toggle and note as well that the value in the center window reads "1." If it reads zero, the problem is most likely the console cable.

If none of these prove to be the problem, have a qualified service technician check the wiring for wear or abrasion and also inspect the motor brushes. Any arcing, pitting or burning of the brushes, or a brush that is less than .438" (7/16"/11.13mm) indicates the need for brush replacement. The tightness of the brush cap and brush holder mount in the drive motor housing should also be checked. **NOTE:** *There are two lower board fuses which allow power to the display and to the motor drives. The upper display is not likely to light up at all if one or both of the fuses need to be replaced. Have a qualified service technician replace these only with equivalent value fuses.*

ERROR 2: EXCESSIVE CURRENT DRAW

This error code is generated by exceeding the current limit of the motor drive system for two seconds. The error is generated to help prolong the life of the treadmill and alert the owner to a potentially damaging situation. Most common occurrences of this are high belt/deck friction due to wear or contamination, a worn motor, or a breakdown of the choke. Problems in the drive motor brush area, such as worn, pitted or arcing motor brushes, a loose drive motor brush cap, or a loose drive motor brush holder can also cause this error code to be generated.

Another source of this problem could be excessive friction between the deck and belt, usually caused by a lack of routine belt/deck cleaning (see Chapter 5), or by a worn deck.

A third cause for this code could be a defective choke or a poor connection at the choke assembly.

Last, the failure of an electronic component in the motor control or loss of magnetism in the drive motor permanent magnet could also generate this error code.

ERROR 3: LOSS OF SPEED SIGNAL

This error code occurs after the treadmill has successfully started and indicates that the computer in the display control panel has lost the motor speed signal from the speed sensor. The causes for this error are similar to those listed for Error 1.

ERROR 50: OVERSPEED

This error code indicates a problem with the speed control circuitry. This error is stored as ERROR 6 but displayed as ERROR 50.

It can occur if the treadmill recognizes a discrepancy in the actual belt speed vs. the speed set at the control panel. If the actual speed of the belt is 1 mph (1.6 kph) over the set speed for 0.2 seconds or 2 mph (3.2 kph) below the set speed for 2 seconds, this error code will be displayed.

If the speed attempts to increase, it may be because of a defect in the power supply circuitry to the drive motor, the speed sensor, or the filter capacitor.

If the speed attempts to decrease, it is most often because a person is pushing on the belt. Or it may be because of a defect in the drive motor, the speed sensor, or a worn running deck.

If either of these conditions exist, call your local Cybex dealer, authorized Cybex service representative or directly to Cybex Technical Support. An authorized Cybex technician can usually detect the source of the problem with a service visit.

Error 70: LOSS OF NOVRAM INFORMATION

This error code indicates a problem with the nonvolatile random access memory (NOVRAM) contents. This chip is located on the DDM. Its contents may have become lost or destroyed. Among other data, this chip holds the accumulated miles and speed information. You can reset the NOVRAM by turning the treadmill off and then on again, but you may lose all the accumulated data. Should the problem recur, you need to replace the NOVRAM chip.

Diagnostic Tests

These tests display status information about the treadmill to help you isolate the cause of a problem or to monitor accumulated usage data. Some of the tests also give quantitative information (such as motor current readings and elevation encoder counts) to help you further evaluate the machine's condition.

- C1: PROGRAM REVISION LEVEL
- C2: ACTUAL SPEED
- C3: CURRENT DRAW
- C4: LED TEST
- C5: OVERLAY TEST
- C6: CSAFE PORT CHECK
- C7: TONE GENERATOR CHECK
- C8: SPEED SENSOR COUNT
- C9: INCLINE SENSOR
- C10: TOTAL MILEAGE
- C11: TOTAL HOURS
- C12: ERROR LOG
- C13: NUMBER OF STARTS
- C14: PROGRAM LOCKOUT
- C15: TIME LIMIT
- C16: SPEED LIMIT
- C17: PAUSE TIME

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

C18: POWER RELAY TESTS

C19: SERVICE REMINDERS

NOTE: Press **STOP** to exit *Diagnostic Test Mode*.

You can perform any of the service diagnostic tests from any treadmill state, that is, before, during, or after a program (manual or preset). Since C2, C3, C8 and C9 are dynamic tests, you will usually want to enter the *Diagnostic Test Mode* while the treadmill is running.

To run a service diagnostic test, press and hold **SCAN/SAVE** and then press **–**. You will see the message “DIAGNOSTIC TESTS . . . PRESS **v** OR **^** TO SELECT.”

The message scrolls across the display from the far right to the far left. Then, three seconds later, the message repeats. This display sequence continues until you press **^** or **v**. If you do not press either key for five minutes, the treadmill turns off the display.

If you press **^**, the treadmill displays the first diagnostic test menu choice: “C1: PROGRAM REVISION LEVEL.” If you press **^** again, the treadmill advances to the second choice: “C2: ACTUAL SPEED,” and so on. Similarly, if you first press **v** the treadmill displays the diagnostic test menu choices in reverse order, starting with the last choice:

“C18: SERVICE REMINDERS” and moving backward through the menu (C19, C18, etc.).

When you have selected a test, press **START/ENTER** to begin. If you do not press **START/ENTER** within five minutes, the treadmill returns to the *Dormant Mode*.

After a diagnostic test finishes, press the **START/ENTER** key to return to the diagnostic test menu choices.

To exit a diagnostic test or the diagnostic test menu, press **STOP** and the treadmill returns to the *Dormant Mode*.

C1: PROGRAM REVISION LEVEL

This test displays configuration information for the main program chip in the control panel. The test displays the treadmill model number for which the program chip is intended, followed by the revision level of the main program. The control panel displays the test results until you press **START/ENTER** which returns the display to the test menu choices. For example:

600 series r 2.01

Also active in this diagnostic window is the test for the heart rate. The right decimal point in the % GRADE window (the left window) will pulse with each pulse received. Note that the usable range of the Polar® Transmitter is about 30° from the console cross rail where the pickup sensor is embedded.

C2: ACTUAL SPEED

This test displays the actual speed of the drive motor in miles per hour (mph) or kilometers per hour (kph) in hundredths. For example:

5.02 MPH

The control panel displays the test results until you press **START/ENTER**.

C3: CURRENT DRAW

This test displays the current draw of the treadmill in amperes. For example:

12.6 AMP

The control panel displays the test results until you press **START/ENTER**.

C4: LED TEST

This test illuminates each column of LEDs on the control panel independently, in both the red and green color.

The test begins by displaying the red color for the first vertical column of LEDs on the far left of the display. The test moves from left to right, one column at a time. After the test displays the far right column in the red color, it illuminates that same column in the green color and moves back across the display from right to left in the green mode.

The control panel repeats this sequence until you press **START/ENTER**.

Pressing combinations of the speed and elevation keys produces bands of color. Press - or + to verify red, then press v or ^ to verify green. Press - (or +) and v (or ^) simultaneously to verify the amber display. With C4, you can easily locate any LED that may not be working properly. A trained technician can then disassemble and replace the block of 5 x 7 LEDs that contains the LED that does not illuminate.

C5: OVERLAY TEST

This test generates a tone signal when you press a key on the control panel. The test helps you isolate a defective key.

When you press **START/ENTER** to begin this test the console panel displays the message "**START.**" Pressing any key generates a tone signal. A tone verifies that the key is operating properly.

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

NOTE: Press the **START/ENTER** key last, because although it emits a tone, it will also cause you to exit the C5 test and return to the diagnostic menu. If you press **STOP**, it will exit from the Diagnostic Test Mode.

If you locate a key that is not functioning properly, a trained Cybox service technician can disassemble the control panel and replace the overlay switch membrane.

C6: CSAFE PORT CHECK

This test checks the status of the CSAFE port on the back of the console. CSAFE is the industry standard for connecting to fitness equipment. The port is tested at the factory, but the status can be checked at any time. The test will indicate one of four states:

CSAFE OK Communication has been established

OPEN No comm. or open port

LOOP OK Factory test using a test plug

NO POWER Factory test using a test plug

C7: TONE GENERATOR CHECK

This test checks the tone generator on the control panel. With C7, you can determine whether the tone generator needs to be replaced.

When you press **START/ENTER** to begin this test, the control panel displays the message "**START.**"

The test sends seven electrical signals to the tone generator and you should hear seven audible tones in return. A defective tone generator will not produce any tones.

Press **START/ENTER** to end this test and return to the diagnostic test menu.

C8: SPEED SENSOR COUNT

This test displays the actual speed sensor's count of gear teeth. The speed sensor gear is mounted on the drive motor shaft.

- At 1 mph the count is approximately 99.
- At 2 mph the count is approximately 199.
- At 3 mph the count is approximately 298.
- At 4 mph the count is approximately 398.
- At 5 mph the count is approximately 497.
- At 6 mph the count is approximately 597.
- At 7 mph the count is approximately 696.
- At 8 mph the count is approximately 795.
- At 9 mph the count is approximately 895.
- At 10 mph the count is approximately 995.

The control panel displays the test results until you press **START/ENTER**.

An erratic or low count can indicate a problem with the speed pickup or the target decal on the flywheel. Inspect the flywheel decal for nicks, dirt, scratches, etc. and replace if any defects are found. If the speed pickup is loose, adjust it to within 1/4" of the flywheel and tighten securely.

C9: INCLINE SENSOR

This test allows you to elevate the treadmill up and down in any increment to evaluate the elevation position sensor. The test displays the % grade closest to the present position in the left window, and the actual elevation encoder count in the center window. Each % grade is equivalent to 88 counts of the encoder. Also, this test can be used to test the elevation zero switch, which activates as the treadmill passes through 0% grade, causing the center encoder count to go negative.

In this test window, the treadmill can be calibrated by holding the **v** key and the **+** key simultaneously.

C10: TOTAL MILEAGE

This test displays the actual accumulated total mileage, to date, in miles. The control panel displays the test results until you press **START/ENTER**.

C11: TOTAL HOURS

This test displays the actual accumulated total time, to date, in hours. The control panel displays the test results until you press **START/ENTER**.

C12: ERROR LOG

This test displays the last five error codes the treadmill has recorded. The information can be reset by pressing **+** or **-**. The control panel displays the test results until you press **START/ENTER**.

NOTE: Pressing the **SCAN/SAVE** key in C12 will clear any active maintenance prompts.

C13: NUMBER OF STARTS

This test logs the number of machine start-ups. The control panel displays the test results until you press **START/ENTER**.

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

C14: PGM LOCKOUT

This mode allows the programs to be turned off, for manual use only.

Press the **+** key to turn the lockout feature on, disabling all programs. Press the **-** key to turn the lockout feature off, enabling all programs. Press **START/ENTER** to set your selection.

C15: TIME LIMIT

Use the **SCAN/SAVE** key to toggle the time limit feature off and on, as shown on the display. When the time limit number of minutes (5 to 95 in 5-minute increments) is displayed, it may be incremented with **+** or **^** key or decremented with **-** or **v** key.

The control panel displays the test results until you press **START/ENTER**.

***NOTE:** When a time limit is set, the display scrolls "MAX WORKOUT XX Min", when a workout is selected.*

C16: SPEED LIMIT

Use the **+** or **-** key to increment the speed limit from 1.1 to 10.0 mph (1.8 to 16 kph). At 10 mph (16 kph) it has no effect. At lower values it limits the speed in both the manual and program modes. Use **START/ENTER** to confirm and save.

C17: PAUSE TIME

Using the **+** and **-** keys, set the pause time to 0:10 Min or 5:00 Min, as shown on the display. Your selection determines the time that a workout may be delayed after the **STOP** key is pressed. If the workout is not re-accessed during this time period the workout terminates automatically.

C18: POWER RELAY TEST

This test allows you to test (activate) the power relay on the lower electronics PCB. Pressing the **v** elevation button in conjunction with the **SPEED +** button will toggle the relay on/off. You should be able to hear the relay toggle and note as well that the value in the right window should read "1." If the number displayed in the right control panel window is "1," then the power relay control wiring is OK. If the value displayed is "0," then the relay can not be controlled by the display.

C19: SERVICE REMINDERS

Service reminders occur every 5000 miles to bring your attention to the regular scheduled maintenance which should be performed for maximum treadmill life and performance. Once in this screen, you have the option to clear a service reminder and to turn this feature on or off. Use the **- / +** keys to toggle the displayed message. If a Service Reminder is active, this allows you to clear it. If no Service Reminders are active, you have the option of toggling the feature on and off. Press **START/ENTER** to accept any changes and exit the screen.

Press **STOP** to exit and return to the mode you were in before entering the diagnostic tests.

NOTE: *If you were in the middle of a program before entering the Diagnostic Test Mode, you will be returned to the exact spot in the program where you left off. The speed, elevation, and time will all return to where they were prior to entering the Diagnostic Test Mode. You will not lose any information and the elapsed time will not have changed.*

7 Service

Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

Parts List

ITEM NO.	QTY.	PART NO.	DESCRIPTION	ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	SK-15487	Frame Assembly Kit <P12	45	1	HS-10435	Bolt, Tap 3-8-16 x 3" Hex Head
1	1	AF-14105	Frame Assembly, Stable Flex	46	1	HW-11580	Washer, USS 3-8 Zinc
2	1	SK-15414	Rail, Side Right	47	1	HB-14015	Belt Tensioner Pulley
3	1	SK-15415	Rail, Side Left	48	1	HW-00361	Washer Lock EX 3-8 Zinc
4	1	PL-12978	Cover, Right End Cap (Or W/Bracket, AX-14599)	49	1	HN-00199	Nut, 3-8-16 Hex Head STL Zinc
4	1	AX-14599	Cover, Right End Cap With Bracket	50	1	FM-14145	Tensioner
5	1	PL-12977	Cover, Left End Cap (Or With Bracket, AX-14598)	51	1	BD-10981	Belt, Running 20.75 x 127.50
5	1	AX-14599	Cover, Right End Cap With Bracket	52	1	HS-14202	Bolt, 1-4-28 x .75 Hex Head Zinc
6	2	AF-13462	Bracket, End Cap	53	3	HW-10867	Washer, Fender 1-4 x 1.0 x .051
7	4	HS-11328	Screw, SEMS 10-32 x 0.38 PNHD Phillips INT	54	1	HX-11593	Key, ANSI Square, 3/16 x 1 3/16"
8	20	HS-00163	Bolt, 5-16-18 x 0.75 SCHED BTN, (Console and Support)	55	1	AX-14430	Flywheel With Speed Sensor Disc
9	16	HW-15401	Washer	56	1	DE-14260	Speed Sensor Disc Decal For Flywheel
10	2	HS-13769	Bolt, 1/2-13 x 2.5" B-Zinc, Rear Foot Mount	57	1	FS-14140	Speed Sensor Bracket
11	2	HW-11427	Washer, .593 x 2.0 OD Zinc, Rear Foot Mount	58	2	HS-11976	Screw, Speed Sensor
12	2	FM-14258	Tube Wheel Bearing	59	1	AX-14602	Speed Sensor With Cable
13	2	PL-14167	Wheel 3.0" O.D. x 1.0" Wide, Rear Foot	60	1	HN-10717	KEPS 4-40 Hex Head Zinc
14	2	AF-14903	U Channel	61	1	HW-10772	Washer, Flat NO. 4
15	2	HX-15111	Tape, Double Sided, (For U Channel)	62	1	HS-00156	Screw, 4-40 x 0.62 PNHD Phillips
16	2	HX-14909	Rubber Mount, Stableflex 60 lbs. 1.0" Ht	63	1	MR-14010	Motor, 2.5 HP, 180V
17	9	HN-10001	Nut, Lock 1-4-20 Ring Nylon	63	1	MR-14009	Motor, 2.5 HP, 90
18	2	HX-14908	Rubber Mounting, Stableflex 1.0" Ht (Front)	64	2	PD-14471	Pad, Isolation 1.40 x 5.25 x 5mm
19	1	ET-14366	Terminal Ground Tab	65	2	PL-14120	Pad, Vibration, Drive Motor
20	1	HS-12318	Screw, Type F 6-32 x .50 PHPNHD	66	1	FS-14479	Spacer, Motor Bolt
21	9	HN-11925	KEPS 10-32 Hex Head STL Zinc	67	1	PD-14470	Pad, Isolator 2.0 x 8.0 x 5-16
22	1	AX-15037	Choke/Conn. Kit, 230V	68	1	AF-14148	Drive Motor Strap
22	1	AX-14929	Choke/Conn. Kit, 115V	69	1	FM-14086	Pin, Motor Strap
23	2	AF-14414	Transport Wheel, Single	70	1	AF-14212	Gear Rack, Left, With Slot For Limit Switch
24	2	HS-00261	Bolt, 1/2-13 x 5.5", Hex, Rear Roller Adjusting	71	1	AF-14213	Gear Rack, Right
25	2	HB-00188	Thrust Bearing 1-2" NO. TB812	72	2	PL-14121	Block, Elevation Guide
26	6	HW-10028	Washer, B 1-2 Narrow Zinc	73	2	PL-14122	Plate, Elevation Guide
27	2	HX-11049	Spring, 1" O.D. Rear Roller Tensioning	74	1	AF-14099	Elevation Motor Shaft Extension
28	1	AL-10975	Roller, Rear	75	2	GR-14189	Gear, 12 Tooth
29	2	HN-10029	Nut, 1/2-13, Zinc, Rear Foot Mounting	76	2	HX-11576	Key Woodruff ANSI 404 1-8 x 1-2
30	3	HW-00590	Bushing, 1/2" Nylon, Rear Roller Bolt	77	6	HS-00370	Set Screw 1-4-20 x 1-4"
31	2	HX-13771	Ring Retainer 5-8" .579 FR.ID	78	2	AF-14097	Elevation Frame
32	9	HS-12295	Bolt, 1/4-20 x 1.75" Hex Head, Deck Mounting	79	1	AW-14457	Limit Switch Assembly w/Bracket and Cable
33	13	HW-00180	Washer, 1/4" Lock, Deck Mounting	80	1	HN-10003	Nut, For Motor Strap
34	10	HX-14956	Disk Guide, Deck Edge	81	1	AF-14161	Bracket, For Tensioner
35	1	FM-14960	Flex Deck Indicator	82	1	SK-16230	Elevation Motor 230V
36	1	HS-14969	Screw, (For Flex Deck)	82	1	SK-15161	Elevation Motor 115V
37	1	BD-14072	Belt, Drive, Poly - V, 280J10	83	3	HS-11485	Screw, 10-32 x 0.38 Hex Head Zinc
38	1	AL-10980	Front Roller	84	2	HS-12125	Bolt, 5-16-18 x 2.75 Hex Head GR5 ZN
39	3	HS-13759	Screw, Tap 5-16-18 x 1.50 Hex Head	85	2	HS-00194	Bolt, Hex Head .312-18 x 1.75"
40	3	HW-00165	Washer, Lock EX 5-16 Zinc	86	8	HS-14255	Screw, 5-16-18 x 2.0 SCHED Steel
41	4	HW-00189	Washer, Flat, 5/16	87	2	HX-14416	Clip, Wire Latching, U Shaped
42	13	HN-11136	Nut, 5/16-18", Hex Head, KEPS	88	1	AF-14030	Plate, Front Panel, Aluminum
43	1	HS-00273	Bolt Hex Head. 5-16-18 x 1"	89	4	HX-14416	Clip, Wire Latching, Grey Plastic
44	2	FM-14459	Spring Plate	90	1	PL-13000	Cover, Motor
				91	2	HS-00700	Screw, Motor Cover
				92	1	DE-15297	Decal, Console Cable Exit 115V/230V

Continued on next page

ITEM NO.	QTY.	PART NO.	DESCRIPTION
93	1	AF-14108	Upright, Right
94	1	AF-14107	Upright, Left
95	1	FT-14057	Console Crossrail
96	1	AF-15623	Front Panel
97	1	SK-15701	Lower Board Kit 230V
97	1	SK-15700	Lower Board Kit 115V
98	10	HS-11326	Screw (Lower Board Mount)
99	5	HN-12959	Nut, Jam 5-16-18 Hex Head Zinc
100	1	DE-10288	Label, Belt Caution, Grey
101	1	DE-14230	Label, 220V
101	1	DE-13906	Label, 115V
102	1	SW-10523	On/Off Switch
103	1	EH-12208	Receptacle, Power Inlet, 20 Amp
104	6	HS-00985	Screw, Type B 8-18 x 0.38 SLFTP
105	1	EH-13905	Clip, Wire, 1/2" Heavy Duty
106	1	HS-11977	Screw
107	1	FS-14898	Cover, Rear Console
108	8	HS-14391	Screw 6-32 x .38 PNHD Phillips SEM
109	1	PL-13507	Console Front
110	1	DE-13581	Label, Console Set 710T
111	1	DE-15384	Decal, Console 710T
112	1	AX-14805	Console Window for 710T
113	1	SK-15727	Keypad 710T
114	2	HX-10941	Grip, Handrails
115	2	HX-10942	Plug, Handrail End
116	2	HP-00181	Roll Pin 1/8 x 1" (For Handrail End Plug)
117	1	AF-13175	Handrail Assy., Right
118	1	AF-13174	Handrail Assy., Left
119	4	HS-11139	Screw, SEMS 10-32 x 1.25 PNHD
120	2	HW-13762	Washer
121	2	FS-13808	Grounding Clip, Anti-Static
122	2	HS-11195	Screw, 4-40 x 0.50 PNHD Phillips
123	1	EC-15052	PCB Assy. Heart Rate Monitor (Salutron)
124	1	AF-15141	Overlay Plates 710T
125	15	HS-11894	Screw, SEMS 6-32 x 0.25 PNHD Phillips INT
126	8	HW-13656	Washer Flat .187 ID x .875 OD x .06
127	1	AD-14880	C-Safe Interface Board
128	2	HX-10613	Dust Ring
129	2	PL-14920	Handgrip, Lower Contact Heart Rate
130	2	PL-14919	Handgrip, Upper Contact Heart Rate
131	8	HS-10716	Screw, 4-40 x 0.38 PNHD Phillips
132	4	HN-15130	Nut, Lock 5-16-18 NTE Series
133	2	HN-11585	Nut, 6-32 Nylok Hex Head Steel Zinc
134	1	EH-13468	Clip, Console
135	2	HS-11140	Screw, SEMS 6-32 x 0.38 PNHD Phillips
136	1	SK-15122	Kit, Crossrail With Polar and Contact Heart Rate
137	1	AX-14429	Kit, Crossrail With Polar Heart Rate Only
138	1	DE-14486	Serial Number
139	1	DK-10953	Deck, Running
NS	1	EC-15153	E-Prom, V3.07, 710T 230V
NS	1	EC-15152	E-Prom, V3.07, 710T 115V

Continued on next page


7 Service


Service Instruction	7-1
Motor Brushes	7-1
Motor Current & Voltage	7-4
Running Belt & Deck	7-7
Drive Belt	7-9
Front Roller	7-9
Rear Roller	7-10
Error Codes	7-11
Diagnostic Tests	7-13
Parts List	7-20
Exploded View	7-23
710T Schematic	7-24

Cybex 700T Treadmill Owner's Manual

ITEM NO.	QTY.	PART NO.	DESCRIPTION
NS	1	AD-14913G0	Control PCB DMDIII, 710T (Without E-prom) >Q08-16174XXX
NS	1	AD-13551G0	Control PCB, 710T (Without E-prom) <Q08-16174XXX)
NS	1	HX-13607	Mount HR Block
NS	1	AX-14429	Grip, Crossrail, For Contact HR, Kit
NS	1	EH-00472	Wire Tie TY-23M
NS	1	SK-15892	Brush Kit, 230V 50Hz (Includes Two Brushes)
NS	1	SK-15891	Brush Kit, 115V 60Hz (Includes Two Brushes)
NS	1	EC-15153	E-Prom, V3.07, 710T 230V >Q09
NS	1	EC-15152	E-Prom, V3.07, 710T 115V >Q09
NS	1	EC-15127	E-Prom, V3.15, 710T 230V (C-Safe) Brakeless >P09, <Q08
NS	1	EC-15126	E-Prom, V3.15, 710T 115V (C-Safe) Brakeless >P09, <Q08
NS	1	EC-15052	PCB Assy. Heart Rate Monitor (Salutron)
NS	1	EC-14468-4	E-Prom, V2.18, 645CR/710T, 230V <P09
NS	1	EC-14468	E-Prom, V1.11, 645CR/710T, 115V <P09
NS	1	LT-14464	Owner's Manual, 710T
NS	1	EF-14340	Fuse, 15 Amp Slo-Blo, 220V (On Lower Board)
NS	1	EF-14339	Fuse, 5 Amp, Elevation, 115V & 220V (On Lower Board)
NS	1	WR-13966	Cord, Power, 12 ft., 230V, 60Hz, Right Angle
NS	1	WR-13965	Cord, Power, 12 ft., 220V, 50Hz, Right Angle, International, Round Prongs
NS	1	WR-13964	Cord, Power, 12 ft., 115V, Right Angle
NS	1	EF-12367	Fuse, 20 Amp Slo-Blo 115V
NS	1	FM-11428	Insert, Alum, Rear Foot Mounting
NS	1	EH-10637	Strain Relief
NS	1	HX-10300-2	Brush Cap, Drive Motor
NS	1	EH-00986	Tie Wire T B TYB-25M
NS	1	EH-00670	Nut, Yellow Wire, #74-B
NS	1	EH-00472	Wire Tie TY-23M

NS = Not Shown

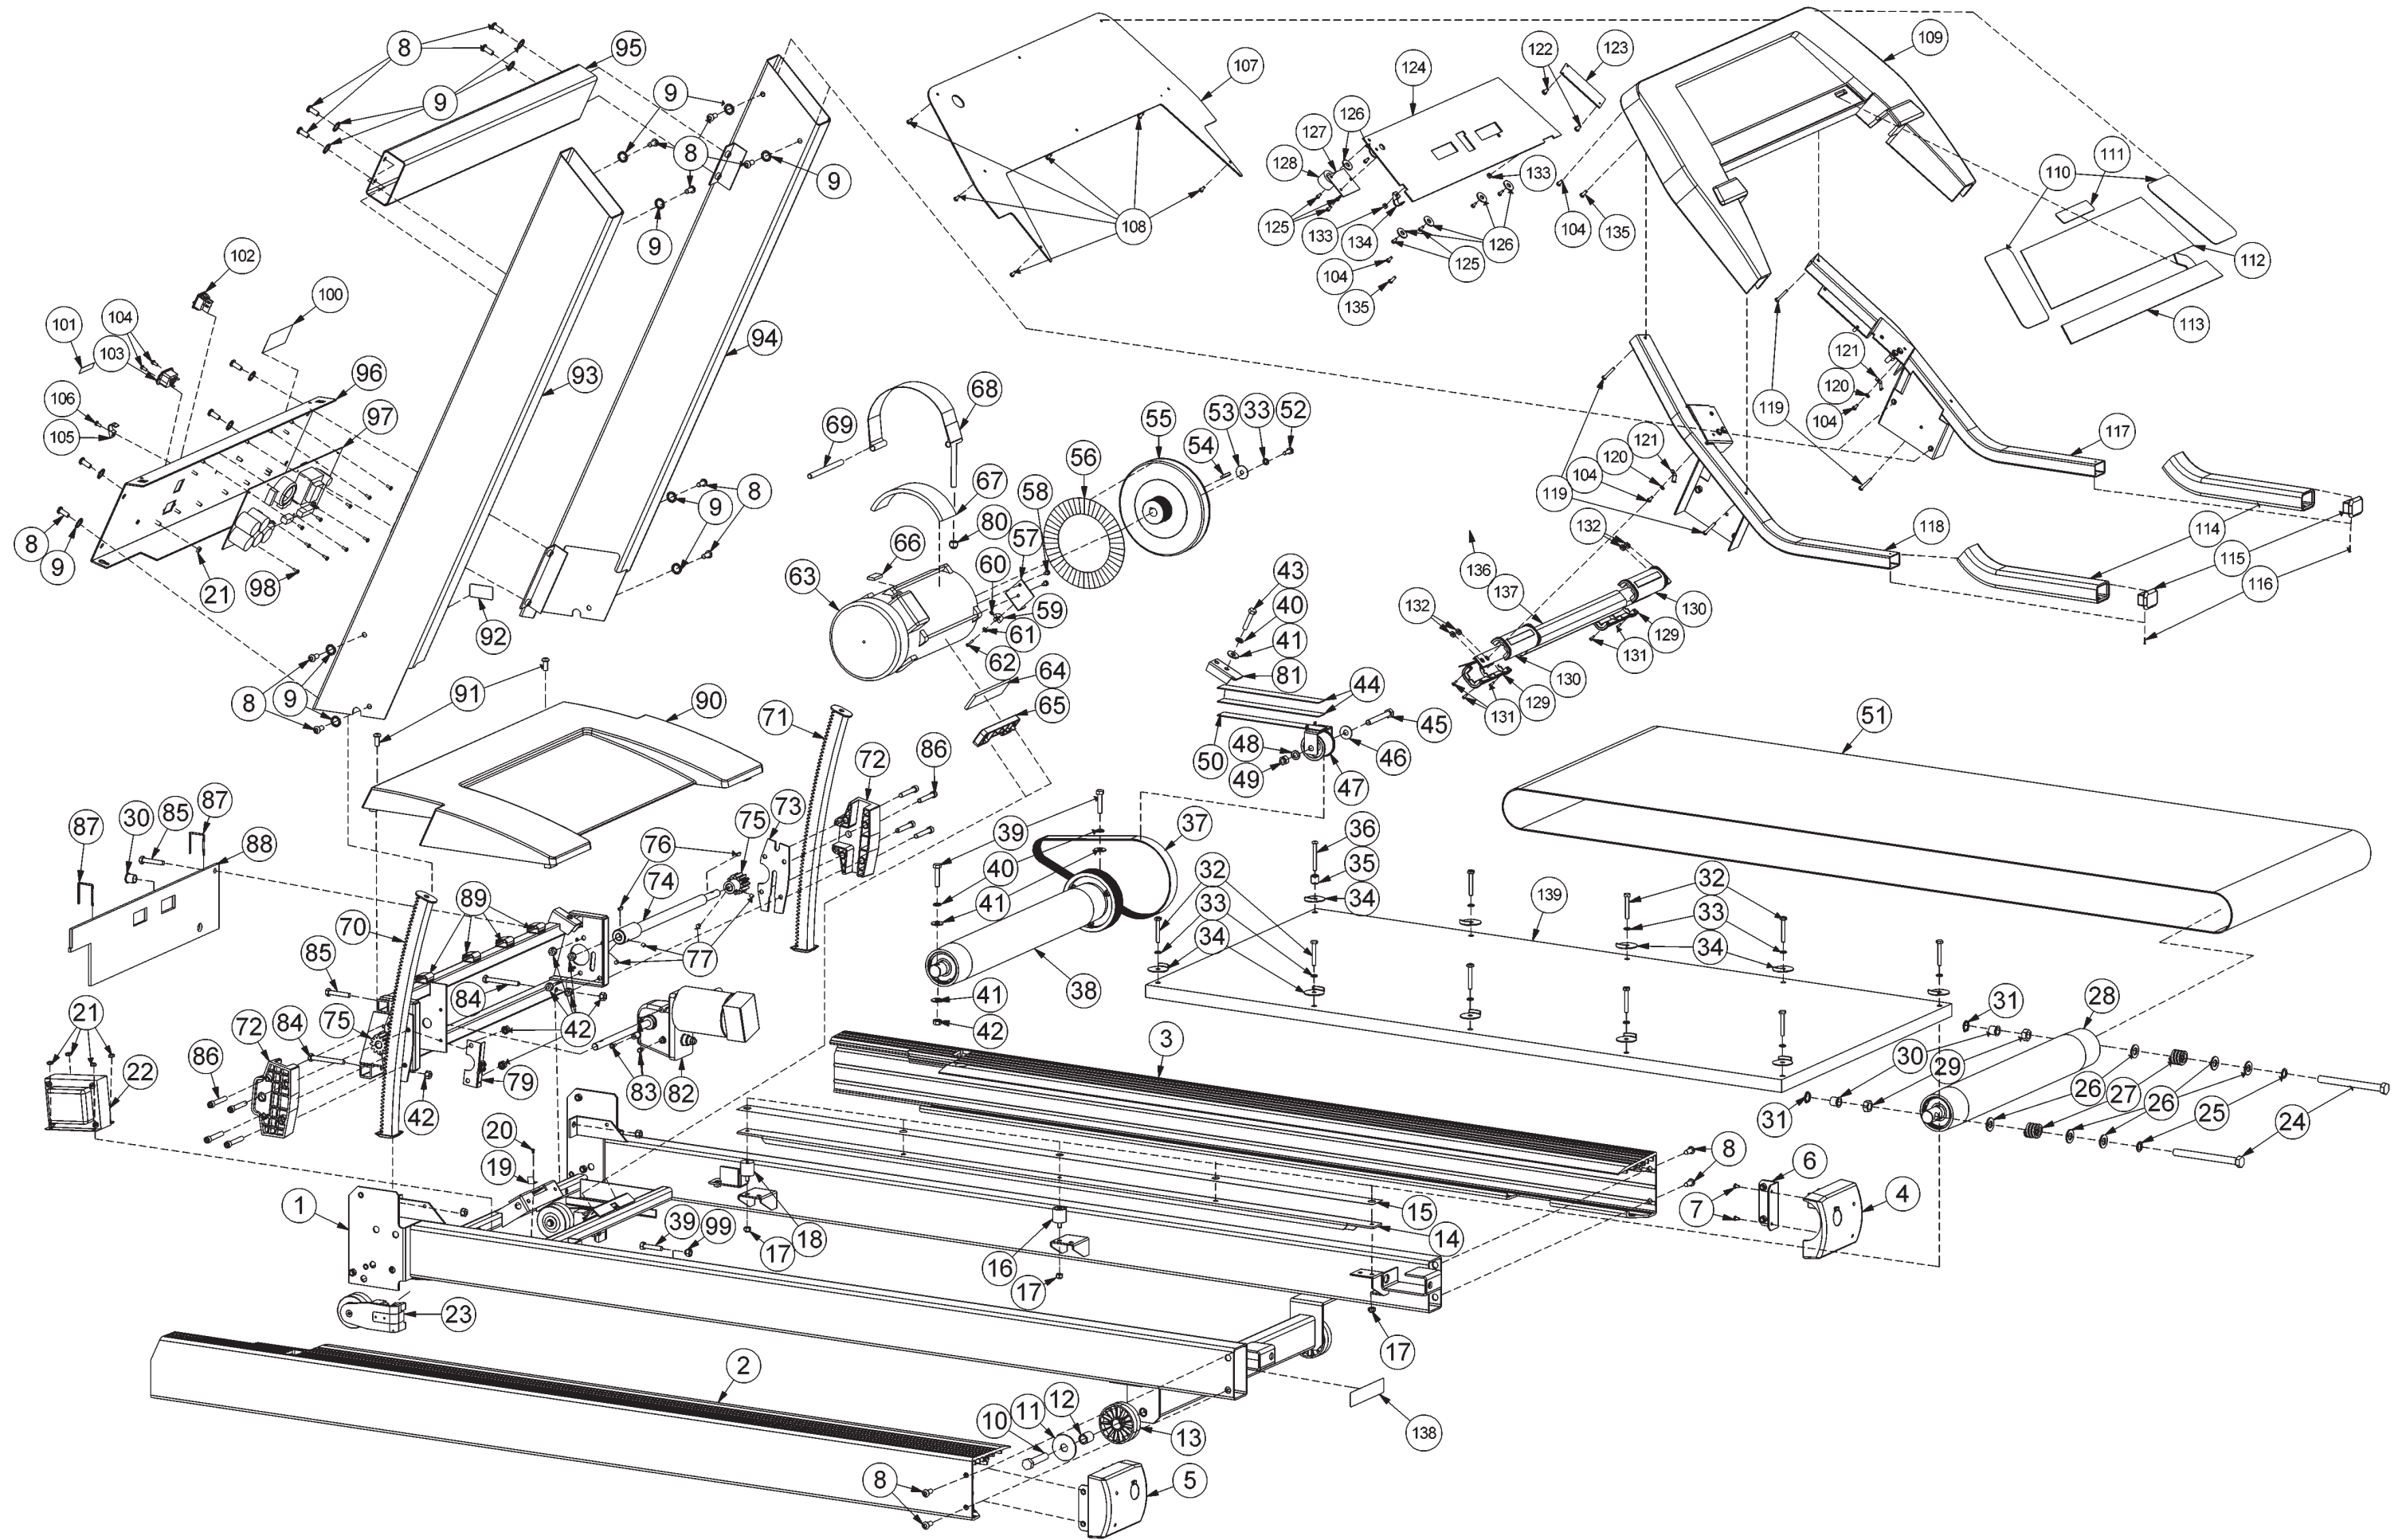

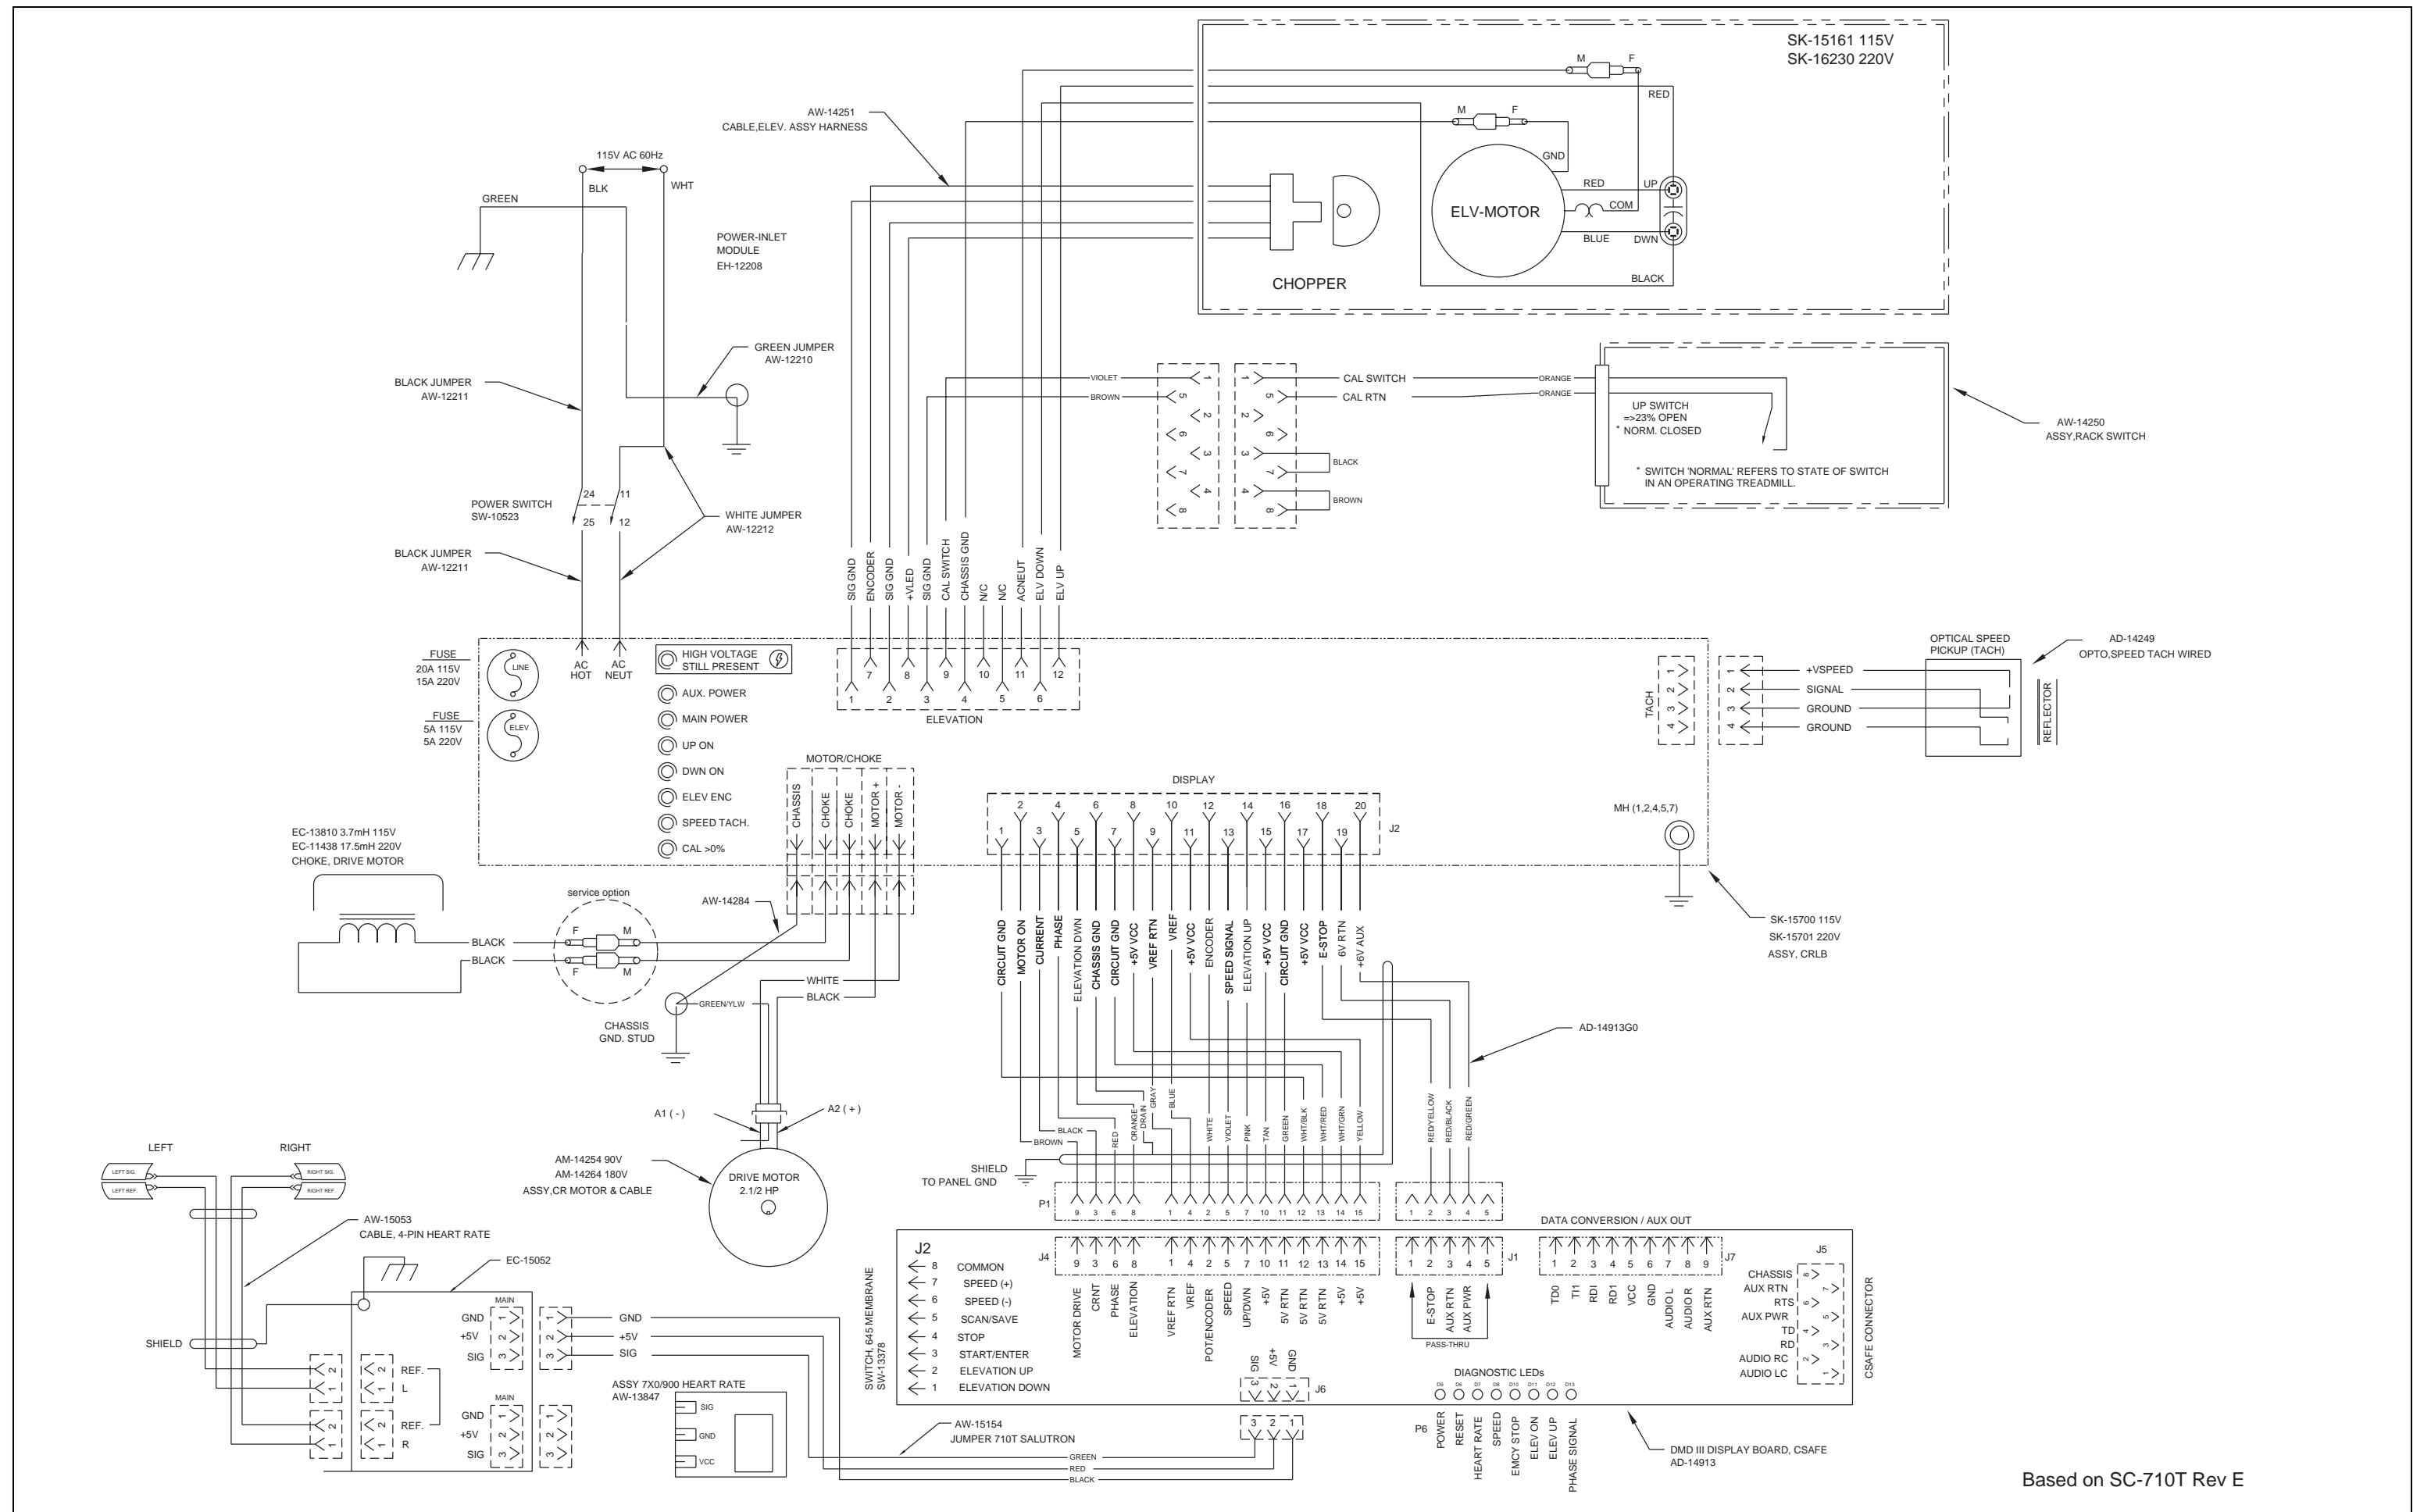

Based on SC-710T Rev E



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>