


FHS-A7015A40/FHS-A7015B40



Application:

- Intel Socket 478 Prescott FMB1.5

Thermal & Mechanical Specification:

- Thermal resistance: 0.28°C/W (ref.)
- Heatsink Weight: 370 g (ref.)
- Clipping Force: 32.0 Kgf (ref.)

Component Specification:

• Heat Sink

Type: Thermal Shrink

Material: Fin-Aluminum 6063 or Equivalent.
Core-Copper C1100 or Equivalent.
Dimension: 93.5 x 68.5 x 41.2 mm

• Thermal interface material

Material: Dow Corning SC102 or Equivalent.

• Fan (70 x 70 x 15 mm)

Rated Voltage: 12 V

Life Time:

two ball bearing 70000 hrs

one ball one sleeve bearing 40000 hrs

Connector:

a.. Lead wire: UL 1007 AWG#24

pin 1: black wire-----(-)

pin 2: red wire-----(+)


pin 3: blue wire----- (F00)

b. Housing: Molex 2695-03 22-01-3037 or equivalent


c. Terminal: Molex 2759t 08-50-0113 or equivalent

* All readings are typical values at rated voltage.

* Specifications are subject to change without notice.

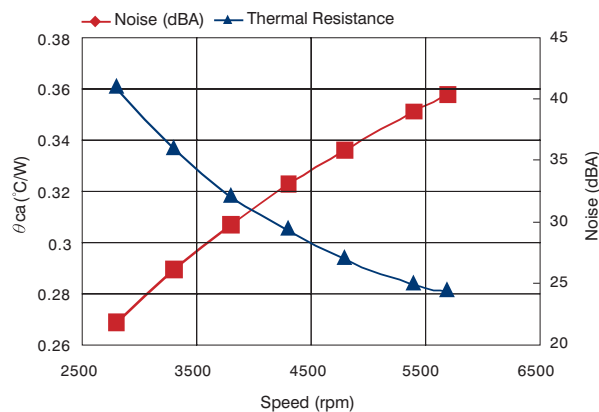

FHS-A7015A41/FHS-A7015B41



Application:

- AMD Socket 754 K8 (Athlon 64)

Thermal & Mechanical Specification:

- Thermal resistance: 0.26°C/W (ref.)
- Heatsink Weight: 350 g (ref.)
- Clipping Force: 32.0 Kgf (ref.)

Component Specification:

• Heat Sink

Type: Soldering Heat Sink
 Material: Fin-Aluminum 6063 or Equivalent.
 Base- Copper C1100
 Dimension: 77 x 68.5 x 41.2 mm

• Thermal interface material

Material: Dow Corning SC102 or Equivalent.

• Fan (70 x 70 x 15 mm)


Life Time:

- one ball one sleeve bearing 40000 hrs
- two ball bearing 70000 hrs


Connector:

- Lead wire: UL 1007 AWG#24
 - pin 1: black wire-----(-)
 - pin 2: red wire-----(+)
 - pin 3: blue wire----- (F00)
- Housing: Molex 2695-03 22-01-3037 or equivalent
- Terminal: Molex 2759t 08-50-0113 or equivalent

- * All readings are typical values at rated voltage.
- * Specifications are subject to change without notice.

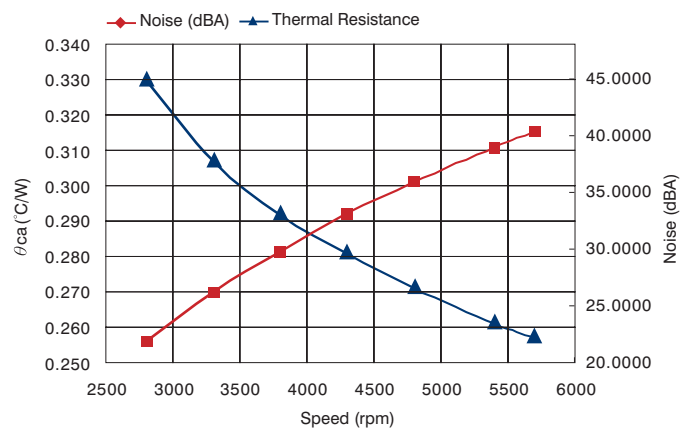

FHS-A7015A42/FHS-A7015B42



Application:


- AMD Socket 754 K8 (Athlon 64)

Thermal & Mechanical Specification:

- Thermal resistance: 0.28°C/W (ref.)
- Heatsink Weight: 290 g (ref.)
- Clipping Force: 32.0 Kgf (ref.)


Component Specification:

- **Heat sink**
 - Type: Extrusion
 - Material: Aluminum 6063 or Equivalent.
 - Dimension: 77 x 68.5 x 41.2 mm
- **Thermal interface material**
 - Material: Dow Corning SC102 or Equivalent.
- **Fan (70 x 70 x 15 mm)**
 - Life Time:
 - one ball one sleeve bearing 40000 hrs
 - two ball bearing 70000 hrs
 - Connector:
 - a..Lead wire: UL 1007 AWG#24
 - pin 1: black wire-----(-)
 - pin 2: red wire-----(+)
 - pin 3: blue wire----- (F00)
 - b. Housing: Molex 2695-03 22-01-3037 or equivalent
 - c. Terminal: Molex 2759t 08-50-0113 or equivalent

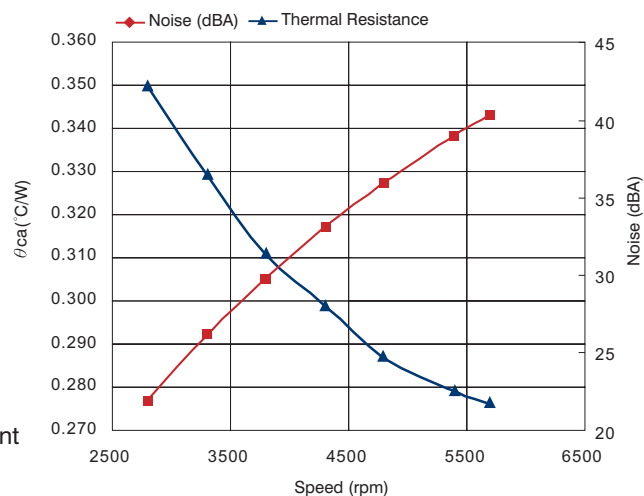

- * All readings are typical values at rated voltage.
- * Specifications are subject to change without notice.

FHS-A7025A04/FHS-A7025B04



**Tool-Free
Clip**



Application:

- Intel Socket 478 Prescott FMB1.5

Thermal & Mechanical Specification:

- Thermal resistance: 0.28°C/W (ref.)
- Heatsink Weight: 350 g (ref.)
- Clipping Force: 32.0 Kg (ref.)

Component Specification:

• Heat Sink

Type: Soldering Heat Sink
Material: Fin-Aluminum 6063 or Equivalent.
Base-Copper C1100 or Equivalent.
Dimension: 93.5 x 68.5 x 41.2 mm

• Thermal interface material

Material: Dow Corning SC102 or Equivalent.


• Fan (70 x 70 x 25 mm)

Rated Voltage: 12 V
Life Time:
one ball one sleeve bearing 40000 hrs
two ball bearing 70000 hrs


Connector:

- Lead wire: UL 1007 AWG#24
 - pin 1: black wire-----(-)
 - pin 2: red wire-----(+)
 - pin 3: blue wire----- (F00)
- Housing: Molex 2695-03 22-01-3037 or equivalent
- Terminal: Molex 2759t 08-50-0113 or equivalent

* All readings are typical values at rated voltage.
* Specifications are subject to change without notice.

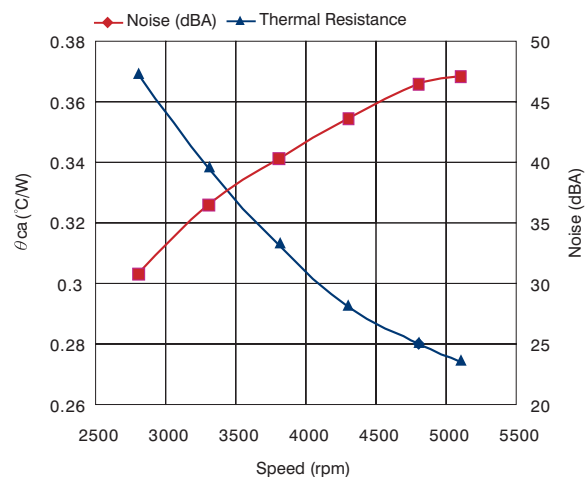

FHS-A9025A00



Application:

- Intel Socket 775 Prescott FMB2.0

Thermal & Mechanical Specification:

- Thermal resistance: 0.25°C/W (ref.)
- Heatsink Weight: 380 g (ref.)
- Clipping Force: 20.0 Kg (ref.)

Component Specification:

• Heat Sink

Type: Thermal Shrink

Material: Fin-Aluminum 6063 or Equivalent.
Core-Copper C1100 or Equivalent.
Dimension: 90 x 90 x 32 mm

• Thermal interface material

Material: Dow Corning SC102 or Equivalent.

• Fan (90 x 90 x 25 mm)

Rated Voltage: 12 V

Life Time:

one ball one sleeve bearing 40000 hrs

Connector:

a..Lead wire: UL 1007 AWG#24

pin 1: black wire-----(-)

pin 2: red wire-----(+)


pin 3: blue wire----- (F00)

b. Housing: WIESON 2510C888-001 or equivalent

c. Terminal: WIESON 2511-T1 or equivalent

* All readings are typical values at rated voltage.

* Specifications are subject to change without notice.

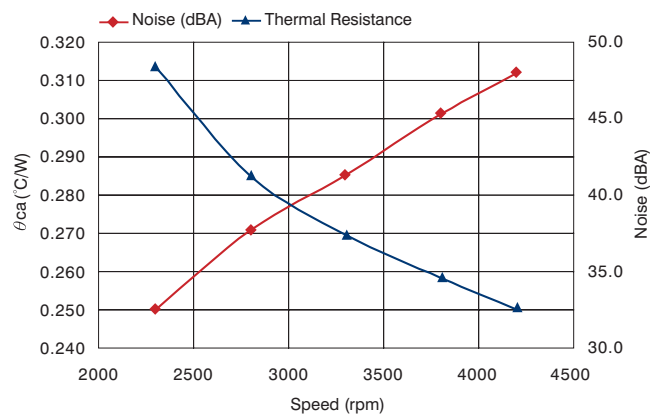

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>