

742A Series

RESISTANCE STANDARDS

Instruction Manual

P/N 850255
September 1988
©1988, John Fluke Mfg. Co., Inc., all rights reserved. Litho in U.S.A.

FLUKE

WARRANTY

John Fluke Mfg. Co., Inc. (Fluke) warrants this instrument to be free from defects in material and workmanship under normal use and service for a period of 1 year from date of shipment. Software is warranted to operate in accordance with its programmed instructions on appropriate Fluke instruments. It is not warranted to be error free. This warranty extends only to the original purchaser and shall not apply to fuses, computer media, batteries or any instrument which, in Fluke's sole opinion, has been subject to misuse, alteration, abuse or abnormal conditions of operation or handling.

Fluke's obligation under this warranty is limited to repair or replacement of an instrument which is returned to an authorized service center within the warranty period and is determined, upon examination by Fluke, to be defective. If Fluke determines that the defect or malfunction has been caused by misuse, alteration, abuse, or abnormal conditions of operation or handling, Fluke will repair the instrument and bill the purchaser for the reasonable cost of repair. If the instrument is not covered by this warranty, Fluke will, if requested by purchaser, submit an estimate of the repair costs before work is started.

To obtain repair service under this warranty purchaser must forward the instrument, (transportation prepaid) and a description of the malfunction to the nearest Fluke Service Center. The instrument shall be repaired at the Service Center or at the factory, at Fluke's option, and returned to purchaser, transportation prepaid. FLUKE ASSUMES NO RISK FOR IN-TRANSIT DAMAGE.

THE FOREGOING WARRANTY IS PURCHASER'S SOLE AND EXCLUSIVE REMEDY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY, OR FITNESS FOR ANY PARTICULAR PURPOSE OR USE. FLUKE SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OR LOSS WHETHER IN CONTRACT, TORT, OR OTHERWISE.

CLAIMS

Immediately upon arrival, purchaser shall check the packing container against the enclosed packing list and shall, within thirty (30) days of arrival, give Fluke notice of shortages or any nonconformity with the terms of the order, If purchaser fails to give notice, the delivery shall be deemed to conform with the terms of the order.

The purchaser assumes all risk of loss or damage to instruments upon delivery by Fluke to the carrier. If an instrument is damaged in transit, PURCHASER MUST FILE ALL CLAIMS FOR DAMAGE WITH THE CARRIER to obtain compensation. Upon request by purchaser, Fluke will submit an estimate of the cost to repair shipment damage.

Fluke will be happy to answer all questions to enhance the use of this instrument. Please address your requests or correspondence to: JOHN FLUKE MFG. CO., INC., P.O. BOX C9090, EVERETT, WA 98206,

INTRODUCTION

The 742A Series are small, light, rugged resistance standards. The standards require no temperature-controlled air or oil bath. The 742A Series are well suited for use as the following:

- Working standards
- Portable transfer standards
- Calibration support for the Fluke 5700A Calibrator

Stability and temperature coefficients of the 742A Series make them ideal for easy transport to and operation in any working environment within the range of 18 to 28°C. The standards come with six-month and one-year uncertainty specifications. Depending on the accuracy required, a 742A can be recertified at intervals based on either specification.

Each 742A comes with a Report of Calibration and a rear panel label showing the measured value. The rear panel also has a Fluke Primary Standards Lab calibration label, labels that show temperature coefficient alpha and beta centered on 23°C, and the standard's serial number.

NOTE

Refer to "How Temperature Correction Factors are Calculated," further on in this manual for definitions of alpha and beta.

SPECIFICATIONS

Table 1 lists specifications for the available 742A Series Resistance Standards.

Table 1. 742A Series Resistance Standard Specifications

MODEL	NOMINAL RESISTANCE AT 23°C	TIME STABILITY		CALIBRATION UNCERTAINTY	MAXIMUM DEVIATION FROM THE 23°C VALUE (18 TO 28°C)	MAXIMUM CURRENT (VOLTAGE)	POWER COEFFICIENT +1 PPM WHEN CURRENT EXCEEDS THE FOLLOWING
		180 DAY	1 YEAR				
742A-1	1Ω	±5.0 ppm	±8.0 ppm	±1.0 ppm	3.0 ppm	500 mA (500 mV)	200 mA
742A-10k	10 kΩ	±2.5 ppm	±4.0 ppm	±1.0 ppm	1.5 ppm	3 mA (30V)	0.6 mA

GENERAL SPECIFICATIONS:

Accuracy: The initial resistance is trimmed to ± 2 ppm of nominal. The measured value is printed on the rear panel.

Operating Temperature Range: $23 \pm 5^\circ\text{C}$

Storage Temperature Range: 0 to 40°C

Report of Calibration: The report of calibration includes a table of resistance values in 0.5° increments from 18 to 28°C .

Size: 8.64 cm H x 10.54 cm W x 12.70 cm L (including binding posts)
 (3.4 in H x 4.15 in W x 5.0 in L (including binding posts))
 Binding posts; 2.54 cm (1.0 in)

Weight: 0.91 kg (2.0 lbs)

DESIGN AND CONSTRUCTION NOTES

The 742A Series are constructed of arrays of Fluke wirewound precision hermetically-sealed resistors. No adjustable resistors of any kind are used.

Each 742A is built with a temperature coefficient near zero at 23°C. To further reduce errors caused by temperature changes, the binding posts are constructed of low-thermal emf material.

FEATURES

Figure 1 shows a front panel view. Figure 2 shows a rear panel view. Table 2 describes binding post functions. Table 3 describes the rear panel labels.

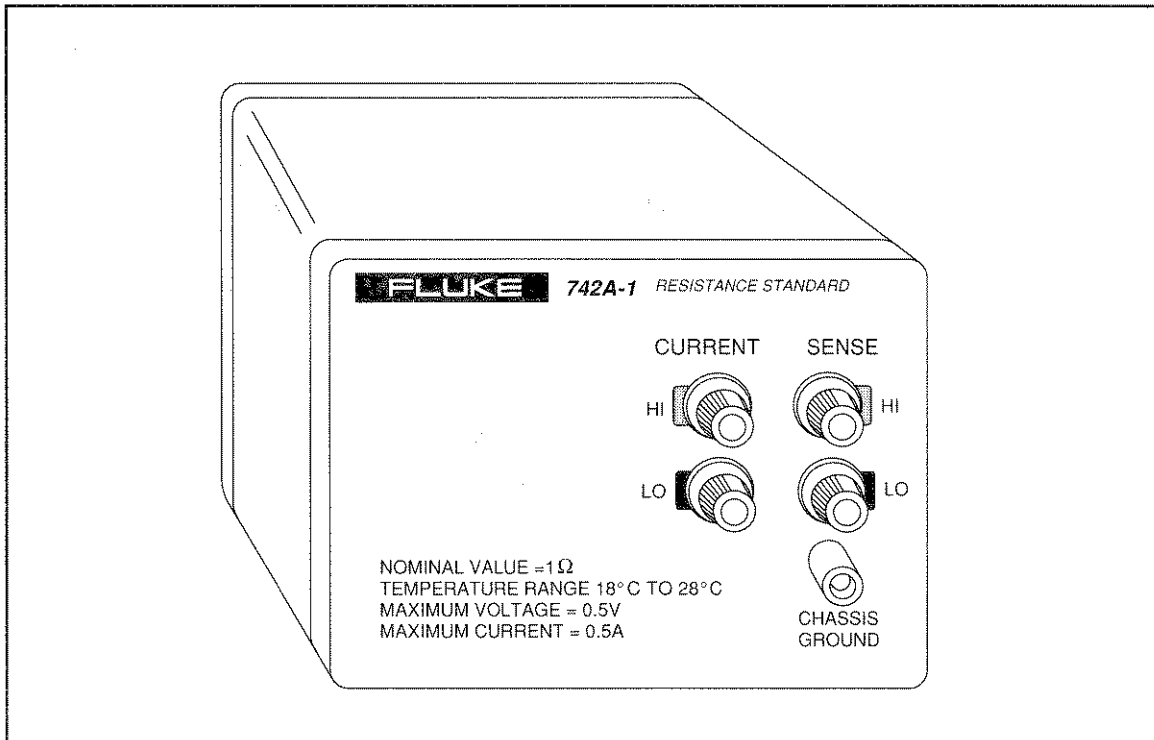


Figure 1. Typical Front Panel View

Table 2. Functions of the Binding Posts

742A BINDING POST	FUNCTION
CURRENT HI	Input for the current source from an ohmmeter
CURRENT LO	Input for the current source from an ohmmeter
SENSE HI	Measurement point for a four-wire ohmmeter
SENSE LO	Measurement point for a four-wire ohmmeter
CHASSIS GROUND	Connected to the case for shielding

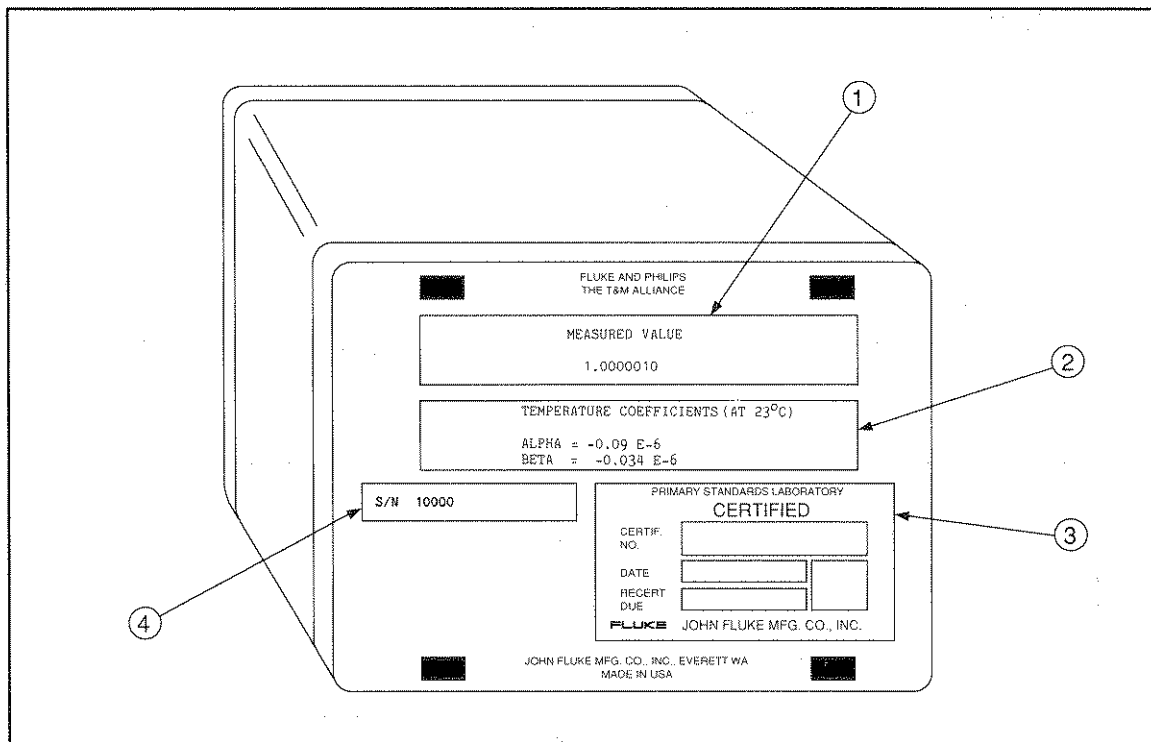


Figure 2. Typical Rear Panel View

Table 3. Contents of the Rear Panel Labels

REF NO.	LABEL INFORMATION
①	Measured value label. Shows the measured value at $23 \pm 0.6^\circ$; the same as on the Report of Calibration.
②	Temperature coefficient label. Shows alpha and beta centered on 23°C . Refer to "How Temperature Correction Factors are Calculated," further on in this manual for definitions of alpha and beta, and the formula to predict exact resistance at different temperatures.
③	Fluke Primary Standards Lab Calibration Label documents traceability to the U.S. National Bureau of Standards.
④	Serial number label. Shows the standard's serial number. This number and the full model number (i.e., 742A-1) positively identify a particular unit.

OPERATING NOTES

This part of the manual explains operational and environmental considerations for the 742A Series. Follow these guidelines when operating or storing the resistance standard. Precautions for handling are under "Care and Maintenance."

Connecting to the 742A Series

CAUTION

Do not apply voltages above the maximum voltage printed on the front panel. Excessive voltage can cause a permanent shift in resistance value or damage.

The specifications for models with CURRENT and SENSE binding posts require four-wire connections to the standard. Use these binding posts as described in Table 2.

For the case to act as a shield, the CHASSIS GROUND binding post must be connected to earth ground or instrument guard at some point in a calibration system. Normally when two or more instruments with guards are connected together, the use of a single common grounding point avoids ground loops. If applicable, ground the 742A CHASSIS GROUND binding post to that common grounding point.

Figure 3 shows a typical connection to a four-wire ohmmeter. Figure 4 shows the connection used to calibrate the 1Ω internal resistance standard in the 5700A.

Cable Recommendations

For optimum results, use two sets of the Fluke 5440A-7004 Low Thermal Test Leads, which are designed to reduce errors caused by thermal emfs.

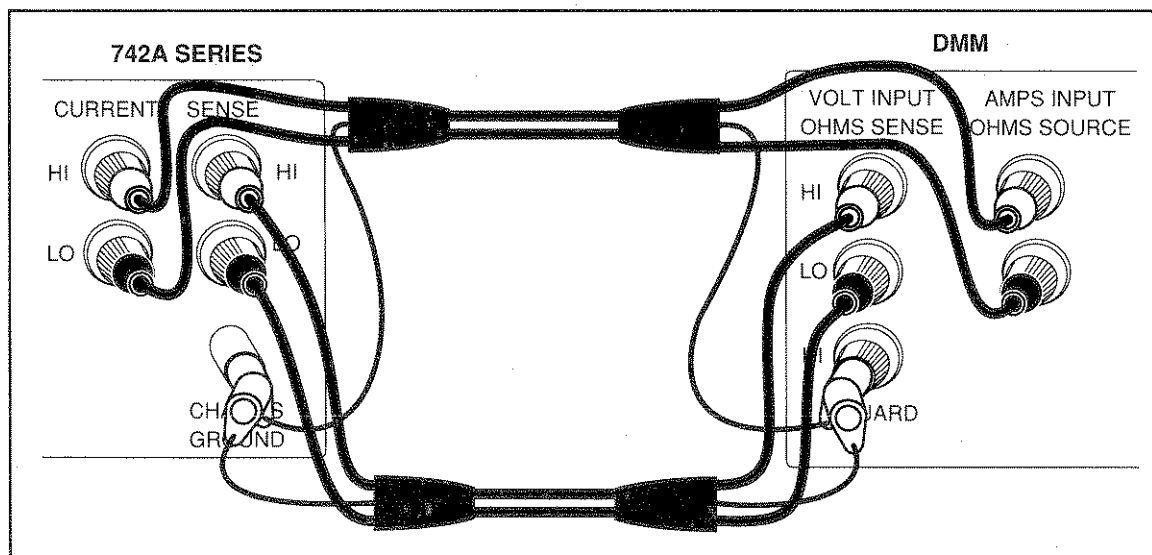


Figure 3. Connection to a Four-Wire Ohmmeter

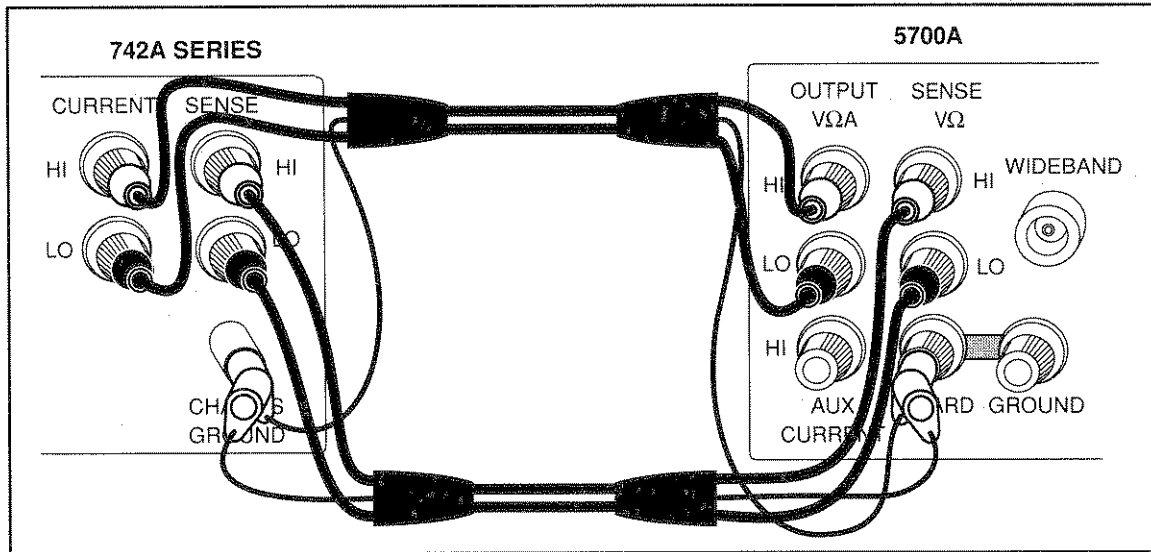


Figure 4. Connection to Calibrate the 5700A

Operating Temperature Range

You can use the 742A Series in ambient temperatures between 18 and 28°C. To predict the deviation from nominal at temperatures other than 23°C, use the temperature characterization table provided with each unit. The table shows the calculated value and the deviation from nominal at temperatures between 18 and 28°C in half-degree increments. An example of this table is included as Table 4.

How Temperature Correction Factors are Calculated

A label on the rear panel shows temperature coefficient factors alpha and beta centered on 23°C. (See Figure 2 for the label location.) The values of alpha and beta are individualized for each 742A. Alpha and beta are established by measurement in the Fluke Primary Standards Lab at 18°C, 23°C, and 28°C. The temperature characterization table is generated from these three measurements and the following formula:

$$R_t = R_{23} [1 + \alpha (t - 23) + \beta (t - 23)^2]$$

Where, R_t = Resistance at $t^\circ\text{C}$
 R_{23} = Resistance at 23°C
 α = Slope of the curve (ppm/°C) at 23°C
 β = Rate of change of slope of the curve (ppm/°C²)

α and β are constants which do not change appreciably over time and hence need to be determined only once.

In the case of the example 742A-1 used in this manual, α and β are calculated as follows:

$$\alpha = \frac{(R_{28} - R_{18})}{\Delta t} = \frac{-0.9 \text{ E-6}}{10} = -0.09 \text{ E-6}$$

$$\beta = \frac{\left(\frac{R_{28} + R_{18}}{2} - R_{23} \right)}{\left(\frac{\Delta t}{2} \right)^2} = \frac{-0.85 \text{ E-6}}{25} = -0.034 \text{ E-6}$$

Where, R_{28} = Resistance at 28°C
 R_{18} = Resistance at 18°C
 R_{23} = Resistance at 23°C
 $\Delta t = (28 - 18) = 10$

Table 4. Example 742A-1 Temperature Characterization Chart

Test Number: XXXX
 Date: 04-Aug-88
 Page 2 of 2

Serial No.: XXXXXX
 Alpha = -0.090 E-6
 Beta = -0.034 E-6

Temp (Celsius)	Resistance (OHMS)	Dev from nominal (in ppm)
18.0	1.0000006	0.6
18.5	1.0000007	0.7
19.0	1.0000008	0.8
19.5	1.0000009	0.9
20.0	1.0000010	1.0
20.5	1.0000010	1.0
21.0	1.0000010	1.0
21.5	1.0000011	1.1
22.0	1.0000011	1.1
22.5	1.0000010	1.0
23.0	1.0000010	1.0
23.5	1.0000009	0.9
24.0	1.0000009	0.9
24.5	1.0000008	0.8
25.0	1.0000007	0.7
25.5	1.0000006	0.6
26.0	1.0000004	0.4
26.5	1.0000003	0.3
27.0	1.0000001	0.1
27.5	0.9999999	-0.1
28.0	0.9999997	-0.3

Figure 5 shows a graph of the value of the 742A-1 represented by the sample temperature characterization chart (Table 4). To illustrate use of the formula, calculations for resistance at 20°C and 26°C are shown. You can see that using the formula shown with alpha and beta you get the same value as in the characterization table.

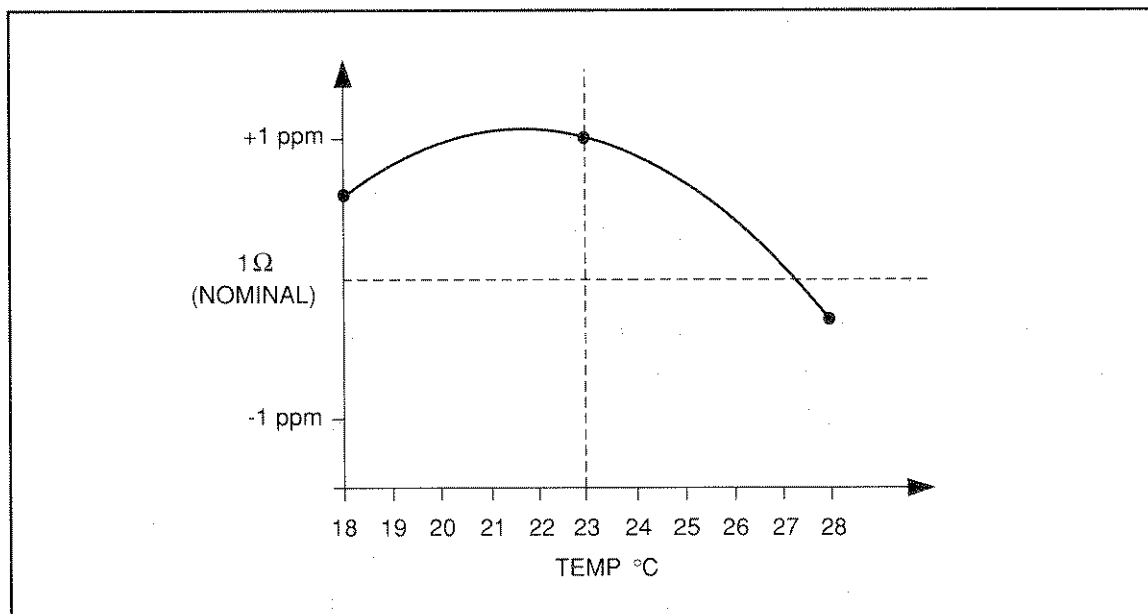


Figure 5. Graph of Resistance VS. Temperature for Sample 742A-1

$$\begin{aligned}
 R_t &= R_{23} [1 + \alpha (t - 23) + \beta (t - 23)^2] \\
 \text{At} &= 20^\circ\text{C}, \\
 R_{20} &= 1.0000010 [1 + (-0.09 \text{ E-}6) (-3) + (-0.034 \text{ E-}6) (-3)^2] \\
 &= 1.0000010 (1.0000003 - 0.0000003) \\
 &= 1.0000010 (1.0000000) \\
 &= 1.0000010\Omega
 \end{aligned}$$

$$\begin{aligned}
 R_t &= R_{23} [1 + \alpha (t - 23) + \beta (t - 23)^2] \\
 \text{At} &= 26^\circ\text{C}, \\
 R_{26} &= 1.0000010 [1 + (-0.09 \text{ E-}6) (3) + (-0.034 \text{ E-}6) (3)^2] \\
 &= 1.0000010 (1 - 0.0000003 - 0.0000003) \\
 &= 1.0000010 (1 - 0.0000006) \\
 &= 1.0000004\Omega
 \end{aligned}$$

Storage Temperature Range

To maintain accuracy within the specified limits, do not subject the 742A Series to temperatures below 0°C or above 40°C. If exposure to temperatures outside this range is unavoidable, you can minimize the adverse effects by doing the following:

- Keep the standards in the optional transit case (Option 742A-7002). The transit case is insulated and helps protect the standards during short-term temperature extremes.
- Keep exposure to temperature extremes brief.

CARE AND MAINTENANCE

The only maintenance procedure for the 742A Series is occasional cleaning. The following text gives cleaning instructions and precautions for handling.

Cleaning the 742A Series

To keep the 742A Series looking like new, clean the outer surfaces using a soft cloth slightly dampened with water or a non-abrasive mild cleaning solution that does not harm plastics.

CAUTION

Do not use aromatic hydrocarbons or chlorinated solvents for cleaning. They can damage the plastic materials used in the resistance standard.

Precautions for Handling

The 742A Series are designed for mechanical stability, but do not abuse the standard with excessive shock. Avoid temperature extremes as mentioned under "Storage Temperature Range". When you transport the standard, it is recommended that you use the Option 742A-7002 Transit Case for shock and temperature protection. The case holds two 742A Series Resistance Standards.

SERVICING INFORMATION

Because the 742A Series are certified and non-adjustable resistance standards, they are considered non-user repairable. If the unit is damaged, it must be returned to the factory for repair and recalibration.

RECERTIFICATION

For recertification, send the resistance standard to a Fluke technical center. For a nominal fee, Fluke will remeasure and recertify the value of your 742A based on comparison to standards traceable to the U.S. National Bureau of Standards. A new temperature characterization chart is provided on recertification. If you wish, you can record the changes at each recertification and use this data to more closely predict the performance of your 742A. A list of sales and service centers is located near the end of this manual.

Sales and Service Centers

U.S. SALES AREAS for all Fluke products

Alabama

Huntsville

4920 Corporate Drive
Suite J
Huntsville, AL 35805-6202
(205) 837-0581

Arizona

Tempe

2211 S. 48th Street
Suite B
Tempe, AZ 85282
(602) 438-8314

Tucson

(602) 790-9881

California

Burbank

2020 N. Lincoln Street
Burbank, CA 91504
(213) 849-7181

Northern

2300 Walsh Ave., Bldg. K
Santa Clara, CA 95051
(408) 727-0513

San Diego

(619) 292-7657

Southern

P.O. Box 19676
Irvine, CA 92713-9676
16969 Von Karman
Suite 100
Irvine, CA 92714
(714) 863-9031

Colorado

Denver

14180 E. Evans Ave.
Aurora, CO 80014
(303) 695-1000

Connecticut

Hartford

Glen Lochen East
41-C New London Turnpike
Glastonbury, CT 06033
(203) 659-3541

Florida

Clearwater

(813) 799-0087

Miami

(305) 462-1380

Orlando

940 N. Fern Creek Ave.
Orlando, FL 32803
(305) 896-4881

Tampa

(813) 251-9211

Georgia

Atlanta

2700 Delk Road
Suite 150
Marietta, GA 30067
(404) 953-4747

Illinois

Chicago

1150 W. Euclid Avenue
Palatine, IL 60067
(312) 705-0500

Indiana

Indianapolis

8777 Purdue Road
Suite 101
Indianapolis, IN 46268
(317) 875-7870

Louisiana

New Orleans

(504) 455-0814

Massachusetts

Boston

Middlesex Technology Center
900 Middlesex Turnpike
Building 8
Billerica, MA 01821
(617) 663-2400

Maryland

Baltimore

(301) 792-7060

Rockville

5640 Fishers Lane
Rockville, MD 20852
(301) 770-1570

Michigan

Detroit

33031 Schoolcraft
Livonia, MI 48150
(313) 522-9140

Minnesota

Bloomington

1801 E. 79th St.
Suite 9
Bloomington, MN 55420
(612) 854-5526

Missouri

St. Louis

11756 Borman Drive
Suite 160
St. Louis, MO 63146
(314) 993-3805

North Carolina

Greensboro

1310 Beaman Place
Greensboro, NC 27408
(919) 273-1918

New Jersey

Paramus

P.O. Box 930
Paramus, NJ 07653-0930
West 75 Century Road
Paramus, NJ 07652
(201) 262-9550

New Mexico

Albuquerque

(505) 881-3550

New York

Rochester

4515 Culver Road
Rochester, NY 14622
(716) 323-1400

Ohio

Cleveland

Plaza South Three
Suite 402
7271 Engle Road
Middleburg Heights, OH 44130
(216) 234-4540

Oklahoma

Northeast

(405) 236-2977

Oregon

Portland

(503) 227-2042

Pennsylvania

Malvern

200 Lindenwood Drive
Malvern, PA 19355
(215) 647-9550

Pittsburgh

(412) 261-5171

Texas

Austin

(512) 459-3344

Dallas

1801 Royal Lane
Suite 307
Dallas, TX 75229
(214) 869-0311

El Paso

(915) 533-3508

Houston

(713) 240-5995

San Antonio

10417 Gullfdale
San Antonio, TX 78216
(512) 340-0498

Utah

Salt Lake City

(801) 268-9331

Washington

Seattle

5020 148th Ave. N.E.
Suite 110
Redmond, WA 98052
(206) 881-6966

Washington, DC

Washington, DC

(301) 770-1570

INTERNATIONAL SALES OFFICES

Algeria

Bureau de Liaison Philips
(For Philips products)
24 rue Bougainville
El Mouradia, Alger
Tel: 60 14 05
TLX: 62221

Antilles

Philips Antillana N.V.
(For Philips products)
Schottegatweg Oost 146
P.O. Box 3523
Willemstad, Curacao
Tel: 599-9-615277
TLX: 1047

Argentina

Coasin S.A.
(For Fluke products)
Virrey del Pino 4071DPTO E-65
1430 CAP FED
Buenos Aires, Argentina
Tel: (54) (1) 552-5248
TLX: (390) 22284

Philips Argentina S.A.

(For Philips products)
Casilla Correo 3479
Vedia 3892
1430 Buenos Aires
Tel: 54-1-5414106/5417141
TLX: 21359/21243

Australia

Elmeasco Instruments Pty. Ltd.
(For Fluke products)
P.O. Box 30
Concord, N.S.W. 2137
Australia
Tel: (61) (2) 736-2888
TLX: (790) AA25887
FAX: (61) 2-733663

Elmeasco Instruments Pty. Ltd.

(For Fluke products)
P.O. Box 623
12 Maroondah Highway
Ringwood, Victoria 3134
Australia
Tel: (61) (3) 879-2322
TLX: (790) AA30418
FAX: (61) 3-879-4310

Elmeasco Instruments Pty. Ltd.

(For Fluke products)
P.O. Box 274
Salisbury, Qld Australia 4107
Tel: (61) (7) 875-1444
TLX: (790) AA44062

Elmeasco Instruments Pty. Ltd.

(For Fluke products)
P.O. Box 154
Prospect, South Australia 5082
Tel: (61) (8) 344-9000

Elmeasco Instruments Pty. Ltd.

(For Fluke products)
32 Teddington Rd.
Victoria Park
Western Australia 6100
Tel: (61) 9-470-1855

Philips Scientific & Industrial Equipment Division

(For Philips products)
Centrecourt 25-27 Paul Street
North Ryde
Sydney N.S.W. 2113
Tel: 88 88 222

Austria

**Walter Rekersch Elektronische
Geräte GmbH & Co.**
(For Fluke products)
Vertrieb KG
Obachgasse 28
1220 Vienna, Austria
Tel: (43) (222) 253626
TLX: (847) 134759
FAX: (43) (222) 257275

Osterreichische Philips Industrie GmbH

(For Philips products)
Geschäftsbereich I & E
Marktbereich Test-und Meßgeräte
A-1101 WIEN, Triester Straße 64
Tel: (0222) 60101/1772 DW

Bahrain

Basma W.L.L.
(For Fluke products)
P.O. Box 5701
Manama, Bahrain
Tel: (973) 251-364
TLX: (955) 9003
FAX: (965) 245218

Bangladesh

Motherland Corporation
(For Fluke products)
24 Hatkhola Road, Tikatuli
Dacca-3, Bangladesh
Tel: 257249, TLX: (950) 642022

Philips Bangladesh Ltd.

(For Philips products)
P.O. Box 62, Ramna
16/17 Kawran Bazar C/A
DHAKA
Tel: 411976
TLX: 65668

Belgium

**N.V. Philips Professional Systems S.A.
Test and Measurement**
Tweestationsstraat 80
Rue des Deux Gares
Brussel 1070 Bruxelles
Tel: 2-5256111

Bolivia

Coasin Bolivia S.R.L.
(For Fluke products)
Casilla 7295
La Paz, Bolivia
Tel: (591) (2) 40962
TLX: (336) 3233 COALAP BV

Brazil

ATP Hi-Tek Eletronica Ltda.
(For Fluke products)
Al. Amazonas 422, Alphaville
Barueri
CEP 06400, Sao Paulo, Brazil
Tel: (55) (11) 421-5477
TLX: (391) 1171413

Philips do Brasil Ltda.

(For Philips products)
Av. Eng. Luiz Carlos Berrini 3009
Caixa Postal 8681
04571 SAO PAULO S.P.
Tel: 55-11-2411611
TLX: (011) 32750

Brunei

Rank O'Connor's, Sdn Bhd
(For Fluke products)
No. 8 Block D,
Sufri Shophouse Complex
Mile 1 Jalan Tutong
Bandar Seri Begawan
Negara Brunei Darussalam
Tel: (673) (2) 23109 or 23557
TLX: (799) BU2265 RANKOC

Canada

Fluke Electronics Canada Inc.
400 Britannia Rd. East Unit #1
Mississauga, Ontario
L4Z 1X9 Canada
Tel: (416) 890-7600
FAX: (416) 890-6866

Fluke Electronics Canada Inc.

1690 Woodward Drive
Suite 216
Ottawa, Ontario
K2C 3R8 Canada
Tel: (613) 723-9453
FAX: (613) 723-9458

Fluke Electronics Canada Inc.

1255 Trans Canada Highway
Suite 130
Dorval, Quebec
H9P 2V4 Canada
Tel: (514) 685-0022
FAX: (514) 685-0039

Fluke Electronics Canada Inc.

101-1144 - 29th Ave. N.E.
Calgary, Alberta
T2E 7P1 Canada
Tel: (403) 291-5215
FAX: (403) 291-5219

Chile

Intronica Chile, Ltda.
(For Fluke products)
Casilla 16228
Santiago 9, Chile
Tel: (56) 2-2321886
TLX: (332) 346351

Philips Chilena S.A.

de Produc. Electr.
(For Philips products)
Avenida Santa Maria 0760
Casilla 2687
Santiago De Chile
Tel: 56-2-770038
TLX: 240239

China, Peoples Republic of

Fluke International Corp.
(For Fluke products)
P.O. Box C9090 M/S 206A
Everett, WA 98206 U.S.A.
Tel: (206) 356-5511
TLX: 185103 FLUKE UT
FAX: (206) 356-5116

Colombia

Sistemas E Instrumentacion, Ltda.
(For Fluke products)
Carrera 13, No. 37-43. Of. 401
Ap. Aereo 29583
Bogota DE, Colombia
Tel: (57) 232-4532
TLX: (396) 45787

Industrias Philips de Colombia S.A.

(For Philips products)
Apartado Aereo 4282
Calle 13 No. 51-39
Bogota
Tel: 57-1-2600600
TLX: Philcolon 44776

Cyprus

Chris Radiovision, Ltd.
(For Fluke products)
P.O. Box 1989
Nicosia, Cyprus
Tel: (357) (21) 66121
TLX: (826) 2395

Cyprus, Northern

Ucok Buroteknik
(For Fluke products)
2C & 2D Miftu Ziyai Street
Lefkosa, Northern Cyprus
Mersin 10, Turkey
Tel: (90) (741) 357-20-71777
TLX: (821) 57267

Denmark

Tage Olsen A/S

(For Fluke products)
Ballerup Byvej 222
2750 Ballerup
Denmark
Tel: (45) (2) 658111
TLX: (855) 35293
FAX (45) 2-680 300

Philips A/S Test & Measurement

(For Philips products)
Prags Boulevard 80
DK-2300-Kobenhavn S
Tel: (01) 572222
TLX: 31201

Ecuador

Proteco Coasin Cia., Ltda.

(For Fluke products)
P.O. Box 228-A
Ave. 12 de Octubre 2285
y Orellana
Quito, Ecuador
Tel: (593) (2) 529684
TLX: (393) 22085

Philips Ecuador S.A.

(For Philips products)
Casilla 343
Paez 118 y Avenida Patria
Quito
Tel: 593-2-546100/546125
TLX: 2227 PHLPSQ ED

Proteco Coasin Cia., Ltda.

(For Fluke products)
P.O. Box 9733
Ave. Principal No. 204 y Calle Segunda
Urbanizacion Miraflores
Guayaquil, Ecuador
Tel: (593) (4) 387519

Egypt and Sudan

Electronic Engineering

Liaison Office

(For Fluke products)
P.O. Box 2891 Horreya
11361 Heliopolis, Cairo
Egypt
Tel: (20) 2-695705
TLX (927) 22782

Philips Egypt Liaison Office of Philips
(For Philips products)
Export B.V.
10, Abdel Rahman el Rafel Str.
P.O. Box 1687
Dokki, Cairo
Tel: 20-2-3490922
TLX: 22816 PHEGY UN

Ethiopia
(For Philips products)
Philips Ethiopia (Priv. Ltd. Co.)
Ras Abebe Areguay Avenue
P.O. Box 2565
Addis Ababa
Tel: 148300

Fiji
Awa New Zealand Ltd.
(For Fluke products)
37 Freestone Walu Bay Road
P.O. Box 858
Suva, Fiji
Tel: (679) 312079
TLX: (792) 2347
FAX: (679) 314379

Finland
Instrumentarium Elektronikka
(For Fluke products)
P.O. Box 64
02631 Espoo 63
Finland
Tel: (358) (0) 5281
TLX: (857) 124426
FAX: (358) 0-502-1073

OY Philips AB
(For Philips products)
P.O. Box 11
02631 ESPOO
Tel. 0-5257225

France
M.B. Electronique S.A.
(For Fluke products)
606 Rue Fournay
P.O. Box 31
78530 BUC, France
Tel: (33) (1) 39568131
TLX: (842) 695414
FAX: (33) (1) 3956-53-44

S.A. Philips Industrielle et Commerciaux
Division Science et Industrie
(For Philips products)
105 rue de Paris, BP 62
93002 BOBIGNY Cedex
Tel: (1) 49 42 80 80
TLX: 210290

Germany
Philips GmbH
(For Philips products)
Unternehmensbereich
Elektronik für Wissenschaft
und Industrie
Vertriebsbereich Testr and Meßtechnik
Miramstraße 87 Postfach 310320
D-3500 KASSEL
Tel: (0561) 5010. TLX: 997070

Bereich Fluke Produkts
Oskar-Messter-Strape 18
D-8045 Ismaning

Great Britain
Philips Test & Measurement
York Street
Cambridge CB1 2PX
Tel: (0223) 358866
TLX: 817331

Philips Test & Measurement
(For Fluke products)
Colonial Way
Watford WD2 4TT

Greece
Hellenic Scientific Representations Ltd.
(For Fluke products)
11 Vrassida Street
Athens 612, Greece
Tel: (30) (1) 7211140
TLX: (863) 219330

Philips S.A. Hellenique I&E Division
(For Philips products)
15, 25th March Street
GR-17778 TAVROS or
P.O. Box 3153 Athens
Tel: 30-1-4894911
TLX: 241566-241567

Hong Kong
Fluke Asia Ltd.
(For Fluke products)
Shun Tak Centre
Suite No. 1501
200 Connaught Road
Central, Hong Kong
Tel: (852) 5-482116
FAX: (852) 5-479863
TLX: (780) 87058 Fluke HX

Philips Hong Kong Ltd.
(For Philips products)
29/F Hopewell Centre
17 Kennedy Road
G.P.O. Box 2108
Hong Kong
Tel: 852-5-283298
TLX: 73660 PHILH HX

Schmidt & Co (H.K.), Ltd
(For Fluke products)
18th Floor, Great Eagle Centre
23 Harbour Road
Wanchai, Hong Kong
Tel: (852) (5) 8330-222
TLX: (780) 74766 or 76762
FAX: (852) 5-8918754

India
Hinditron Services Pvt., Ltd.
(For Fluke products)
69/A.L. Jagmohandas Marg
Bombay 400 006, India
Tel: (22) 8121316, (91) (22) 8125344
TLX: (953) 1175326

Hinditron Services Pvt., Ltd.
(For Fluke products)
8th Main Road
33/44A Raj Mahal Vilas Extension
Bangalore 560 080, India
Tel: (91) 812-363139, TLX: (953) 8452741

Hinditron Services Pvt. Ltd.
(For Fluke products)
5th Floor, "Castle House"
5/1A, Hungerford St.
Calcutta 700 017, India
Tel: (91) 33-432628, TLX (953) 21-4153

Hinditron Services Pvt. Ltd.
(For Fluke products)
204-5-6 Hemkunt Tower
98 Nehru Place
New Delhi, 110019, India
Tel: (91) 11-6410380, TLX: (953) 316458

Hinditron Services Pvt., Ltd.
(For Fluke products)
Emerald Complex 1-7-264
5th Floor
114 Sarojini Devi Rd.
Secunderabad 500 003, India
Tel: 842 821117, TLX: (953) 04256973

Peico Electronics & Electricals Ltd.
(For Philips products)
Shivsagar Estate, Block 'A'
Dr. Annie Besant Road
P.O.B. 6598
Worli, Bombay 400018
Tel: 4921500/4921513

Indonesia
P.T. Lamda Triguna
(For Fluke products)
Tel: (62) 21-8195365
TLX: (796) 45483 LOMAS I.A.
P.O. Box: 6/JATJG, Jakarta 13001

P.T. Daeng Brothers
(For Philips products)
Centre Point Building, 3rd Fl.
Jalan Gatot Subroto Kav. 35/36
P.O. Box 41 Tebet
Jakarta
Tel: 62-21-517900
TLX: 62798 PHDC IA

Iran
Philips Iran Ltd.
(For Philips products)
(Private Joint Stock Comp.)
P.O. Box 11365-3891
Tehran
Tel: 98-21-674138
TLX: 212545 PHPS IR

Iraq
Philips Midden Oosten B.V.
(For Philips products)
Baghdad Branch
Hai Al Whida. Area No. 902
Street No. 12, Bldg. 141/10
P.O. Box 5749
Baghdad
Tel: 7187181
TLX: 212439 Philips IK

Ireland
Circuit Specialists Limited
(For Fluke products)
Unit 5 Enterprise Centre
Plassey Technological Park
Castleroy, Limerick
Ireland
Tel: (852) (61) 330333
TLX: (852) 70092

P.J. Brennan and Company Ltd.
(For Philips products)
61 Stillorgan Industrial Park
Stillorgan, Co. Dublin
Tel: 952501
TLX: 3817
FAX: 952333

Israel
R.D.T. Electronics Engineering Ltd.
P.O. Box 43137
Tel Aviv 61430
Israel
Tel: (972) (3) 483211, TLX: 371452
FAX: 972-3-492190

Italy
Sistrel S.p.A.
(For Fluke products)
Via Pelizza da Volpedo 59
20092 Cinisello Balsamo
Milan, Italy
Tel: (39) (2) 6181893, TLX: (843) 334643
FAX: (39) 2-6182440

Sistrel S.p.A.
(For Fluke products)
Via le Erminio Spalla No. 41
00142 Rome, Italy
TLX: (843) 625857, FAX (39) 6-504137

Sistrel S.p.A.
(For Fluke products)
Via Cintia
Parco S. Paolo 35
80126 Naples, Italy
Tel: (39) (81) 7679700
FAX (39) 81-7661361

Philips S.p.A.
(For Philips products)
Sezione S & I, T & M Dept.
Viale Elvezia 2
20052 Monza
Tel: (039) 3635240/8/9
TLX: 333343

Japan
John Fluke Mfg. Co., Inc.
Japan Branch
(For Fluke products)
Sumitomo Higashi Shinbashi Bldg.
1-1-11 Hamamatsucho
Minato-ku, Tokyo 105, Japan
Tel: (81) (3) 434-0181
TLX: (781) 2424331
FAX: 81-3-434-0170

John Fluke Mfg. Co., Inc.
Japan Branch
(For Fluke products)
Katsushige Building
2-45 Kohraibashi
Higashi-ku, Osaka 541
Japan
Tel: (81) (6) 229-0871
FAX: 81-6-229-1098

NF Circuit Design Block Co., Ltd.
(For Philips products)
3-20 Tsunashima Higashi, 6-Chome.
Kokokoku, Yokohama 223
Tel: (045) 452-0411
TLX: 3823-297

Kenya
Philips (Kenya) Ltd.
(For Philips products)
OL Kalou Road, Industrial Area
P.O. Box 30554
Nairobi
Tel: 254-2-557999, TLX: 22225 Nairobi

Korea, Republic of
Myoung Corporation
(For Fluke products)
Yeo Eui Do
P.O. Box 14
Seoul, Korea
Tel: (82) (2) 784-9942
TLX: MYOUNG K24283
FAX (82) 2-784-2387

Kuwait
Al Bahar International Group
(For Fluke products)
P.O. Box 26672 Safat
13127 Safat, Kuwait
Tel: (965) 848601. TLX: (959) 44822

Lebanon and Jordan
Mabek (Electronic Division)
(For Fluke products)
P.O. Box 13-5657
Beirut, Lebanon
Tel: 812523, TLX: (923) 22889

Philips Middle East S.A.R.L.
(For Philips products)
B.P. 11-670
Ave. Sami Solh
Beyrouth
Tel: 392320/1
TLX: 20765 LE PHIBAN

Malaysia
Mecomb Malaysia SDN BHD
(For Fluke products)
P.O. Box 24
46700 Petaling Jaya
Selangor, Malaysia
Tel: (60) 3-7743422, TLX: (784) MA37764
FAX: (60) 3-774 3414

Philips Malaysia Snd. Bhd./
Wisma Philips
(For Philips products)
1st, 2nd, 3rd Floors, 3 Jalan
SS 15/2a, P.O. Box 12163
Subang Jaya
47500 Petaling Jaya
Tel: 60-3-7345511
TLX: PHIMAL MA 25111

Malta
Fabian Enterprises
(For Fluke products)
20, Msida Road
Gzira, Malta
Tel: 513283/40216, TLX: (838) 1837

Mexico
Mexicana de Electronica
Industrial S.A. (MEXEL)
Diagonal No. 27
Entre Calle de Eugenia Y Ave.
Colonia del Valle
C.P. 03100, Mexico
Tel: (905) 660-4323, TLX: (383) 1771038

Morocco
Oussama S.A.
(For Fluke products)
Angle Boulevard Emile Zola et
Rue Rethel
P.O. Box 2007 Casa
Casablanca, Morocco
Tel: (212) 24-13-38, TLX: (933) 22730 M

Somaciel
(For Philips products)
304 Boulevard Mohamed V,
Casablanca 05
Tel: 30 80 51/52
TLX: 27021

Nepal
Associated Enterprises
(For Fluke products)
GPO Box 790, Pyaphal Tole
Kathmandu, Nepal
Tel: 13868, TLX: 2568

Netherlands
Philips Nederland
Test en Meetapparaten
Hoevenseweg 55A
5017 AD TILBURG
Postbus 115
5000 AC TILBURG
Tel: 013-352455
TLX: 52683

Fluke European Headquarters
(For Fluke products)
P.O. Box 2269
5600 CG Eindhoven
The Netherlands
Tel: (40) 458045, TLX: (844) 51846
FAX: 31-40-457515

New Zealand
Northrop Instruments & Systems Ltd.
(For Fluke products)
Information Technology Group
131 Khyber Pass Road
Private Bag, Newmarket
Auckland 1, New Zealand
Tel: (64) (9) 501-801, TLX: (791) 21570
FAX: 64-9-543430

Northrop Instruments & Systems Ltd.
(For Fluke products)
Information Technology Group
First Floor, Northrop Bldg.
189-191 Willis Street
P.O. Box 2406
Wellington, New Zealand
Tel: (64) (4) 856-658, TLX: (791) 3380

Northrop Instruments & Systems Ltd.
(For Fluke products)
Information Technology Group
110 Mandeville Street
P.O. Box 8388
Christchurch, New Zealand
Tel: (64) (3) 488-874, TLX: (791) 4801

Philips New Zealand Ltd.
Industrial & Electro-acoustic
Systems Division
2 Wagener Place, P.O. Box 4 021
Auckland 3, New Zealand
Tel: (09) 894-160
TLX: NZ 2395, FAX: (9) 862-728

Nigeria
Associated Electronic Products
(Nigeria) Ltd.
(For Philips products)
KM 16, Ikorodu Road, Ojota
P.O. Box 1921
Lagos
Tel: 234-1-900160/69
TLX: 21961 NG

Norway
Morgenstjerne & Co A/S
(For Fluke products)
Konghellegate 3
P.O. Box 6688, Rodelokka
Oslo 5, Norway
Tel: (47) (2) 356110, TLX: (856) 71719
FAX: (47) 2-381457

Norsk Al/S Philips
(For Philips products)
Dept. I&E, Test & Measurement
Sandstuveien 70, P.O. Box 1
Manglerud
Oslo 6
Tel: 2-680200

Oman
OHI Telecommunications
(For Fluke products)
P.O. Box 889
Muscat, Oman
Tel: (968) 603606, TLX: (926) 5052

Pakistan
International Operations
(PAK Private), Ltd.
(For Fluke products)
505 Muhammadi House
I.I. Chundrigar Road
P.O. Box 5323, Karachi, Pakistan
Tel: (21) 221127, TLX: (952) 24494

Philips Electrical Co. of Pakistan Ltd.
(For Philips products)
P.O. Box 7101
M.A. Jinnah Road
Karachi 3
Tel: 92-21-725772
TLX: 2874 PHPAK PK

Paraguay
Philips del Paraguay S.A.
(For Philips products)
Avenida Artigas 1519
Casilla de Correo 605
Asuncion
Tel: 595-21-291924
TLX: PY 215

Peru
Importaciones y Representaciones
Electronicas S.A.
(For Fluke products)
Avda. Franklin D. Roosevelt 105
Lima 1, Peru
Tel: (51) (14) 28-8650, TLX. (394) 25663

Philips Peruana S.A.
(For Philips products)
Av. Alfonso Ugarte 1268
Lima 5 or Apartado 1841
Lima 100
Tel: 51-14-326070
TLX: 21678 PE PHILPER

Philippines, Republic of
Spark Radio & Electronics, Inc.
(For Fluke products)
Greenhills P.O. Box 610
San Juan, Metro Manila, 3113
Philippines
Tel: (2) 775192, TLX: (722 or 732) 27901

Philips Industrial Development Inc.
(For Philips products)
2246, Pasong Tamo
P.O. Box 911
MCCPO Makati Riazal D
Metro Manila
Tel: 63-2-868951

Portugal
Decada Espectral
Equipamentos de Electronica
(For Fluke products)
Av. Bombeiros Voluntarios
Lote 102B, Miraflores/Alges
1495 Lisbon, Portugal
Tel: (351) (1) 4103420, TLX (832) 15515
FAX: (351) 1-410-1844

Philips Portuguesa, S.A.R.L.,
Divisao de Sistemas Industriais
(For Philips products)
e Electri-Acastic
Oturilia-Cavinaxille
2795 Linda-A-Velha
Tel: 2190071; TLX: 42987

Saudi Arabia
Electronic Equipment Marketing Co.
(For Fluke products)
P.O. Box 3750
Riyadh, 11481 Saudi Arabia
Tel: (928) (1) 477-1650, TLX. 401120

Singapore, Republic of
Rank O'Connor's (PTE) Ltd.
(For Fluke products)
O'Connor House
98 Pasir Panjang Road
Singapore 0511
Republic of Singapore
Tel: (65) 4737944, TLX: (786) RS21023

Philips Project Development (S) Pte. Ltd.
(For Philips products)
Lorong 1, Toa Payoh
Singapore 1231, P.O. Box 340
Toa Payoh Central Post Office
Singapore 9131
Tel: 65-3502000
TLX: Philips RS/21375

South Africa
Protea, PNI
(For Fluke products)
P.O. Box 39127
Bramley 2018
Republic of South Africa
Tel: (27) (11) 786-3647
TLX: (960) 4-24409 SA
FAX 27-11-887-1479

South African Philips (Pty) Ltd.
(For Philips products)
P.O.B 7703
2 Herb Street
New Doornfontein
Johannesburg 2000
Tel: (011) 6179111

South Korea
Philips Industries (Korea) Ltd.
(For Philips products)
C.P.O. Box 3680, Philips House
260-199, Itaewon-Dong
Yongsan-Ku
Seoul
Tel: 82-2-794-5011/5
TLX. Philkor K 27291

Spain
ESSA
(For Fluke products)
Equipos y Sistemas S.A.
C/Apolonio Morales, 13-B
Madrid 16, Spain
Tel: (34) (1) 458-0150, TLX: (831) 42856
FAX: (34) 1-458-0150

Philips Iberica S.A.E. Dpto
(For Philips products)
Aparatos de Medida
Martinez Villergas 2
Madrid 28027
Tel: 404-2200

Sri Lanka
Computerlink Data Systems, Ltd.
(For Fluke products)
331 Union Place
Colombo, 2, Sri Lanka
Tel: (94) (1) 28641/2, TLX: (954) 22455

Sweden

Philips Foersaeljning AB
Division Industrielektronik
Test & Measurement
S-115 84 Stockholm
Tel: (08) 782 18 00

Switzerland

Traco Electronic AG
(For Fluke products)
Jenatschstrasse 1
8002 Zurich
Switzerland
Tel: (41) (1) 201-0711, TLX: (845) 815570

Philips AG

(For Philips products)
Test-und Messtechnik
Postfach
CH-8027 Zurich
Tel. (01) 4882390

Syria

Mabek (Electronics Division)
(For Fluke products)
P.O. Box 4238
Damascus, Syria

Philips Moyen-Orient S.A.R.L.

(For Philips products)
Rue Fardoss 79
P.O. Box 2442
Damascus
Tel. 218605/221650
TLX: PHISYR 411203 SY

Taiwan

Schmidt Electronics Corp.
(For Fluke products)
5th Floor, Cathay Min-Sheng
Commercial Building,
344 Min-Sheng East Road
Taipei 104, Taiwan R.O.C.
Tel: (886) (2) 501-3468, TLX: (785) 11111
FAX: (886) 2-5029692

Philips Taiwan Ltd.

(For Philips products)
150, Tun Hua North Road
P.O. Box 22978
Taipei
Tel: 886-2-7120500
TLX: 21570 PHILPEI

Tanzania

Philips (Tanzania) Ltd.
(For Philips products)
T.D.F.L. Building - 1st Floor
P.O. Box 20104
Ohio/Upanga Rd.
Dar es Salaam
Tel: 29571/4
TLX: 41016

Thailand

Measuretronix Ltd.
(For Fluke products)
2102/63 Ramkhamhaeng Road
Bangkok 10240
Thailand
Tel: (66) (2) 374-2516, TLX: (788) 82796

Philips Electrical Co. of Thailand Ltd.

(For Philips products)
283, Silom Road
P.O. Box 961
Bangkok 10500
Tel: 66-2-233 6330.9
TLX: 87327 PHILTHA TH

Tunisia

Selep S.A.R.L.
(For Fluke products)
6, Rue de Sparte
Tunis - 1000 RP
Tunisia
Tel: (216) (1) 248093, TLX: (934) 13030

STIET

(For Philips products)
32bis rue Ben Ghedahem
Tunis
Tel: 348666, TLX: 14512

Turkey

Erkman Elektronik Aletler
(For Fluke products)
Ticaret Anonim Sirketi
Necatibey Cad 92/3
Karakoy, Istanbul, Turkey
Tel. (90) (1) 1441546, TLX: (821) 24399
FAX: (90) 1-1497037

Turk Philips Ticaret A.S.

(For Philips products)
Inonu Caddesi 78/80
P.K. 504
80074 Beyoglu-Istanbul
Tel: 90-1-1435910
TLX: 24192 PHTRTR

United Arab Emirates

Haris Al-Afag, Ltd.
(For Fluke products)
P.O. Box 8141
Kamal Hamza Bldg
Traffic Police Rd.
Dubai, U.A.E.
Tel: (971) 4-283625, TLX: (958) 48168

Philips Middle East

(For Philips products)
Dubai Intern. Trade Centre,
11th Floor
P.O. Box 9269
Dubai
Tel: 971-4-377000
TLX: 46350 PMOA EM

Al-Sanani Cen. Trad. Est.

(For Fluke products)
P.O. Box 7187
Abu-Dhabi, U.A.E.
Tel: (971) (2) 821370
TLX: (958) 23966

Uruguay

Coasin Uruguay S.A.
(For Fluke products)
Libertad 2529
Casilla de Correo 1400
Montevideo, Uruguay
Tel: (598) (2) 789015, TLX: (398) UY23010

Industrias Philips del Uruguay S.A.

(For Philips products)
Av. Uruguay 1287
Casilla de Correo 294
Montevideo
Tel: 919000
TLX: PHILURU UY 22296

Venezuela

Coasin C.A.
(For Fluke products)
Calle 9 Con Calle 4, Edif Edinurbi
Apartado de Correos NR-70.136
Los Ruices
Caracas 1070-A, Venezuela
Tel: (58) 2-241-0309, TLX: (395) 21027

Inds. Venezolanas Philips. S.A.

(For Philips products)
Av. Francisco de Miranda,
Urb. La Carlota,
Edf. Centro Empresarial Parque del Este
Apartado 1167
Caracas 1010-A
Tel: 58-2-203.71111
TLX: 25267 IVPSA VC

Zaire

Philips Electronics S.A.R.L.
(For Philips products)
137, Boulevard du 30 juin
B.P. 16636
Kinshasa
Tel: 31693, TLX: 21078 KINSHASA

Zambia

Philips Electrical Zambia Ltd.
(For Philips products)
Mwembeshi Road
P.O. Box 1878
Lusaka
Tel: 218511/218701
TLX: ZA 41220

Zimbabwe

Philips Electrical (Pvt.) Ltd.
(For Fluke products)
62 Mutare Road
P.O. Box 994
Harare
Tel: 47211/48031
TLX: 2236

For countries not listed above:**Philips Export B.V.**

I&E Export
Test & Measuring
Building HVW-3
P.O. Box 218
5600 MD Eindhoven
The Netherlands
Tel: +31 40 324842
TLX: 35000 phic nl
FAX: +31 40 324898

TECHNICAL SERVICE CENTERS

U.S. Service Locations

California

Fluke Technical Center
2020 N. Lincoln Street
Burbank, CA 91504
(213) 849-4641

Fluke Technical Center
2300 Walsh Ave., Bldg. K
Santa Clara, CA 95051
(408) 727-8121

Colorado

Fluke Technical Center
14180 East Evans Ave.
Aurora, CO 80014
(303) 695-1000

Florida

Fluke Technical Center
940 N. Fern Creek Avenue
Orlando, FL 32803
(305) 896-4881

Illinois

Fluke Technical Center
1150 W. Euclid Ave.
Palatine, IL 60067
(312) 705-0500

Maryland

Fluke Technical Center
5640 Fishers Lane
Rockville, MD 20852
(301) 770-1576

New Jersey

Fluke Technical Center
West 75 Century Road
P.O. Box 930
Paramus, NJ 07653-0930
(201) 262-9550

Texas

Fluke Technical Center
1801 Royal Lane, Suite 307
Dallas, TX 75229
(214) 869-0311

Washington

Fluke Technical Center
6920 Seaway Blvd.
Everett, WA 98206
(206) 356-5560

International

Argentina

Coasin S.A.
(For Fluke products)
Virrey del Pino 4071
Buenos Aires, Argentina
Tel: 522-5248

Philips Argentina S.A.
(For Philips products)
Casilla Correo 3479
1000 Buenos Aires
Tel: 542-2411/51

Australia

Elmeasco Instruments Pty Ltd.
(For Fluke products)
P.O. Box 30
Concord, N.S.W. 2137
Australia
Tel: 736-2888

Elmeasco Instruments Pty. Ltd.
(For Fluke products)
P.O. Box 623
Ringwood, VIC 3134
Australia
Tel: 879-2322

Elmeasco Instruments Pty. Ltd.
(For Fluke products)
PO Box 274
Salisbury, Queensland 4107
Australia
Tel: 875-1444

Philips Scientific &
Industrial Equip. Div.
(For Philips products)
Centrecourt 25-27 Paul St
North Ryde
Sydney N.S.W. 2113
Tel: 88 88 222

Austria

Walter Rekirsch Elektronische
Geräte GmbH & Co.
(For Fluke products)
Vertrieb KG
Obachgasse 28
1220 Vienna, Austria
Tel: 253626

Oesterreichische Philips
Industrie GmbH
(For Philips products)
Abteilung Industrie Elektronik
Triesterstrasse 64
A-1100 Wien
Tel: 645521

Algeria

Bureau de Liaison Philips
(For Philips products)
24 bis rue Bougainville
TI Mouradia, Alger
Tel: 56 56 72

Antillen

Philips Antillana N.V.
(For Philips products)
P.O. Box 523
Willemstad, Curacao
Tel: 414071/74

Bangladesh

Philips Bangla Desh Ltd.
(For Philips products)
P.O. Box 62
Ramna, Dhaka
Tel: 234280

Belgium

N.V. Philips & Mbie Assoc
Scientific & Industrial Div
70 Rue des Deux Gares
Brussels, Belgium
Tel: 2-525 6111

Brazil

Hi-Tek Electronica Ltda.
(For Fluke products)
Al. Amazonas 422
Alphaville, Barueri
CEP 06400 Sao Paulo, Brazil
Tel: 421-5477

Industrias Brasileiras
Philips Ltd.
(For Philips products)
Av. Eng. Luiz Carlos Berrini
3009-7 and CEP 04571
Sao Paulo S.P.
Tel: 241.1611

Canada

Fluke Electronics Canada Inc.
400 Britannia Rd
Unit #1
Mississauga, Ontario L4Z 1Y9
Tel: 416-890-7600

Fluke Electronics Canada, Inc.
(For Fluke products)
1255 Trans Canada Highway
Suite 130
Dorval, Quebec H9P 2V4
Tel: 514-685-0022

Fluke Electronics Canada Inc
(For Fluke products)
101, 1144 29th Ave. N.E.
Calgary, Alberta T2E 7P7
(403) 291-5215

Chile

Intronica Chile Ltda.
(For Fluke products)
Casilla 16228
Santiago 9, Chile
Tel: 2321886

Philips Chiiena S.A.
(For Philips products)
Casilla Postal 2687
Santiago de Chile
Tel: 770038

China, Peoples Republic of

Instrimpex - Fluke Service Center
(For Fluke products)
57, Xisi Dong Da Jie
Xicheng-qu
P.O. Box 9085
Beijing
People's Republic of China
Tel: 65-7281

Colombia

Sistemas E Instrumentacion, Ltda
(For Fluke products)
Carrera 13, No. 37-43, Of. 401
Ap. Aereo 29583
Bogota DE, Colombia
Tel: 232-4532

Denmark

Tage Olson A/S
(For Fluke products)
Ballerup, Byveg 222
2750 Ballerup
Denmark
Tel: 658111

Philips Elektronik Systemer A/S
(For Philips products)
Atd. Industri & Forskning
Prags Boulevard 80-P.B. 1919
DK-2300-Konbenhavn S
Tel: 572222

Ecuador

Proteco Coasm Cia. Ltda.
(For Fluke products)
P.O. Box 228-A
Ave. 12 de Octubre 2285 y
Orellana
Quito, Ecuador
Tel: 526759

Philips Ecuador S A
(For Philips products)
Casilla 343
Quito
Tel: 396100

Egypt and Sudan

Electronic Engineering
Liaison Office
(For Fluke products)
P.O. Box 2891 Horreya
11361 Heliopolis
Cairo, Egypt
Tel: 695705

Philips Egypt Branch
of P.M.O.B.V.
P.O. Box 1687
10 Abadel Rahman el Ratei St
Dokki, Cairo
Tel: 490922

Ethiopia

Philips Ethiopia
(Priv. Ltd. Co.)
(For Philips products)
Ras Aveve Areguay Avenue
P.O. Box 2565
Addis Ababa
Tel: 148300

Finland

Instrumentarium Elektronikka
(For Fluke products)
P.O. Box 64, Vitikka 1
02631 ESPOO 63
Finland
Tel: 358-0-5281

France

OY Philips AB
(For Philips products)
Kaivokatu 8
P.O. Box 255
00101 Helsinki 10
Tel: 1-7271

France

M.B. Electronique S.A
(For Fluke products)
606, Rue Fourny
P.O. Box 31
78530 BUC, France
Tel: 9568131

SA Philips Industrielle
et Commerciale
Science et Industry
(For Philips products)
105 Rue de Paris
93002 Bobigny
Tel: 48301111

Norway

Morgenstjerne & Co. A/S
(For Fluke products)
Konghellegate 3
P.O. Box 6688, Rodelokka
Oslo 5, Norway
Tel: 356110

Norsk Akieselskap
Philips Dept.
Industry and
Telecommunication
Sandstuveien 70
P.O. Box 1
Manglerud
Oslo 6
Tel: 2-680200

Pakistan

Pak International Operations
(For Fluke products)
505 Muhammadi House
I.I. Chundrigar Road
P.O. Box 5323
Karachi Pakistan
Tel: 221127/239052

Philips Electrical Industries
of Pakistan Ltd.
(For Philips products)
Philips Markaz
M.A. Jinnah Road
P.O. Box 7101
Karachi 3, Pakistan
Tel: 725772/9

Paraguay

Philips del Paraguay S.A.
(For Philips products)
Av. Artigas 1497
Casilla Correo 605
Asuncion
Tel 291924

Peru

Importaciones Y Representaciones
Electronicas S.A.
(For Philips products)
Avda. Franklin D. Roosevelt 105
Lima 1, Peru
Tel: 288650

Philips Peruana S.A.
(For Philips products)
Av. Alfonso Ugarte 1268
Apartado 1841
Lima
Tel: 32-6070

Philippines

Spark Radio and Electronics Corp.
(For Fluke products)
Greenhills P.O. Box 610
San Juan Metro-Manila Zip, 3113
Philippines
Tel: 63-2-775192

Philips Industrial Development Inc.
(For Philips products)
2246 Pasong Tamo
Makati, Metro Manila
Tel: 868951

Portugal

Decada Espectral
(For Fluke products)
Equipamentos de Electronica e
Cientificos, SARL
Av. Bombeiros Voluntarios,
Lote 102B
Miraflores/Alges
1495 Lisboa, Portugal
Tel: 2103420

Philips Portuguesa S.A.R.L.
(For Philips products)
Av. Eng. Duarte Pacheco
Appartado 1331
Lisbon-1
Tel: (019) 683121

Singapore

Rank O'Connor's Singapore
(PTE) Ltd.
(For Fluke products)
98 Pasir Panjang Road
Singapore 0511
Republic of Singapore
Tel: 4737944

Philips Project Development
(S) Pte. Ltd.
(For Philips products)
Lorong 1
Toa Payoh
P.O.J Box 340
Singapore 1231
Tel: 2538811

South Africa

Fluke S.A. (Pty) Ltd.
P.O. Box 39127
Bramley 2018
Republic of South Africa
Tel: 786-3647

South African Philips
(Pty) Ltd.
(For Philips products)
P.O.B. 7703
2, Herb Street
New Doornfontein, Johannesburg
2000
Tel: 786-3647

Spain

Equipos Y Sistemas S.A. (ESSA)
(For Fluke products)
C/Apolonio Morales, 13B
Madrid 16, Spain
Tel: 4580150

Philips Iberica S.A.E.
(For Philips products)
Dpto Aparatos de Medida
Marinez Villergas Z Madrid 28027
Tel: 404-2200

Sweden

Svenska A.B. Philips
Div. Industrialelektronik
Avd. Matinstrument
11584 Stockholm
Tel: 782-1800

Switzerland

Traco Electronic AG
(For Philips products)
Jenatschstrasse 1
8002 Zurich
Switzerland
Tel: 2010711

Philips AG
(For Philips products)
S & I Equipment
Allmendstasse 140
Postfach 670
CH-8027 Zurich, Switzerland
Tel: 488221

Syria

Philips Moyen-Orient S.A.
(For Philips products)
Rue Fardoss 79
B.P. 2442 Damascus
Tel 221650

Taiwan

Schmidt Electronics Corp.
(For Fluke products)
5th Floor, Cathay Min-Sheng
Commercial Building
344 Min-Sheng East Road
Taipei, Taiwan, R.O.C.
Tel: 5013468

Yung Kang Trading Co. Ltd.
(For Philips products)
11th Floor CTS Building
102 Kuang Fu South Road
P.O.Box 1467
Taipei
Tel: 752-7421

Tanzania

Philips (Tanzania) Ltd.
(For Philips products)
P.O. Box 20104
Dar es Salaam
Tel: 29571

Thailand

Measuretronix Ltd.
(For Fluke products)
2102/63 Ramkamhaeng Rd.
Bangkok, 10240 Thailand
Tel: 3742516

Philips Electrical Company
of Thailand Ltd.
(For Philips products)
Electronic and Communication
Systems Dept.
283 Silom Road
P.O. Box 961
Bangkok 10
Tel: 233-63330/9

Tunisia

S.T.I.E.T.
(For Philips products)
32 bis
Rue Ben Ghedhahem
Tunis
Tel: 244268

Turkey

Erkman Elektronik Aletler
(For Fluke products)
Ticaret Anonim Sirketi
Necatiby Cad 92/3
Karakoy, Istanbul, Turkey
Tel: 441546

Turk Philips Ticaret A.S.
(For Philips products)
Posta Kutusu 504
Beykoglu Istanbul
Tel: 1435910

United Arab Emirates

Philips Middle East b.v.
(For Philips products)
Dubai Int'l Trade Centre
Level 11
P.O. Box 6269
Dubai
Tel: 377000

Uruguay

Coasin Uruguaya S.A.
(For Fluke products)
Casilla de Correo 1400
Libertad 2529
Montevideo, Uruguay
Tel: 789015
Industrias Philips del Uruguay
(For Philips products)
Avda Uruguay 1287
Casilla de Correo 294
Montevideo
Tel: 915641

Venezuela

Coasin C.A.
(For Fluke products)
Calle 9 Con Calle 4
Edif. Edinurbi
Apartado de Correos Nr-70 136
Los Ruices
Caracas 1070-A, Venezuela
Tel: 241-0309

Industias Venezolanas
Philips S.A.
(For Philips products)
Av Ppal de los Ruices
Apartado Postal 1167
Caracas
Tel: 239-3811

Zaire

S.A.M.E. s.z.r.l.
(For Philips products)
B.P. 16636
Kinshasa
Tel: 31693

Zambia

Philips Electrica Zambia Ltd
(For Philips products)
Mwembeshi Road
P.O. Box 31878
Lusaka
Tel: 218511

Zimbabwe

Philips Electric (Pvt.) Ltd.
(For Philips products)
P.O. Box 994
62 Umtali Road
Beverley, Harare
Tel: 47211

Germany (F.R.G.)

Philips GmbH
Unternehmensbereich Elektronik
für Wissenschaft und Industrie
Werk für Messtechnik
Oskar-Messter-Str. 18
8045 Ismaning
Deutschland
Tel: (089) 96050

Great Britain

Philips Scientific Test
& Measuring Division
(For Fluke products)
Colonial Way
Watford Herts WD2 4TT
United Kingdom
Tel: 0923-240511

Pye Unicam Ltd.
(For Philips products)
York Street
Cambridge CB1 2PX
Tel: 923-40511

Greece

Hellenic Scientific
Representations Ltd.
(For Fluke products)
11 Vrassida Street
Athens 612, Greece
Tel: 7211140

Philips S.A. Hellenique
(For Philips products)
P.O. Box 153
54 Ave Syngrou
Athens
Tel: 9215311

Hong Kong

Schmidt & Co (H.K.) Ltd.
(For Fluke products)
18th Fl., Great Eagle Centre
23 Harbour Road
Wanchai, Hong Kong
Tel: 8330-222

Philips Hong Kong Ltd.
(For Philips products)
P.O.B. 2108
27-29 Floor
Hopewill Centre
17, Kennedy Road
Hong Kong
Tel: 5-283298

Iceland

Heimelistaeki SF
(For Philips products)
Saetun 8
Reykjavik
Tel: 24000

India

Hinditron Services Pvt. Ltd.
(For Fluke products)
1st Floor, 17-B, Mahal
Industrial Estate
Mahakali Road Andheri East
Bombay 400 093, India
Tel: 6300043

Hinditron Services Pvt. Ltd.
(For Fluke products)
33/44A Raj Maha Villas Extn.
8th Main Road
Bangalore 560 080, India
Tel: 363139

Hinditron Services Pvt. Ltd.
(For Fluke products)
15 Community Centre
Panchshila Park
New Delhi, 110 017, India
Tel: 6433675

Hinditron Services Pvt. Ltd.
Field Service Center
(For Fluke products)
Emerald Complex 1-7-264
5th Floor
114 Sarojini Devi Road
Secunderabad 500 003, India
Tel: 821117

Peico Electronic &
Electricals Ltd.
(For Philips products)
Shivsagar Estate
Block "A"
Dr. Annie Besant Road
P.O.B. 6598
Worli, Bombay 400 018
Tel: 4921500

Indonesia

P.T. Lamda Triguna
(For Fluke products)
P.O. Box 6/JATJG
Jakarta 13001, Indonesia
Tel: 8195365

P.T. Daeng Brothers
(For Philips products)
Centre Point Bldg - 3rd Floor
Jl Jend. Gatot Suggroto
Kav. 35/36
P.O. Box 41 Tebet
Jakarta 12950
Tel: 517335

Iran

Philips Iran Ltd.
(For Philips products)
P.O.B. 1297
Teheran
Tel: 372081/5

Iraq

Philips Iraq W.L.L.
(For Philips products)
Munir Abbas Building
4th Floor South Gate
P.O. Box 5749
Baghdad
Tel: 880409

Ireland

Philips Electrical
(Ireland) Ltd.
(For Philips products)
Newstead
Clonskeagh, Dublin 14
Tel: 693355

Israel

R.D.T. Electronics
Engineering Ltd.
P.O. Box 43137
Tel Aviv 61430
Israel
Tel: 483211

Italy

Sistrel S.p.A.
(For Fluke products)
Via Pelizza da Volpedo 59
20092 Cinisello Balsamo
Milan, Italy
Tel: 6181893

Philips S.p.A.
(For Philips products)
Sezione S & I T & M Dept.
Viale Elvezia 2
20052 Monza
Tel: (039) 3635.1

Japan

John Fluke Mfg. Co., Inc.
Japan Branch
(For Fluke products)
Sumitomo Higashi Shinbashi Bldg.
1-1-11 Hamamatsucho
Minato-ku, Tokyo 105, Japan
Tel: 434-0181

Nihon Philips Corporation
(For Philips products)
Shuwa Shinagawa Building
26-38 Takanawa 3-chrome
Minato-ku, Tokyo 108
Tel: 4485511

Kenya

Philips (Kenya) Ltd.
(For Philips products)
P.O. Box 30554
Nairobi
Tel: 557999

Korea

Myoung Corporation
(For Fluke products)
Yeo Eui Do P.O. Box 14
Seoul, Korea
Tel: 784-9942

Philips Elelectronics
(Korea) Ltd.
(For Philips products)
C.P.O. Box 3680
Seoul, Korea
Tel: 794-5011/5

Lebanon

Philips Middle East S.A.R.L.
(For Philips products)
P.O. Box 11-670
Beirut
Tel: 285748/9

Malaysia

Mecomb Malaysia Sdn. Bhd.
(For Fluke products)
P.O. Box 24
46700 Petaling Jaya
Selangor, Malaysia
Tel: 774-3422

Electronic System (Malaysia)
Sdn. Bhd.
(For Philips products)
Resource Plaza
No. 4 Persiaran Barat
P.O. Box 12163
Petaling Jaya
Selangor, Kuala Lumpur
Tel 554511/24

Mexico

Mexicana de Electronica
Industrial,
S.A. (Mexel)
(For Fluke products)
Diagonal No. 27
Entre Calle de Eugenia Y Ave
Colonia del Valle
C.P. 03100, Mexico
Tel: 660-4323

Apesa Electronica S.A. de C.V.
(For Philips products)
Apartado Postal 213
C.P. 50140
Toluca Edo de Mexico

Morocco

S.A.M.T.E.L.
(For Philips products)
2 Rue de Bapaume
Casablanca
Tel: 243050

Netherlands

Philips Nederland
Test & Meetapparaten
(For Fluke products)
Hoevenseweg 55A,
5017 AD Tilburg
Postbus 115, 5000 AC Tilburg
Nederland
35 24 55

Philips Nederland B.V.
(For Philips products)
Boschdijk 525
Gebouw VB
5600 MD Eindhoven
Tel: 782808

New Zealand

Northrop Instruments
& Systems Ltd.
(For Fluke products)
459 Kyber Pass Road,
Private Bag, Newmarket
Auckland 1, New Zealand
Tel: 501-801

Northrop Instruments
& Systems Ltd.
(For Fluke products)
First Floor, Northrop Bldg.
189-191 Willis Street
P.O. Box 2406
Wellington, New Zealand
Tel: 856-658

Philips Electrical Ind. Ltd.
(For Philips products)
Scientific & Industrial Div
68-86 Jervois Quay
P.O. Box 2097
Wellington C1
Tel: 735735

Nigeria

Associated Electronic Products
(Nigeria) Ltd.
(For Philips products)
Km. 16 Ikorodu Road
Ojota
P.O. Box 1921
Lagos
Tel: 932825

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>